ILS or LOC RWY 18

UNIVERSITY OF OKLAHOMA WESTHEIMER (OUN)

LOC/DME I-BWM	APP CRS	Rwy Ldg	5199
111.95	177°	TDZE	1182
Chan 56 (Y)		Apt Elev	1182


DME required.


Circling NA southeast of Rwy 3-21. VDP NA when using OKC altimeter setting.
When local altimeter setting not received, use OKC altimeter setting: increase S-ILS 18 DA to 1423 feet; increase all MDAs 60 feet, S-LOC 18 visibility Cats C and D 1/8 SM, and Circling visibility Cats C and D 1/4 SM; increase JIXPU fix minimums S-LOC 18 visibility Cats C and D 1/8 SM, and Circling visibility Cats C and D 1/4 SM.

MALSR


MISSED APPROACH: Climbing right turn to 3100 on heading 185° and IRW VORTAC R-155 to WETIX/IRW VORTAC 22.4 DME and hold.

AWOS-3PT	OKE CITY APP CON	WESTHEIMER TOWER★	GND CON	UNICOM
119.55	120.45 288.325	118.0 (CTAF) L	121.6	122.95

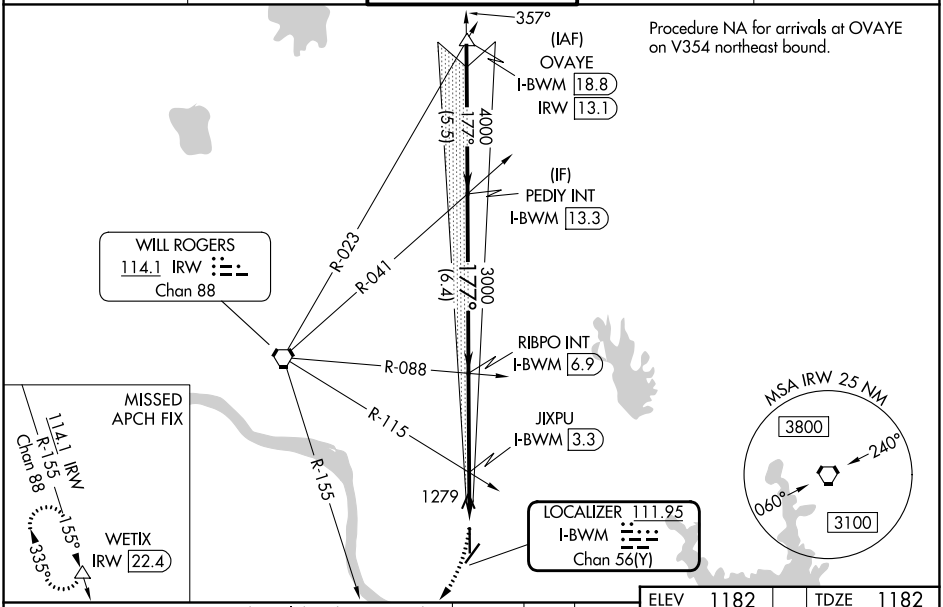

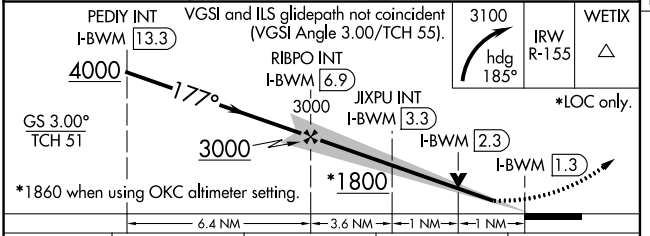

CATEGORY	A	B	C	D
S-ILS 18	1382-1/2	200 (200-1/2)		
S-LOC 18	1800-1/2	618 (700-1/2)	1800-1 3/8	618 (700-1 3/8)
CIRCLING	1800-1	618 (700-1)	1940-2 1/4 758 (800-2 1/4)	1940-2 1/2 758 (800-2 1/2)
JIXPU FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 18	1540-1/2	358 (400-1/2)	1540-5/8	358 (400-5/8)
CIRCLING	1660-1	478 (500-1)	1940-2 1/4 758 (800-2 1/4)	1940-2 1/2 758 (800-2 1/2)

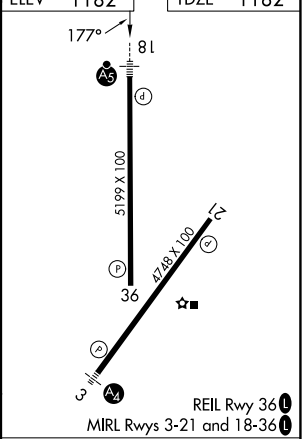

FAF to MAP 5.6 NM

Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026