


Flight Procedures Cover Page	Task Action: P-NOTAM	Task Type: IAP	Estimated Chart Date: 06/15/2023	APWS Task ID: 2BA0A6862F514922B10AE133356056E9	APWS Project ID: 2ED34472ABC246B9B85550B46B2C04B9
Procedure: ILS OR LOC RWY 22R AMDT 3B		Enroute: NO	Specialist: Dumar, Ralph		Agreement Number:
Airport ID: KLIT			Airport City: LITTLE ROCK		State: AR
Facility ID:	Facility Type:	Flight Inspection Remark Type:			
Procedure Comments: PROCESSED IAW TECHNICAL SUPPORT GROUP (AJF-17) MEMO DATED 07/07/2021 GUIDANCE FOR PROCEDURAL CHANGES REQUIRING FLIGHT INSPECTION/VALIDATION. ACTIVE AIRPORT, RUNWAY, AND NAVAID DATA USED. REMARKS: P-NOTAM TO CLEAR NTM - FDC 0/3028. CONTACT RAKE MCGRAW (405) 954-8711. THIS IS A CORRECTED COPY OF THE FORM APPROVED ON 01/26/23. 1. ADDED 'ILS RWY 22R (SA CAT I), AMDT 3A, ILS RWY 22R (CAT II), AMDT 3A, AND ILS RWY 22R (CAT III), AMDT 3A' TO LIST OF CHARTS AFFECTED BY P-NOTAM - REQUESTED BY CHARTING. 2. ADDED 'DELETE ASTERISK IN PROFILE FROM VDP AT 2.52 DME/1.04 NM TO THLD' - PREVIOUSLY OMITTED.					



ILS or LOC RWY 22R
BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

V Simultaneous approach authorized with Rwy 22L VDP NA when using Stuttgart altimeter setting. When local altimeter setting not received, use Stuttgart altimeter setting; increase all DA to 544 feet and increase S-ILS all Cats visibility to RVR 2200; increase all MDAs 100 feet and increase S-LOC Cat C/D visibility to RVR 5500, and Circling Cat B visibility to 1½ SM, Cat C visibility to 3 SM. For inop ALS, increase S-LOC Cat C/D visibility to RVR 6000. For inop ALS when using Stuttgart altimeter setting, increase S-ILS all Cats visibility to RVR 4500 and S-LOC Cat C/D visibility to 1½ SM.

MISSED APPROACH:
Climb to 1000 then
climbing right turn to
2300 on LIT VORTAC
R-250 to BEGAN INT/
LIT 22 DME and hold.

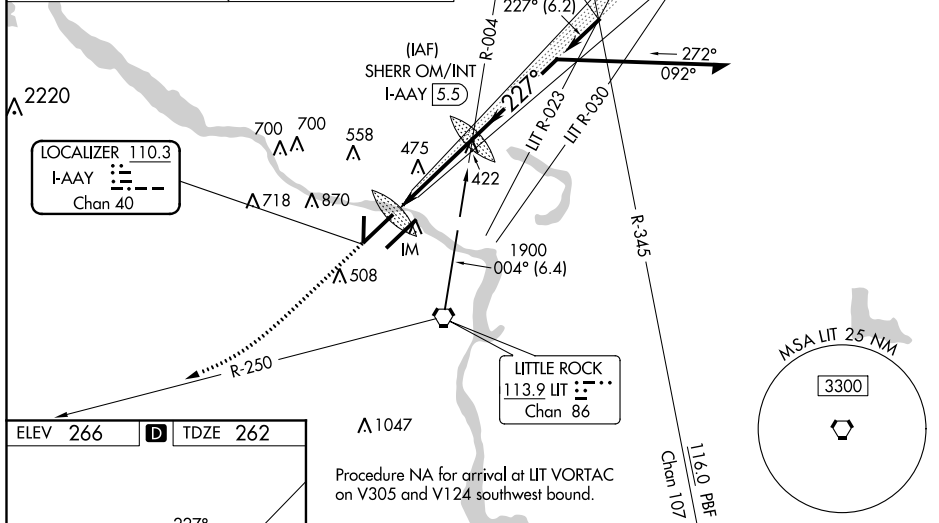[illegible][illegible]

LITTLE ROCK, ARKANSAS

AL-233 (FAA)

22307

LOC/DME I-AAY 110.3 Chan 40	APP CRS 227°	Rwy Idg 8273 TDZE 262 Apt Elev 266
--	------------------------	---



ILS RWY 22R (SA CAT I)
BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

ILS RWY 22R (SA CAT I)

DME required.


T	Simultaneous approach authorized with Rwy 22L.
A	Requires specific OPSPEC, MSPEC, or LOA approval and use of HUD to DA.

ALSF-2




MISSED APPROACH: Climb to 1000 then climbing right turn to 2300 on LIT VORTAC R-250 to BEGAN INT/LIT 22 DME and hold.

D-ATIS	LITTLE ROCK APP CON	ADAMS TOWER	GND CON	CLNC DEL
125.65	135.4 353.6	118.7 257.8	121.9 339.8	118.95

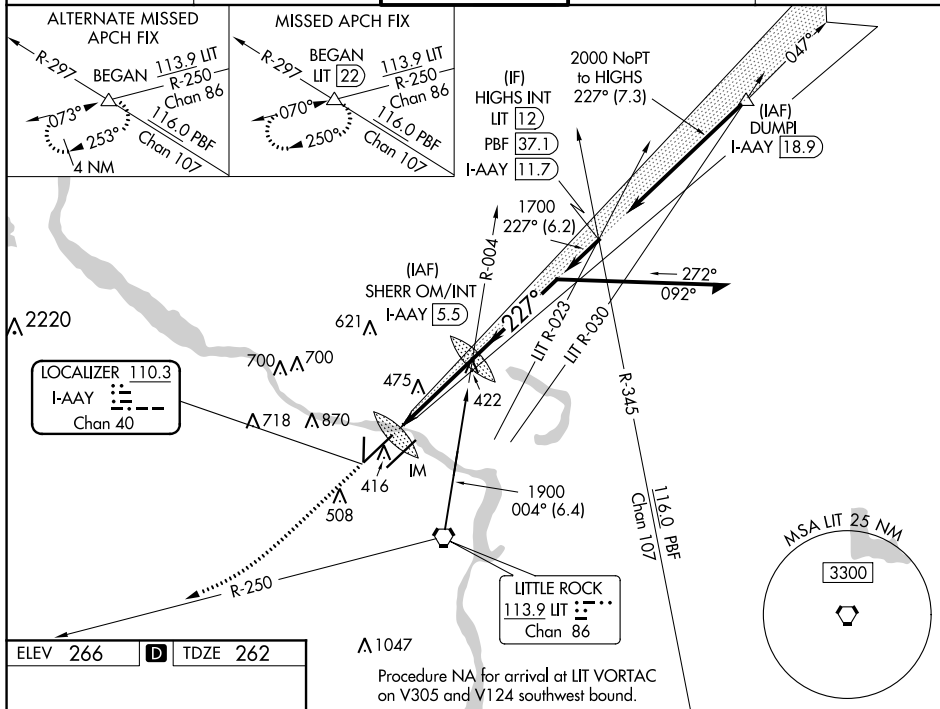

ELEV 266	D	TDZE 262
----------	----------	----------



MIRL Rwy 18-36
HIRL Rwy 4R-22L and 4L-22R
TDZ/CL Rwy 4L, 4R, 22L and 22R

SA CATEGORY I ILS - SPECIAL AIRCREW
& AIRCRAFT CERTIFICATION REQUIRED

LITTLE ROCK, ARKANSAS

Amdt 3A 08NOV18

BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

34°44'N-92°13'W

ILS RWY 22R (SA CAT I)

SC-1, 03 NOV 2022 to 01 DEC 2022



DME required.

Simultaneous approach authorized with Rwy 22L.

ALSF-2

MISSED APPROACH: Climb to 1000 then climbing right turn to 2300 on UT VORTAC R-250 to BEGAN INT/LIT 22 DME and hold.

D-ATIS	LITTLE ROCK APP CON	ADAMS TOWER	GND CON	CLNC DEL
125.65	135.4 353.6	118.7 257.8	121.9 339.8	118.95

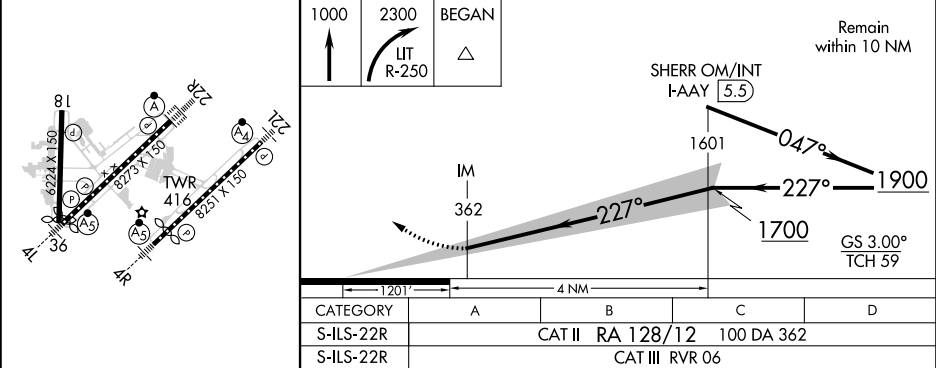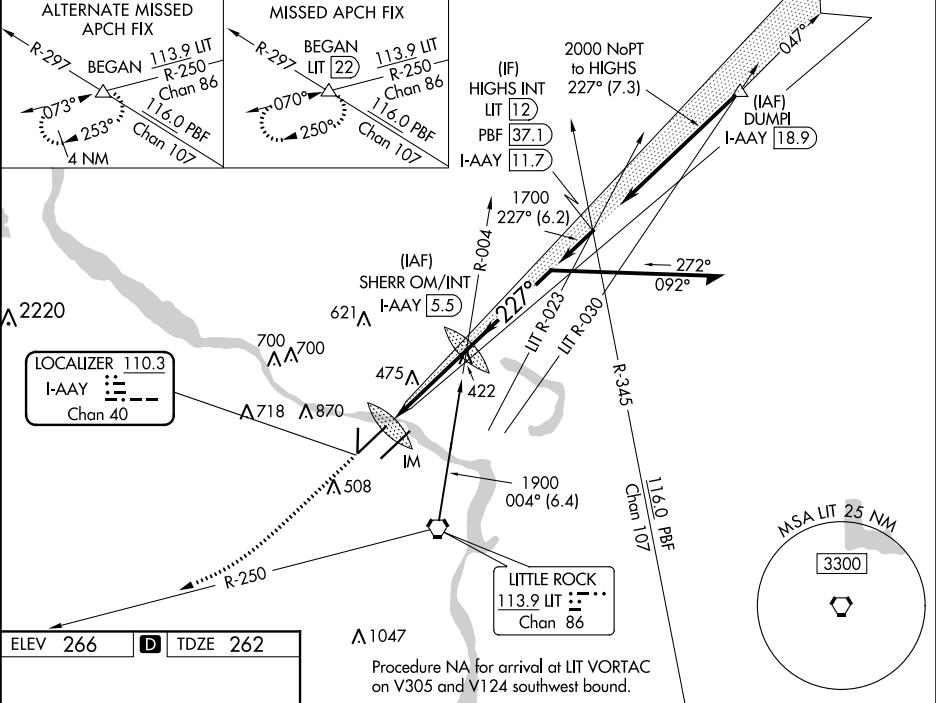

KLIT
Bill and Hillary Clinton NTL/Adams Fld
Little Rock, AR
ILS or LOC Rwy 22R, Amdt 3B
1:100,000

