

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 6/11/2026	APWS Task ID: 2DC27DA6A2CC4F5BBF13C16E87D4B140	APWS Project ID: EF0DAF0C65044C72B5CA799B3DC52438
Procedure: RNAV (GPS) RWY 28R AMDT 1D		Enroute: NO	Specialist: Smith, Rodney		Agreement Number:
Airport ID: KMYF			Airport City: SAN DIEGO		State: CA
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: ACTIVE AIRPORT DATA USED. CLEARs NOTAM 5/9381. POC KYLE THOMPSON 954-405-2135. QUALITY 23 CHECKED QUALITY 24 CHECKED					

FIPC BASIC FORM						
PROCEDURE: RNAV (GPS) RWY 28R AMDT 1D			AIRPORT NAME: MONTGOMERY-GIBBS EXEC		AIRPORT ID: KMYF	SPECIAL CONTROL NO: SG-02-309-26
FAC ID: KMYF28R.01		CITY: SAN DIEGO			ST: CA	ORIG CHART DATE: 06/11/2026
DFL TYPE: PROC/S	THIRD PARTY: ☐ YES	EST. TIME ON SITE: 0.4	REIMB. NUMBER:	PTS TASK ID: 2DC27DA6A2CC4F5BBF13C16E87D4B140		
PREFLIGHT NOTES						
REVIEWER:					DATE:	
COMMENTS:					CHECK ONE: ☐ FLT CK REQ ☐ NFCR ☐ REJECT	
						YES
					CPV COMPLETE? ☒ X ☐ NO	
PROCEDURE RESULTS						
INSPECTION DATE: 03/31/2026	CREW #: VN141	N #: N72	INSTRUMENT PROCEDURE STATUS: ☒ SAT ☐ SAT W/CHANGES ☐ UNSAT		ARINC CODING: ☐ SAT ☐ SAT/GOLD ☐ UNSAT	
FLIGHT INSPECTOR SIGNATURE: james l reinebold @ 03/31/2026 19:54			PRINTED NAME: REINEBOLD, JAMES LUTHER			NOTAM INITIATED? ☐ YES ☒ NO
FLIGHT INSPECTOR REMARKS: Flown as designed. Obstacles verified. Runway survey SAT. Complete SAT.						
IN-FLIGHT OBSTACLE REPORT						
OBSTRUCTION ID #:	COORDINATES OR LOCATION:	GNSS ALTITUDE (MSL):	BAROMETRIC ALTITUDE (MSL):	HEIGHT ABOVE GROUND LEVEL:		

WAAS CH 45710 W28A	APP CRS 281°	Rwy ldg 4598 TDZE 423 APT Elev 427
--------------------------	------------------------	---


RNAV (GPS) RWY 28R

MONTGOMERY-GIBBS EXEC (KMYF)

RNP APCH - GPS	MISSED APPROACH: CLIMB TO 3000 DIRECT JOPDO AND ON TRACK 326.57 TO CARIF AND HOLD.
RWY 28R HELICOPTER VISIBILITY REDUCTION BELOW 3/4 SM NOT AUTHORIZED. CIRCLING RWY 10L, 23, 28L NA AT NIGHT. FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -15°C OR ABOVE 54°C.	

ATIS 126.9	SOCAL APP CON 124.35 279.625	MONTGOMERY TOWER 119.2 (CTAF) 269.4 (5, 10L/R, 23, 28L) 125.7 269.4 (28R)	GND CON 118.225	UNICOM 123.075
----------------------	--	--	---------------------------	--------------------------

PROTOTYPE-NOT FOR NAVIGATION

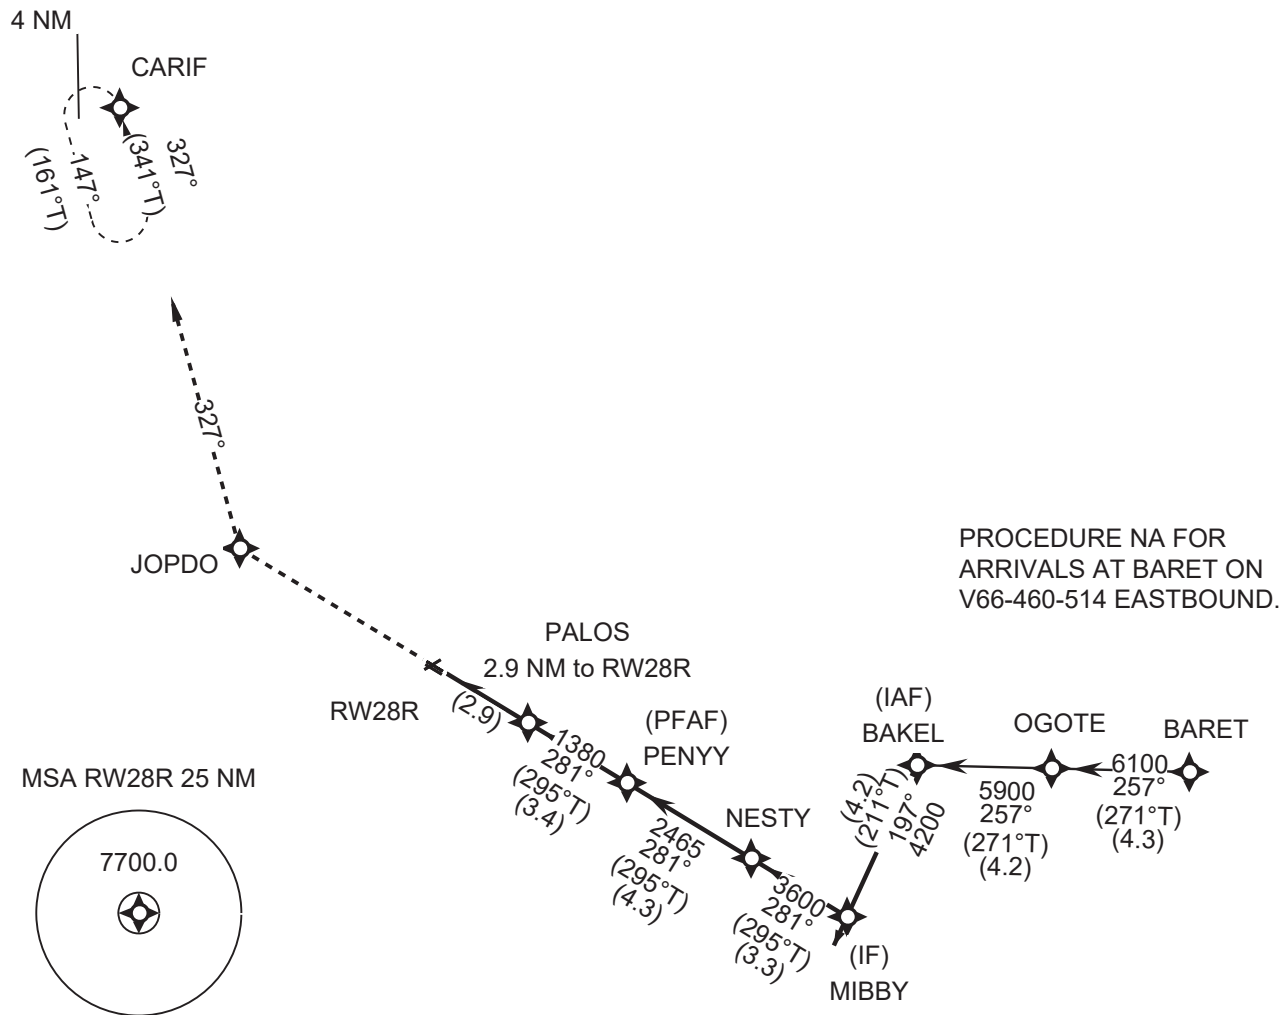

3000	JOPDO	tr 327°	CARIF						
↑	✧	↗	✧						
				RW28R	1.18 NM to RW28R	PALOS 2.9 NM to RW28R	PENYY	NESTY	MIBBY
				↖	↓		↘		
					1380		2500	3600	281° (295°T)
				1.2 NM	1.7 NM	3.4 NM	4.3 NM	3.3 NM	
CATEGORY	A		B		C		D		
LPV	673-3/4 250 (300- 3/4)				NA				
LNAV/VNAV	750-3/4 327 (400- 3/4)				NA				
LNAV	840-3/4 417 (500- 3/4)				NA				
CIRCLING	920-1 493 (500- 1)				NA				

25275

RNAV (GPS) RWY 28R
MONTGOMERY-GIBBS EXEC (MYF)

MISSED APPROACH: Climb to 3000 direct JOPDO and on track 327° to CARIF and hold.



Diagram illustrating a flight track or search area, showing various waypoints, altitudes, headings, and distances.

Waypoints and Data:

- JOPDO**: Starting point, indicated by a star symbol.
- RW28R**: Waypoint, indicated by a star symbol. Altitude: 554.
- PALOS**: Waypoint, indicated by a star symbol. Distance to RW28R: 2.9 NM.
- (FAF) PENYY**: Waypoint, indicated by a star symbol. Altitude: 2500. Distance to PALOS: 4.3.
- NESTY**: Waypoint, indicated by a star symbol. Altitude: 3600. Distance to (FAF) PENYY: 4.3.
- (IAF) BAKEL**: Waypoint, indicated by a star symbol. Altitude: 4200. Distance to NESTY: 4.2.
- (IF) MIBBY**: Waypoint, indicated by a star symbol. Altitude: 2810. Distance to (IAF) BAKEL: 4.2.
- OGOTE**: Waypoint, indicated by a star symbol. Altitude: 5900. Distance to (IF) MIBBY: 4.3.
- BARE**: End point, indicated by a triangle symbol. Altitude: 6100. Distance to OGOTE: 4.3.

Headings and Distances:

- Heading from JOPDO to RW28R: 327°.
- Heading from RW28R to PALOS: 327°.
- Heading from PALOS to (FAF) PENYY: 257°.
- Heading from (FAF) PENYY to NESTY: 257°.
- Heading from NESTY to (IAF) BAKEL: 281°.
- Heading from (IAF) BAKEL to (IF) MIBBY: 197°.
- Heading from (IF) MIBBY to OGOTE: 257°.
- Heading from OGOTE to BARE: 257°.

Other Information:

- MSA RW28R 25 NM**: Minimum Safe Altitude (MSA) for RW28R, 25 NM radius. Altitude: 7800.
- MISSED APCH FIX**: Missed Approach Fix, indicated by a star symbol. Altitude: 4 NM.
- CARIF**: Waypoint, indicated by a triangle symbol.

SW-3, 27 NOV 2025 to 25 DEC 2025

3000 ↑	JOPDO ✦	tr 327°	CARIF △					
* LNAV only								
RW28R 1.2 NM 1.7 NM PALOS 2.9 NM to RW28R 1380* 3.4 NM PENNY 2500 4.3 NM NESTY 3600 281° 4200 GP 3.00 TCH 41								
CATEGORY		A		B		C		D
LPV	DA	673- ³ / ₄	250 (300- ³ / ₄)			NA		
LNAV/ VNAV	DA	750- ³ / ₄	327 (400- ³ / ₄)			NA		
LNAV	MDA	840- ³ / ₄	417 (500- ³ / ₄)			NA		
CIRCLING		920-1	493 (500-1)			NA		

MONTGOMERY-GIBBS EXEC (MYF)
RNAV (GPS) RWY 28R