

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: Graphical DP	Estimated Chart Date: 10/02/2025	APWS Task ID: 3D4F05A19FC8436EBE5B393BCD209465	APWS Project ID: 5C407E87644D48B9AC0A65B3D14390E0
Procedure: LAMON FOUR DEPARTURE (OBSTACLE) (RNAV)		Enroute: YES	Specialist: Palmer, Leo		Agreement Number:
Airport ID: KDIJ			Airport City: DRIGGS		State: ID
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
<div>Procedure Comments:</div> <div>RWY 22 EXTENSION AND RWY 4 THRESHOLD RELOCATION.</div> <div>PENDING AIRPORT AIRNAV DATA USED: PUB'D 10/2/2025</div> <div>CONTACT DAVE DANNER (405)954-5077</div> <div>06/11/2025: THIS IS AN UPDATED COPY OY THE FORM DEVELOPED ON 03/21/2025.</div> <div>ADDED 10/02/2025 TO ACTUAL EFFECTIVE DATE.</div> <div><div>QUALITY 38 CHECKED</div><div>QUALITY 42 CHECKED</div></div>					

(LAMON4.LAMON) FIG

AL-9117 (FAA)


DRIGGS/REED MEML (DIJ)

# LAMON FOUR DEPARTURE (OBSTACLE) (RNAV)


DRIGGS, IDAHO

RNAV1 - GPS-1

SALT LAKE CENTER  
128.35 239.25



PROTOTYPE: NOT  
FOR NAVIGATION



6757

(228° T)

216°

6757

(048° T)

036°

6757

## TAKEOFF MINIMUMS

Rwy 4: Standard with a minimum climb of  
340' per NM to 7400.

Rwy 22: Standard with a minimum climb of  
215' per NM to 7700.

NOTE: Chart not to scale.

## DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 4: Climb on heading 036° to 6757, then climbing left turn  
direct LAMON, thence. . . .

TAKEOFF RUNWAY 22: Climb on heading 216° to 6757, then climbing right turn  
direct LAMON, thence. . . .

. . . .continue climb in hold to cross LAMON at or above 13000 before proceeding  
on course.

LAMON FOUR DEPARTURE (OBSTACLE) (RNAV)

(LAMON4.LAMON) FIG

DRIGGS, IDAHO

DRIGGS/REED MEML (DIJ)

AUTOMATED AL-9117 LAMON DEPARTURE

NW-1

28 APR 2025

COMPILER: CG

REVIEWER:

DBL CHKR:

EFF: FIG

## LAMON FOUR DEPARTURE (OBSTACLE) (RNAV)

## TAKEOFF OBSTACLE NOTES

Rwy 4: Agricultural equipment beginning 72' from DER, 423' left of centerline, up to 20' AGL/6272' MSL.  
 Tree, terrain beginning 73' from DER, 387' right of centerline, up to 8' AGL/6270' MSL.  
 Agricultural equipment 186' from DER, 286' left of centerline, up to 20' AGL/6274' MSL.  
 Agricultural equipment beginning 218' from DER, 116' left of centerline, up to 20' AGL/6275' MSL.  
 Agricultural equipment beginning 282' from DER, 3' right of centerline, up to 17' AGL/6279' MSL.  
 Agricultural equipment beginning 315' from DER, 107' right of centerline, up to 17' AGL/6280' MSL.  
 Agricultural equipment beginning 386' from DER, 4' right of centerline, up to 17' AGL/6282' MSL.  
 Agricultural equipment beginning 481' from DER, 109' left of centerline, up to 17' AGL/6276' MSL.  
 Agricultural equipment 506' from DER 572' right of centerline 17' AGL/6283' MSL.  
 Agricultural equipment beginning 513' from DER, 4' right of centerline, up to 17' AGL/6284' MSL.  
 Agricultural equipment beginning 546' from DER, 218' left of centerline, up to 17' AGL/6277' MSL.  
 Agricultural equipment beginning 645' from DER, 94' left of centerline, up to 17' AGL/6278' MSL.  
 Agricultural equipment beginning 651' from DER, 12' right of centerline, up to 17' AGL/6287' MSL.  
 Agricultural equipment beginning 774' from DER, 138' right of centerline, up to 17' AGL/6288' MSL.  
 Agricultural equipment 777' from DER 101' left of centerline 17' AGL/6279' MSL.  
 Agricultural equipment beginning 877' from DER, 68' right of centerline, up to 17' AGL/6290' MSL.  
 Agricultural equipment 888' from DER 60' left of centerline 17' AGL/6281' MSL.  
 Agricultural equipment beginning 927' from DER, 56' right of centerline, up to 17' AGL/6291' MSL.  
 Agricultural equipment beginning 1050' from DER, 164' right of centerline, up to 17' AGL/6293' MSL.  
 Agricultural equipment beginning 1186' from DER, 266' right of centerline, up to 17' AGL/6294' MSL.  
 Terrain, trees beginning 1261' from DER, 771' left of centerline, 6396' MSL.  
 Agricultural equipment beginning 1300' from DER, 500' right of centerline, up to 17' AGL/6296' MSL.  
 Agricultural equipment beginning 1406' from DER, 604' right of centerline, up to 17' AGL/6297' MSL.  
 Agricultural equipment beginning 1534' from DER, 722' right of centerline, up to 17' AGL/6298' MSL.  
 Agricultural equipment 1609' from DER, 908' right of centerline, up to 17' AGL/6299' MSL.

Rwy 22: Terrain, fence beginning 8' from DER, 290' left of centerline, up to 6169' MSL.  
 Building 22' from DER, 477' right of centerline, 10' AGL/6175' MSL.  
 Vehicles on road 511' from DER 608' left of centerline 6179' MSL.  
 Light poles 644' from DER, 424' right of centerline, 28' AGL/6184' MSL.  
 Building 816' from DER, 716' right of centerline, 30' AGL/6191' MSL.  
 Tree 1001' from DER, 443' right of centerline, 46' AGL/6196' MSL.

PROTOTYPE: NOT  
FOR NAVIGATION

AUTOMATED AL-9117 LAMON DEPARTURE

NW-1

28 APR 2025  
 COMPILER: CG  
 REVIEWER:  
 DBL CHKR:  
 EFF: FIG

OLD


(LAMON3.LAMON) 23278

AL-9117 (FAA)

DRIGGS/REED MEML (DIJ)  
DRIGGS, IDAHO

## LAMON THREE DEPARTURE (OBSTACLE) (RNAV)

SALT LAKE CENTER  
128.35 239.25  
UNICOM  
122.7 (CTAF)

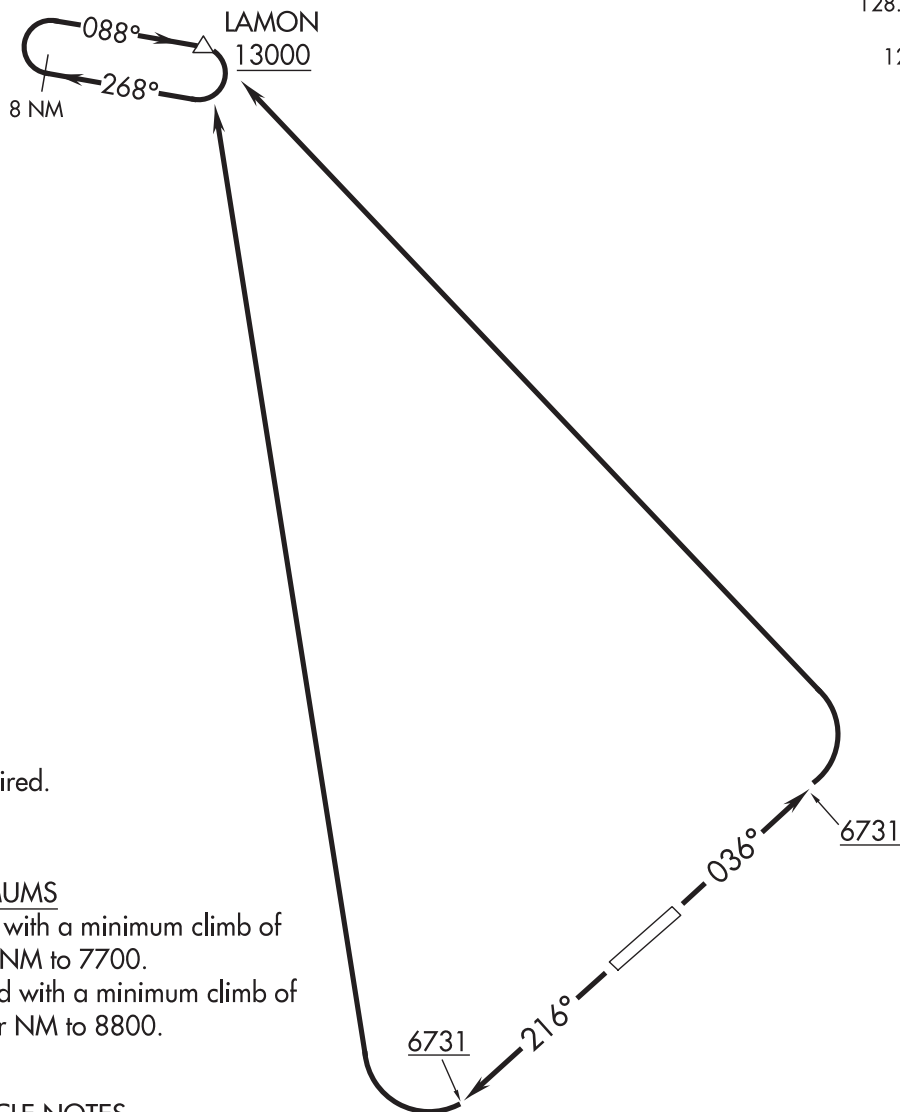

NOTE: GPS required.

NOTE: RNAV 1.

### TAKEOFF MINIMUMS

Rwy 4: Standard with a minimum climb of 245' per NM to 7700.

Rwy 22: Standard with a minimum climb of 253' per NM to 8800.

### TAKEOFF OBSTACLE NOTES

Rwy 4: Fence 35' from DER, 288' right of centerline, 5' AGL/6238' MSL.

Tree 498' from DER, 266' right of centerline, 6246' MSL.

Tree 1029' from DER, 402' left of centerline, 6266' MSL.

Vehicle on road 1320' from DER, 17' left of centerline, 15' AGL/6246' MSL.

Vehicle on road 1355' from DER, 264' right of centerline, 15' AGL/6267' MSL.

Tree 1908' from DER, 409' right of centerline, 6282' MSL.

Rwy 22: Multiple buildings beginning 73' from DER, 463' right of centerline, up to 50' AGL/6167' MSL.

NOTE: Chart not to scale.

### DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 4: Climb on heading 036° to 6731, then climbing left turn direct LAMON. Thence. . .

TAKEOFF RUNWAY 22: Climb on heading 216° to 6731, then climbing right turn direct LAMON. Thence. . .

. . . continue climb in LAMON holding pattern to cross LAMON at or above 13000 before proceeding on course.

LAMON THREE DEPARTURE (OBSTACLE) (RNAV)  
(LAMON3.LAMON) 25FEB21

DRIGGS, IDAHO  
DRIGGS/REED MEML (DIJ)

NW-1, 17 APR 2025 to 15 MAY 2025

NW-1, 17 APR 2025 to 15 MAY 2025







