

Flight Procedures Cover Page	Task Action: P-NOTAM	Task Type: IAP	Estimated Chart Date: 11/04/2021	APWS Task ID: 42A7F6C7C78D47838F3CE798A9032785	APWS Project ID: 785E4D5FDF55484BB464D763D107E979
Procedure: RNAV (GPS) RWY 35 AMDT 1B		Enroute: NO	Specialist: Thibodeaux, Charles		Agreement Number:
Airport ID: KBMG			Airport City: BLOOMINGTON		State: IN
Facility ID:	Facility Type:	Flight Inspection Remark Type:			

Procedure Comments:
 ORDER 8260.3, CHAPTER 2, NEW CIRCLING CRITERIA APPLIED
 CONTACT JASON KRETSCHMER, AJV-A421, 405-954-4019

Digitally signed by
JASON KRETSCHMER
 Sep 01, 2021

Digitally signed by
MARY MCDONALD
 Sep 01, 2021

QUALITY
47
CHECKED

QUALITY
12
CHECKED

WAAS CH 72812 W35A	APP CRS 354°	Rwy Idg TDZE Apt Elev	6500 844 846
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

MONROE COUNTY (BMG)



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Terre Haute Rgnl altimeter setting and increase all DA 121 feet and all MDA 140 feet and increase LPV all Cats, LNAV Cat C, D and Circling Cat D visibility ½ mile, LNAV/VNAV all Cats and Circling C visibility ½ mile. For inoperative MALSR when using Terre Haute Rgnl altimeter setting: increase LPV all Cats visibility ½ mile. Baro-VNAV and VDP NA when using Terre Haute Rgnl altimeter setting. Circling to Rwy 6/24 NA at night.


MALSR



MISSED APPROACH:
Climb to 3000 direct
ITYEF and hold.

ASOS 134.525	HULMAN APP CON 128.025 339.8	BLOOMINGTON TOWER ★ 120.775 (CTAF) 0	GND CON 121.9	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

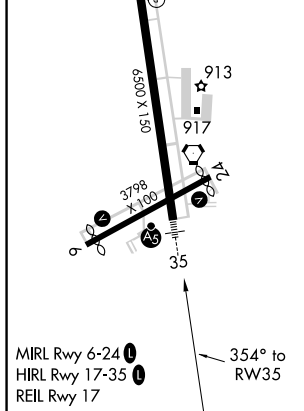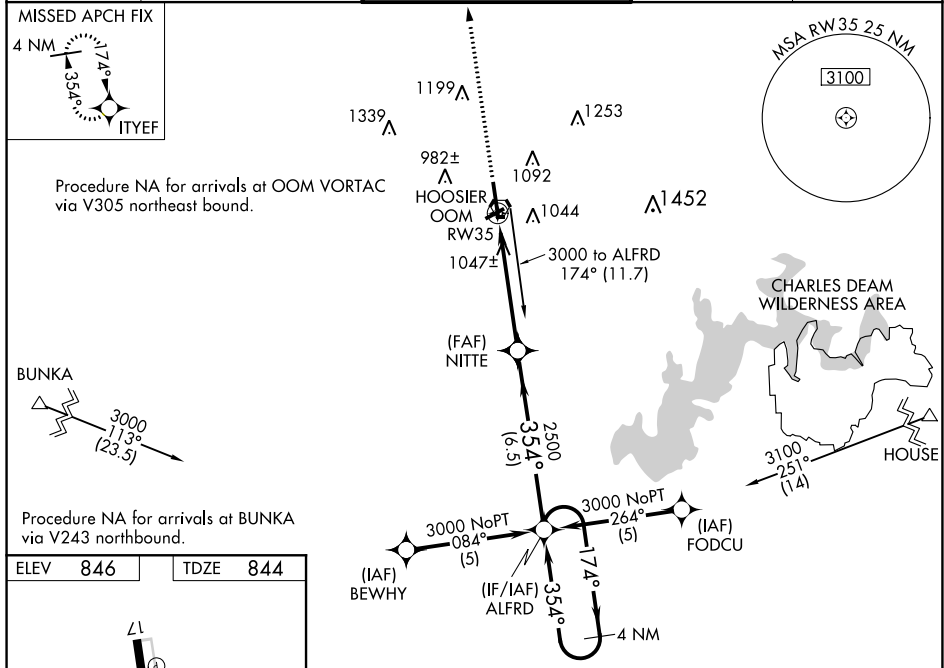

3000 ITYEF		ALFRD			4 NM Holding Pattern		
							
*LNAV only		*1.3 NM to RW35					
							
1.3 NM		3.7 NM		6.5 NM		GP 3.00° TCH 50	
CATEGORY	A		B		C		D
LPV DA			1044-1½		200 (200-½)		
LNAV/ VNAV DA			1344-1¼		500 (500-1¼)		
LNAV MDA	1300-½ 456 (500-½)		1300-¾ 456 (500-¾)		1300-1 456 (500-1)		
CIRCLING	1380-1 534 (600-1)		1400-1 554 (600-1)		1400-½ 554 (600-½)		1400-2 554 (600-2)

KBMG
RNAV (GPS) RWY 35
100K

