

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 07/09/2026	APWS Task ID: 445CAAABEA2F491BA03966C31BF3C47A	APWS Project ID: 60D1D91F7CA646289C0E09999386D9C8
Procedure: RNAV (GPS) RWY 28 AMDT 2		Enroute: NO	Specialist: Swinson, Robert		Agreement Number:
Airport ID: 4J5			Airport City: QUITMAN		State: GA
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: ACTIVE AIRNAV USED FOR K4J5 AIRPORT AND RUNWAYS. PAPI MOVED - PROCEDURE BUILT WITH 4.00/35.0. REMOVED CAT C MINIMUMS. CONTACT CASIMIR TABAKA, AJV-A432, 405-202-7857. QUALITY 23 CHECKED QUALITY 40 CHECKED					

FIPC BASIC FORM						
PROCEDURE: RNAV (GPS) RWY 28 AMDT 2			AIRPORT NAME: QUITMAN BROOKS COUNTY		AIRPORT ID: K4J5	SPECIAL CONTROL NO: AG-03-210-26
FAC ID: K4J528.02		CITY: QUITMAN			ST: GA	ORIG CHART DATE: 07/09/2026
DFL TYPE: PROC/W	THIRD PARTY: ☐ YES	EST. TIME ON SITE: 0.4	REIMB. NUMBER:	PTS TASK ID: 445CAAABEA2F491BA03966C31BF3C47A		
PREFLIGHT NOTES						
REVIEWER:					DATE:	
COMMENTS:					CHECK ONE: ☐ FLT CK REQ ☐ NFCR ☐ REJECT YES NO	
					CPV COMPLETE? X	
PROCEDURE RESULTS						
INSPECTION DATE: 04/30/2026	CREW #: VN586	N #: N77	INSTRUMENT PROCEDURE STATUS: ☒ SAT ☐ SAT W/CHANGES ☐ UNSAT		ARINC CODING: ☒ SAT ☐ SAT/GOLD ☐ UNSAT	
FLIGHT INSPECTOR SIGNATURE: adam k stalvey @ 04/30/2026 13:42			PRINTED NAME: STALVEY, ADAM KEITH			NOTAM INITIATED? ☐ YES ☒ NO
FLIGHT INSPECTOR REMARKS: No coded VDA.						
IN-FLIGHT OBSTACLE REPORT						
OBSTRUCTION ID #:	COORDINATES OR LOCATION:	GNSS ALTITUDE (MSL):	BAROMETRIC ALTITUDE (MSL):	HEIGHT ABOVE GROUND LEVEL:		


WAAS CH 99534 W28A	APP CRS 279°	Rwy Ldg TDZE 185 Apt Elev 185
--	------------------------	---

OLD


RNAV (GPS) RWY 28
QUITMAN BROOKS COUNTY (4J5)

RNP APCH.	MISSED APPROACH: Climb to 2000 direct HOSOG and hold.
Procedure NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA. Use Valdosta altimeter setting; when not received, use Thomasville altimeter setting and increase all MDA 20 feet; increase LP and LNAV Cat C visibility 1/8 SM.	

VALDOSTA APP CON ★ 126.6	CTAF 122.9 0
------------------------------------	------------------------

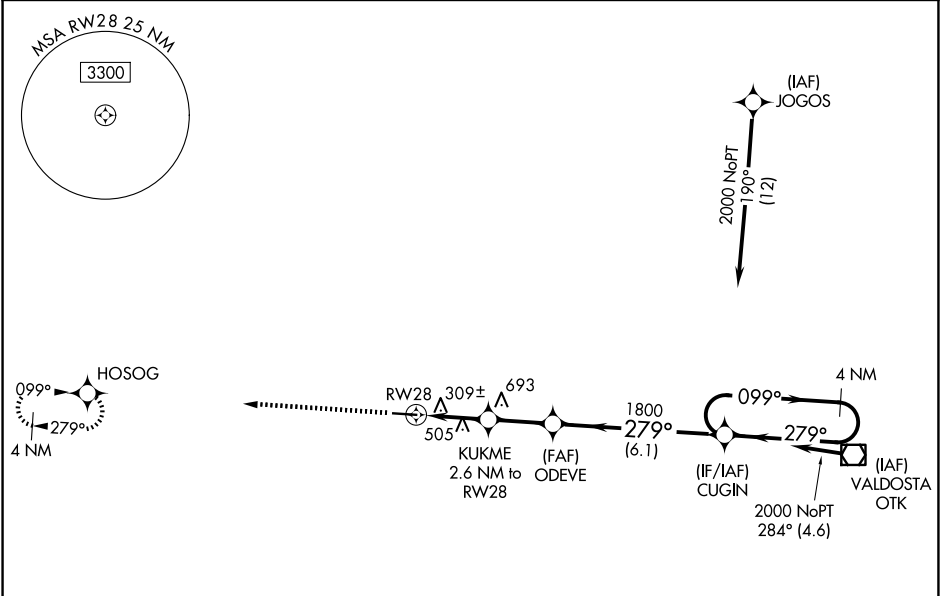

ELEV 185	TDZE 185
----------	----------

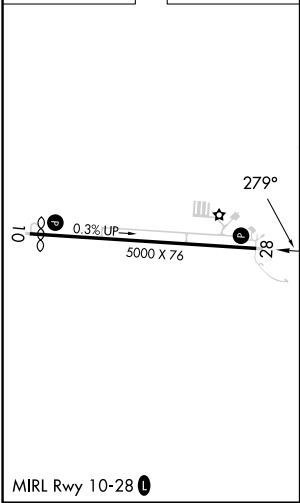

Visual Segment - Obstacles.				
4 NM Holding Pattern				
CUGIN				
ODEVE				
KUKME 2.6 NM to RW28				
RW28				
1060 1800				
2.6 NM 2.3 NM 6.1 NM				
CATEGORY	A	B	C	D
LP MDA	600-1	415 (500-1)	600-1 1/8 415 (500-1 1/8)	NA
LNAV MDA	860-1	675 (700-1)	860-1 7/8 675 (700-1 7/8)	NA

WAAS CH 99534 W28A	APP CRS 279°	Rwy Ldg TDZE 185 Apt Elev 185	5000
--	------------------------	---	-------------

RNAV (GPS) RWY 28

QUITMAN BROOKS COUNTY (4J5)

RNP APCH - GPS.		MISSED APPROACH: Climb to 2000 direct HOSOG and hold.
▼ ⚠ NA Rwy 28 helicopter visibility reduction below 1 SM NA. Procedure NA at night. Use VLD altimeter setting; when not received, use TVI altimeter setting and increase all MDA 20 feet.		
VLD ASOS 126.225	VALDOSTA APP CON★ 126.6	CTAF 122.9 0

