

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 07/11/2024	APWS Task ID: 45B574A180484E5496D9D0ADAEA4091B	APWS Project ID: C0DBF2CEB2724834BC676233B3A787CC
Procedure: VOR RWY 27 AMDT 1		Enroute: NO	Specialist: Schones, Christopher		Agreement Number:
Airport ID: PAOT			Airport City: KOTZEBUE		State: AK
Facility ID: OTZ	Facility Type: VOR_DME	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: ASSIGNED MAG/VAR: OTZ VOR/DME: OLD 11E - NEW 9E ACITVE AIRPORT DATA AND RUNWAYS FOR PAOT USED. PENDING DATA USED FOR OTZ VOR/DME CONTACT: CAS TABAKA 405-954-7931 QUALITY 9 CHECKED BEGUE QUALITY 30 CHECKED					

VOR/DME OTZ	APP CRS	Rwy Idg	5900
115.7	257°	TDZE	15
Chan 104		Apt Elev	15

OLD

VOR RWY 27



RALPH WIEN MEML (OTZ) (PAOT)

DME required.

⚠ Circling to Rwy 18, 36 NA at night. Rwy 27 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 27 at night, Circling Rwy 27 at night, operational VGSI required, remain on or above glidepath until threshold.

MISSED APPROACH: Climb to 1600 then climbing left turn to 2000 direct OTZ VOR/DME and hold, continue climb-in-hold to 2000.

AFIS 135.45	ANCHORAGE CENTER 119.2 263.0	KOTZEBUE RADIO 123.6 (CTAF) 0
----------------	---------------------------------	----------------------------------

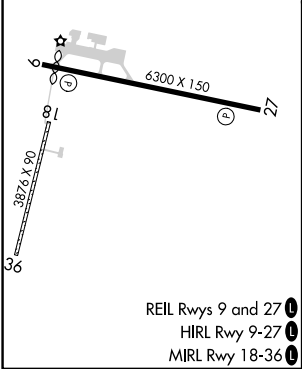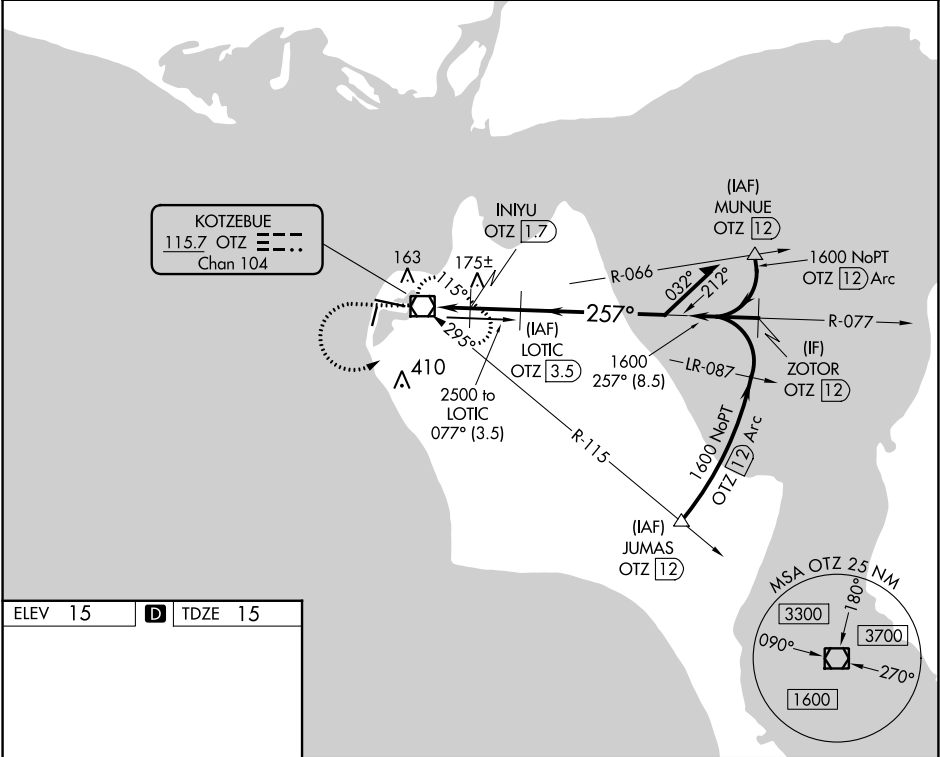

1600	2000	OTZ	LOTIC OTZ 3.5	Remain within 10 NM
↑	↶	⊠	INIYU OTZ 1.7	077°
OTZ VOR/DME		920	1600	257°
0.7		1.7 NM	1.8 NM	
CATEGORY	A	B	C	D
S-27	440-1	425 (500-1)	440-1¼	425 (500-1¼)
⊠ CIRCLING	520-1	505 (600-1)	720-2	720-2¼
			705 (800-2)	705 (800-2¼)

KOTZEBUE, ALASKA

AL-2118 (FAA)

FIG


VOR/DME OTZ 115.7 Chan 104	APP CRS 263°	Rwy Idg TDZE Apt Elev	5900 15 15
--	------------------------	-----------------------------	---------------------------------------

VOR RWY 27


RALPH WIEN MEML (OTZ) (PAOT)

DME required.		MISSED APPROACH: Climb to 1600 then climbing left turn to 2000 direct OTZ VOR/DME and hold, continue climb-in-hold to 2000.
Rwy 27 helicopter visibility reduction below 1 SM NA. Circling to Rwy 18, 36 NA at night. Straight-in Rwy 27 at night, Circling Rwy 27 at night, operational VGSI required, remain on or above glidepath until threshold.		
AFIS 135.45	ANCHORAGE CENTER 119.2 263.0	KOTZEBUE RADIO 123.6 (CTAF) 0

PROTOTYPE-NOT FOR NAVIGATION

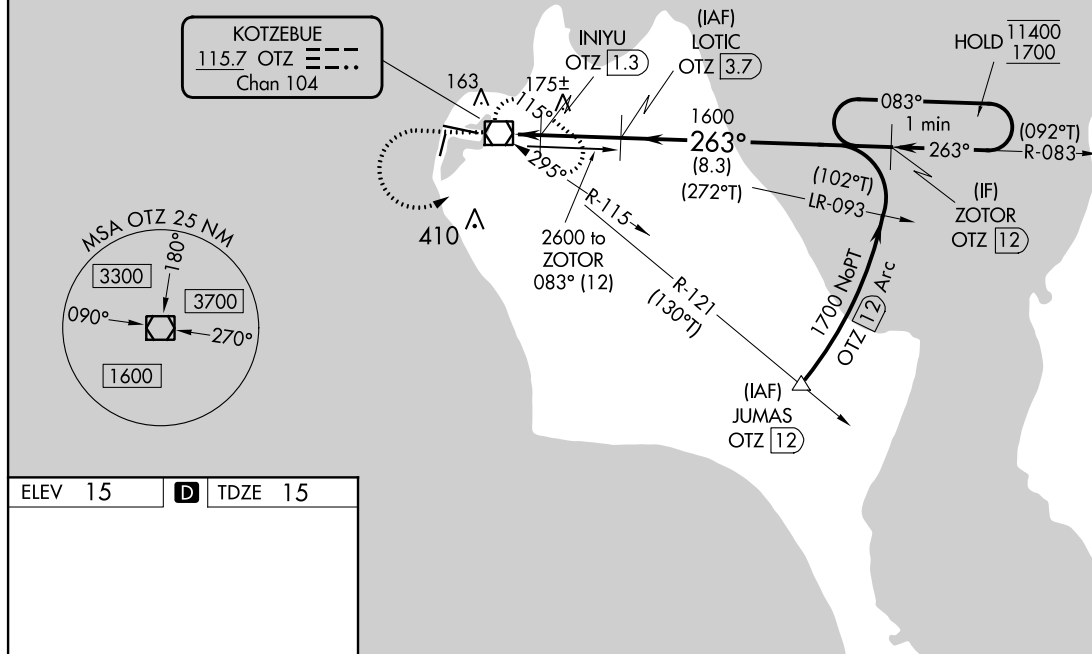

ELEV 15 **D** TDZE 15

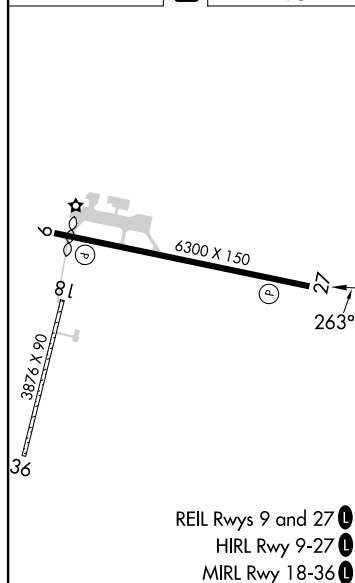

1600	2000	OTZ	One Minute Holding Pattern	
↑		↶	↶	
1600		1600	1600	
0.7		1.3 NM	2.4 NM	8.3 NM
CATEGORY	A	B	C	D
S-27	440-1	425 (500-1)	440-1¼	425 (500-1¼)
CIRCLING	520-1	505 (600-1)	720-2 705 (800-2)	720-2¼ 705 (800-2¼)

KOTZEBUE, ALASKA

Amdt 1 FIG


66°53'N-162°36'W


RALPH WIEN MEML (OTZ) (PAOT)


VOR RWY 27

AUTOMATED AL-2118 VOR RWY 27

AK
03/21/24
COMPILER: JUN
REVIEWER:
DBL CHKR:
EFF: FIG

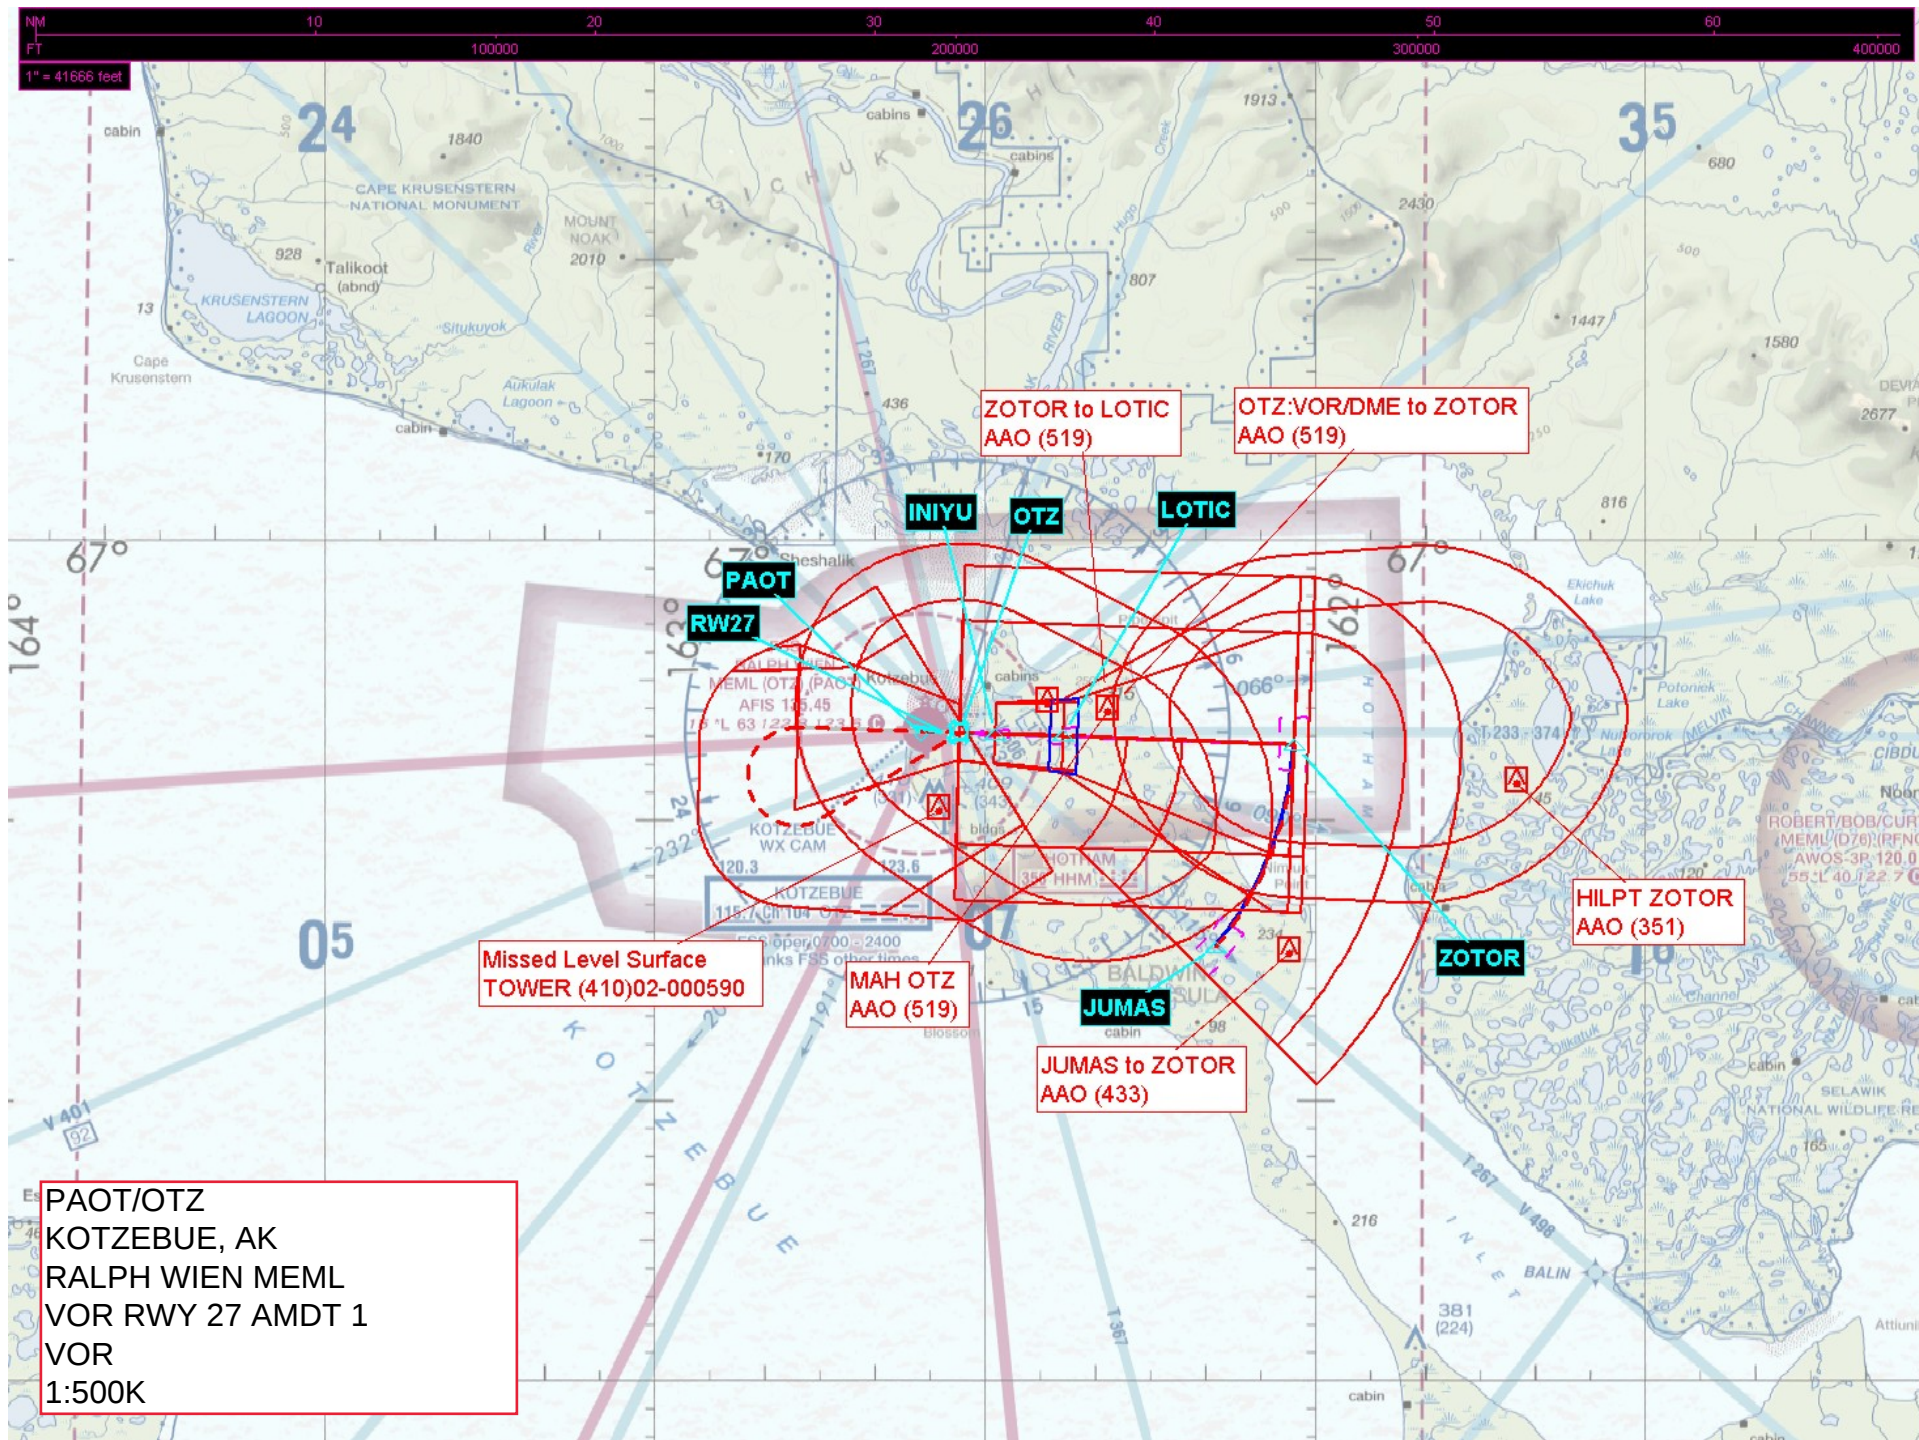

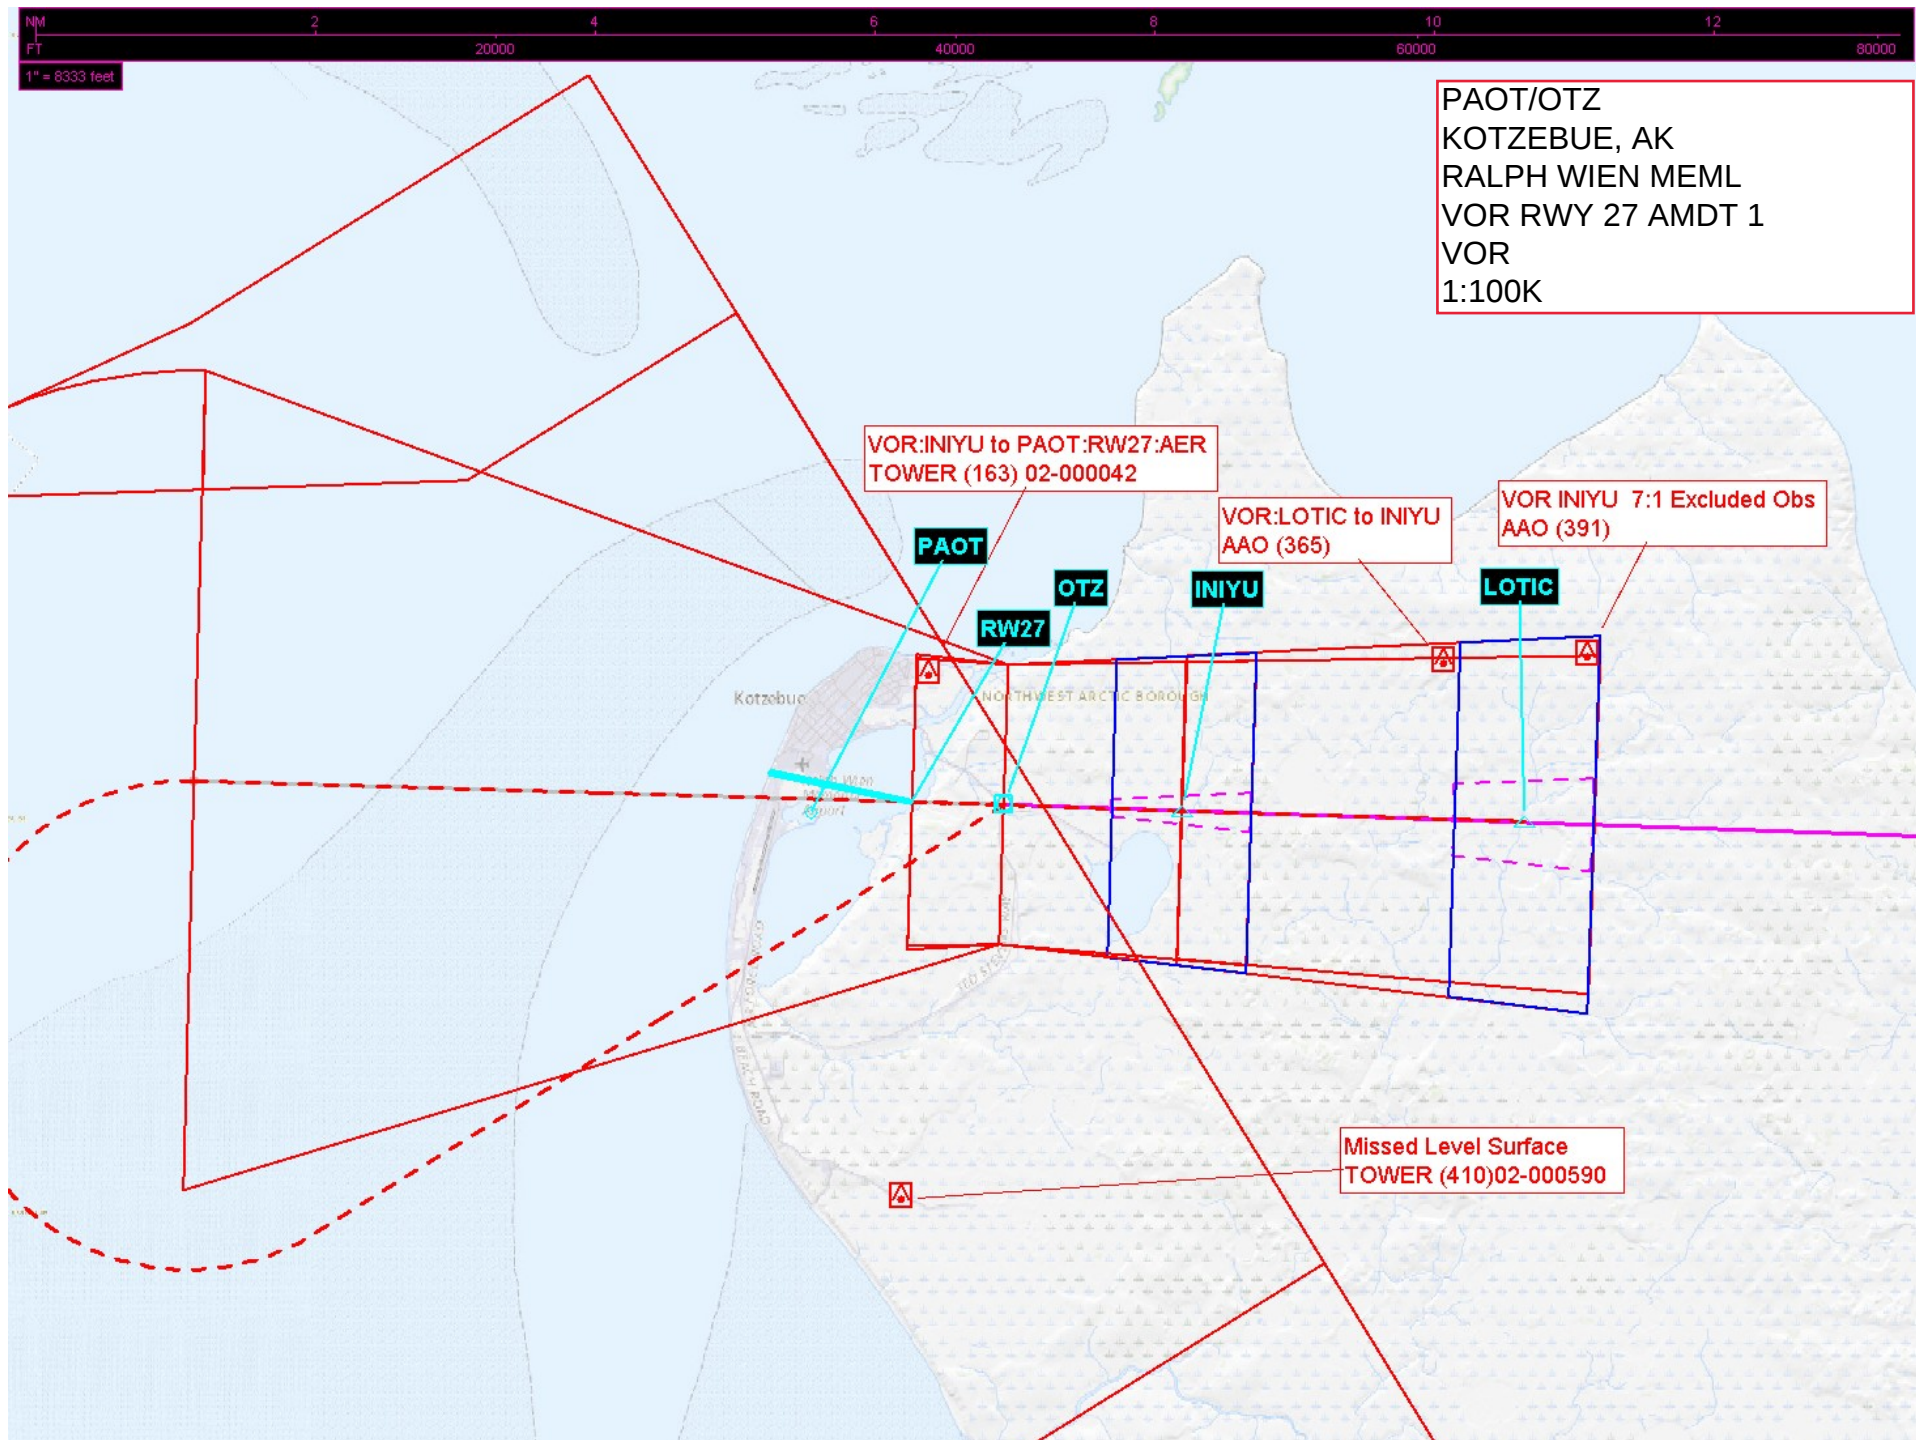



PAOT/OTZ
KOTZEBUE, AK
RALPH WIEN MEML
VOR RWY 27 AMDT 1
CIRCLING
1:100K

