

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 07/09/2026	APWS Task ID: 5C9FB6B95E6B49C8B954B84F570A325A	APWS Project ID: 867FC663DBDE4E23AF8C4A9CA30126B8
Procedure: VOR RWY 27 AMDT 2		Enroute: NO	Specialist: Dugan, Joshua		Agreement Number:
Airport ID: KLUM			Airport City: MENOMONIE		State: WI
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: ACTIVE DATA USED KLUM NEW MISSED APPROACH CONTACT ROBERT HAMILTON AJV-A433 405-954-4608 QUALITY 38 CHECKED QUALITY 8 CHECKED					

FIPC BASIC FORM								
PROCEDURE: VOR RWY 27 AMDT 2			AIRPORT NAME: MENOMONIE MUNI/SCORE FLD		AIRPORT ID: KLUM	SPECIAL CONTROL NO: BP-06-066-26		
FAC ID: EAU		CITY: MENOMONIE			ST: WI	ORIG CHART DATE: 09/03/2026		
DFL TYPE: PROC/A	THIRD PARTY: ☐ YES	EST. TIME ON SITE: 0.4	REIMB. NUMBER:		PTS TASK ID: 5C9FB6B95E6B49C8B954B84F570A325A			
PREFLIGHT NOTES								
REVIEWER: scott wiebe					DATE: 08/24/2026			
COMMENTS:					CHECK ONE: ☒ FLT CK REQ ☐ NFCR ☐ REJECT			
							YES	NO
					CPV COMPLETE?		X	
PROCEDURE RESULTS								
INSPECTION DATE: 08/24/2026		CREW #: VN219	N #: N83	INSTRUMENT PROCEDURE STATUS: ☒ SAT ☐ SAT W/CHANGES ☐ UNSAT		ARINC CODING: ☒ SAT ☐ SAT/GOLD ☐ UNSAT		
FLIGHT INSPECTOR SIGNATURE: scott wiebe @ 08/24/2026 17:11			PRINTED NAME: WIEBE, GREGORY SCOTT				NOTAM INITIATED? ☐ YES ☒ NO	
FLIGHT INSPECTOR REMARKS:								
IN-FLIGHT OBSTACLE REPORT								
OBSTRUCTION ID #:	COORDINATES OR LOCATION:		GNSS ALTITUDE (MSL):		BAROMETRIC ALTITUDE (MSL):		HEIGHT ABOVE GROUND LEVEL:	

OLD

MENOMONIE, WISCONSIN

AL-9006 (FAA)

25275



VORTAC EAU 113.65 Chan 83 (Y)	APP CRS 265°	Rwy Ldg 5074 TDZE 894 Apt Elev 895
---	------------------------	---

VOR/DME RWY 27
MENOMONIE MUNI/SCORE FLD (LUM)

⚠ When local altimeter setting not received, use Chippewa Valley Rgnl altimeter setting and increase all MDA 60 feet, increase Circling Cat B and C visibility ¼ SM. VDP NA when using Chippewa Valley Rgnl altimeter setting. Rwy 27 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 then climbing right turn to 2800 direct EAU VORTAC and hold.

AWOS-3PT 118.025	MINNEAPOLIS CENTER 125.3 335.6	UNICOM 123.075 (CTAF) 0
----------------------------	--	--

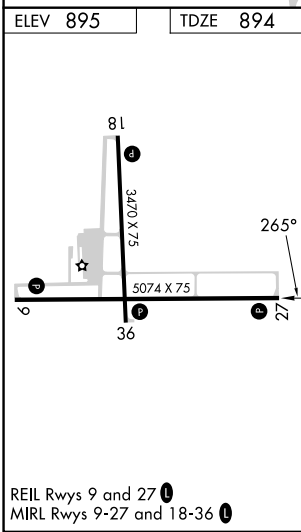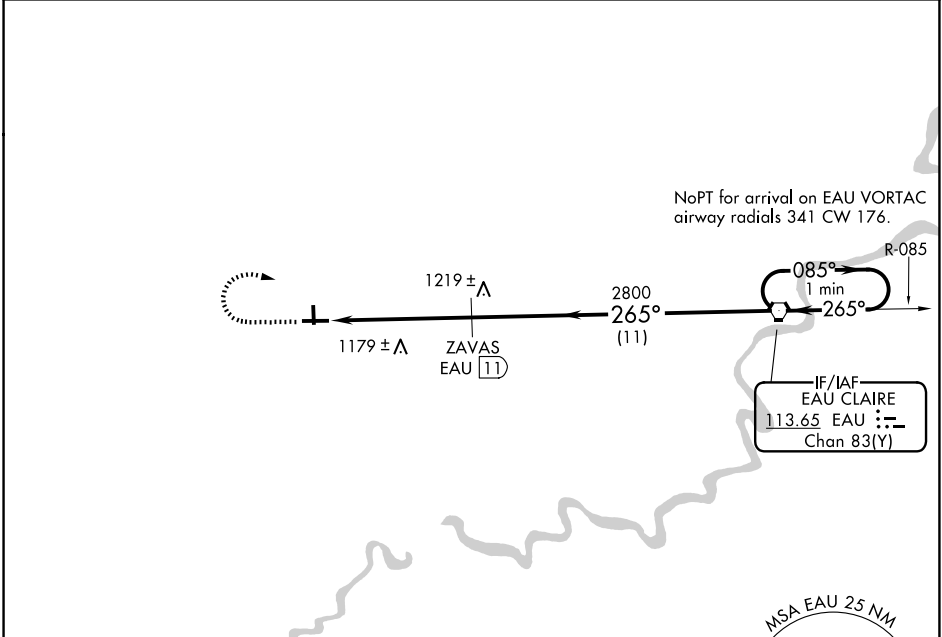

2000	2800	EAU	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 40).	One Minute Holding Pattern
CATEGORY	A	B	C	D
S-27	1560-1	666 (700-1)	1560-1¾ 666 (700-1¾)	NA
CIRCLING	1560-1 665 (700-1)	1800-1¼ 905 (1000-1¼)	1820-2¾ 925 (1000-2¾)	NA

MENOMONIE, WISCONSIN
Amdt 1B 09SEP21

44°54'N-91°52'W

MENOMONIE MUNI/SCORE FLD (LUM)
VOR/DME RWY 27

EC-3, 25 DEC 2025 to 22 JAN 2026

EC-3, 25 DEC 2025 to 22 JAN 2026