

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 06/12/2025	APWS Task ID: 77A3EB4258094F7386BEB3ADC935F4B7	APWS Project ID: 77184CD95E5A41A49F62E242800CB5C5
Procedure: RNAV (GPS) RWY 13 AMDT 0B		Enroute: NO	Specialist: Bristow, Travis		Agreement Number:
Airport ID: KMHE			Airport City: MITCHELL		State: SD
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: ACTIVE AIRPORT AND RUNWAY DATA USED. CLEARs T-NOTAM FDC: 4/6716 MHE IAP MITCHELL MUNI, MITCHELL, SD. RNAV (GPS) RWY 13, ORIG-A... LNAV MDA 1660/HAT 359. 2308281906-2404081906EST. CONTACT DAVID DANNER, AJV-A421, 405-905-5077. 09/26/25: THIS IS A CORRECTED COPY OF THE FORM APPROVED ON 09/23/25. 1. REMOVED FO FROM CA LEG IN TERMINAL ROUTES. 2. CHANGED FAS OBST TO CHART FAS OBST IN ADDITIONAL FLIGHT DATA. QUALITY 34 CHECKED QUALITY 41 CHECKED QUALITY 41 CHECKED QUALITY 13 CHECKED					

FIPC BASIC FORM						
PROCEDURE: RNAV (GPS) RWY 13 AMDT 0B			AIRPORT NAME: MITCHELL MUNI		AIRPORT ID: KMHE	SPECIAL CONTROL NO: BG-03-283-25
FAC ID: KMHE13		CITY: MITCHELL			ST: SD	ORIG CHART DATE: 06/12/2025
DFL TYPE: PROC/S	THIRD PARTY: ☐ YES	EST. TIME ON SITE: 0.4	REIMB. NUMBER:	PTS TASK ID: 77A3EB4258094F7386BEB3ADC935F4B7		
PREFLIGHT NOTES						
REVIEWER: susanna roberts					DATE: 09/18/2025	
COMMENTS:					CHECK ONE:	
					☐ FLT CK REQ ☒ NFCR ☐ REJECT	
						YES
					CPV COMPLETE?	
					X	
PROCEDURE RESULTS						
INSPECTION DATE: 09/18/2025	CREW #: VN415	N #: N90	INSTRUMENT PROCEDURE STATUS: ☒ SAT ☐ SAT W/CHANGES ☐ UNSAT		ARINC CODING: ☒ SAT ☐ SAT/GOLD ☐ UNSAT	
FLIGHT INSPECTOR SIGNATURE: susanna roberts @ 09/18/2025 14:23			PRINTED NAME: ROBERTS, SUSANNA TALLEY			NOTAM INITIATED? ☐ YES ☒ NO
FLIGHT INSPECTOR REMARKS:						
IN-FLIGHT OBSTACLE REPORT						
OBSTRUCTION ID #:	COORDINATES OR LOCATION:	GNSS ALTITUDE (MSL):	BAROMETRIC ALTITUDE (MSL):	HEIGHT ABOVE GROUND LEVEL:		

WAAS CH 77900 W13A	APP CRS 130°	Rwy Idg TDZE Apt Elev	6701 1301 1304
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

MITCHELL MUNI (MHE)


RNP APCH - GPS.

⚠

Baro-VNAV and VDP NA when using HON altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use HON altimeter setting and increase and increase LPV DA to 1664 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1776 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 3200 direct JUTUB and hold.

ASOS 124.175	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF)
------------------------	---	-------------------------------

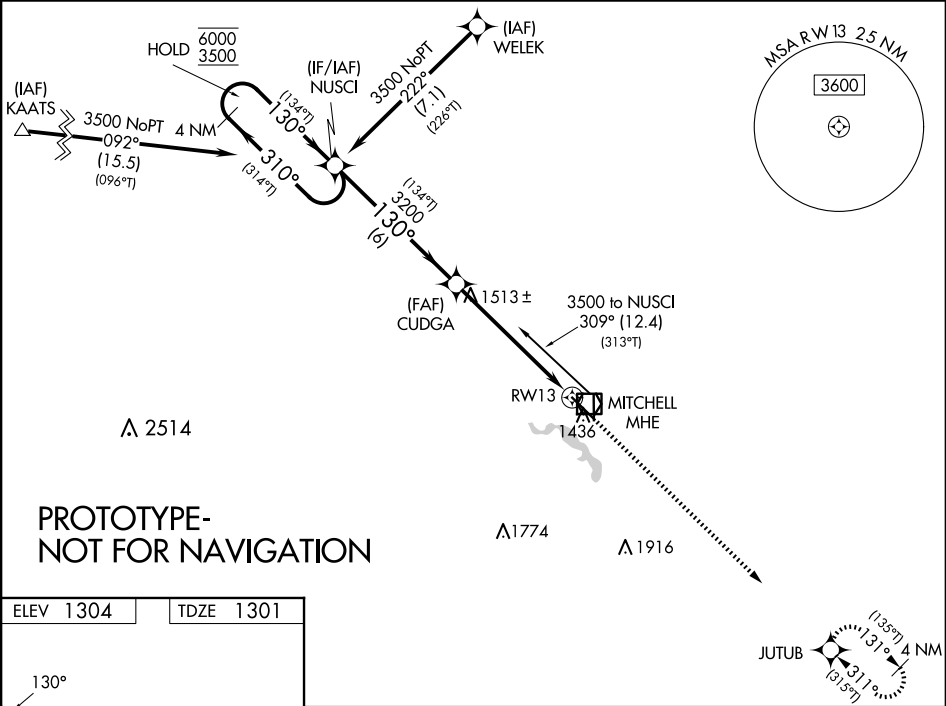

ELEV 1304 TDZE 1301

HIRL Rwy 13-31
MIRL Rwy 18-36
REIL RWYS 13 and 18

4 NM Holding Pattern (314°T)		NUSCI		JUTUB	
6000 3500		310° 130°		3200	
GP 3.00° TCH 46		CUDGA		RWY 13	
		6 NM		4.4 NM	
CATEGORY	A	B	C	D	
LPV DA	1575-1		274 (300-1)		
LNAV/VNAV DA	1687-1¼		386 (400-1¼)		
LNAV MDA	1780-1	479 (500-1)	1780-1⅔	479 (500-1⅔)	
CIRCLING	1780-1¼	476 (500-1¼)	1820-1½ 516 (600-1½)	1860-2 576 (600-2)	

WAAS CH 77900 W13A	APP CRS 130°	Rwy Idg TDZE 1301 Apt Elev 1304
--	------------------------	---

OLD



RNAV (GPS) RWY 13
MITCHELL MUNI (MHE)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA with Huron Rgnl altimeter setting.

⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Huron Rgnl altimeter setting and increase all DA 89 feet and all MDA 100 feet. Increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅓ mile and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3200 direct JUTUB and hold.

ASOS 124.175	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF)
------------------------	---	-------------------------------

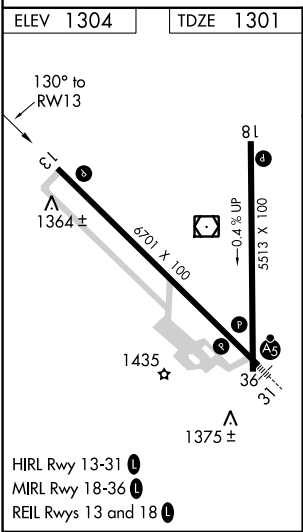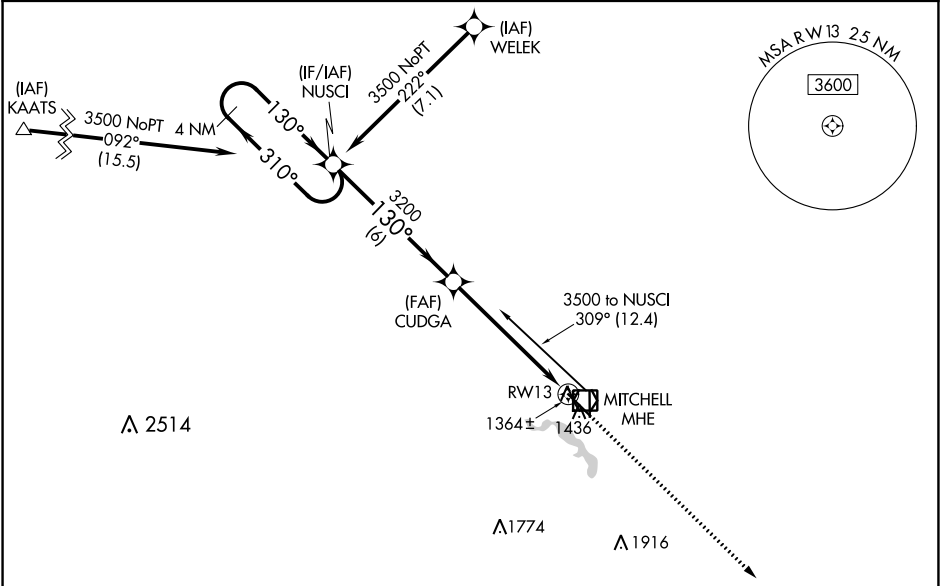


4 NM Holding Pattern				3200	JUTUB
GP 3.00° TCH 46				* 0.9 NM to RWY13	* LNAV only
CATEGORY	A	B	C	D	
LPV DA	1575-1		274 (300-1)		
LNAV/VNAV DA	1627-1¼		326 (400-1¼)		
LNAV MDA	1620-1		319 (400-1)		
CIRCLING	1740-1¼ 436 (500-1¼)	1760-1¼ 456 (500-1¼)	1820-1½ 516 (600-1½)	1860-2 556 (600-2)	


NC-1, 28 NOV 2024 to 26 DEC 2024

NC-1, 28 NOV 2024 to 26 DEC 2024





KMHE
MITCHELL MUNI
MITCHELL, SD
RNAV (GPS) RWY 13 AMDT 0B
LPV FINAL & MISSED
1:000,000

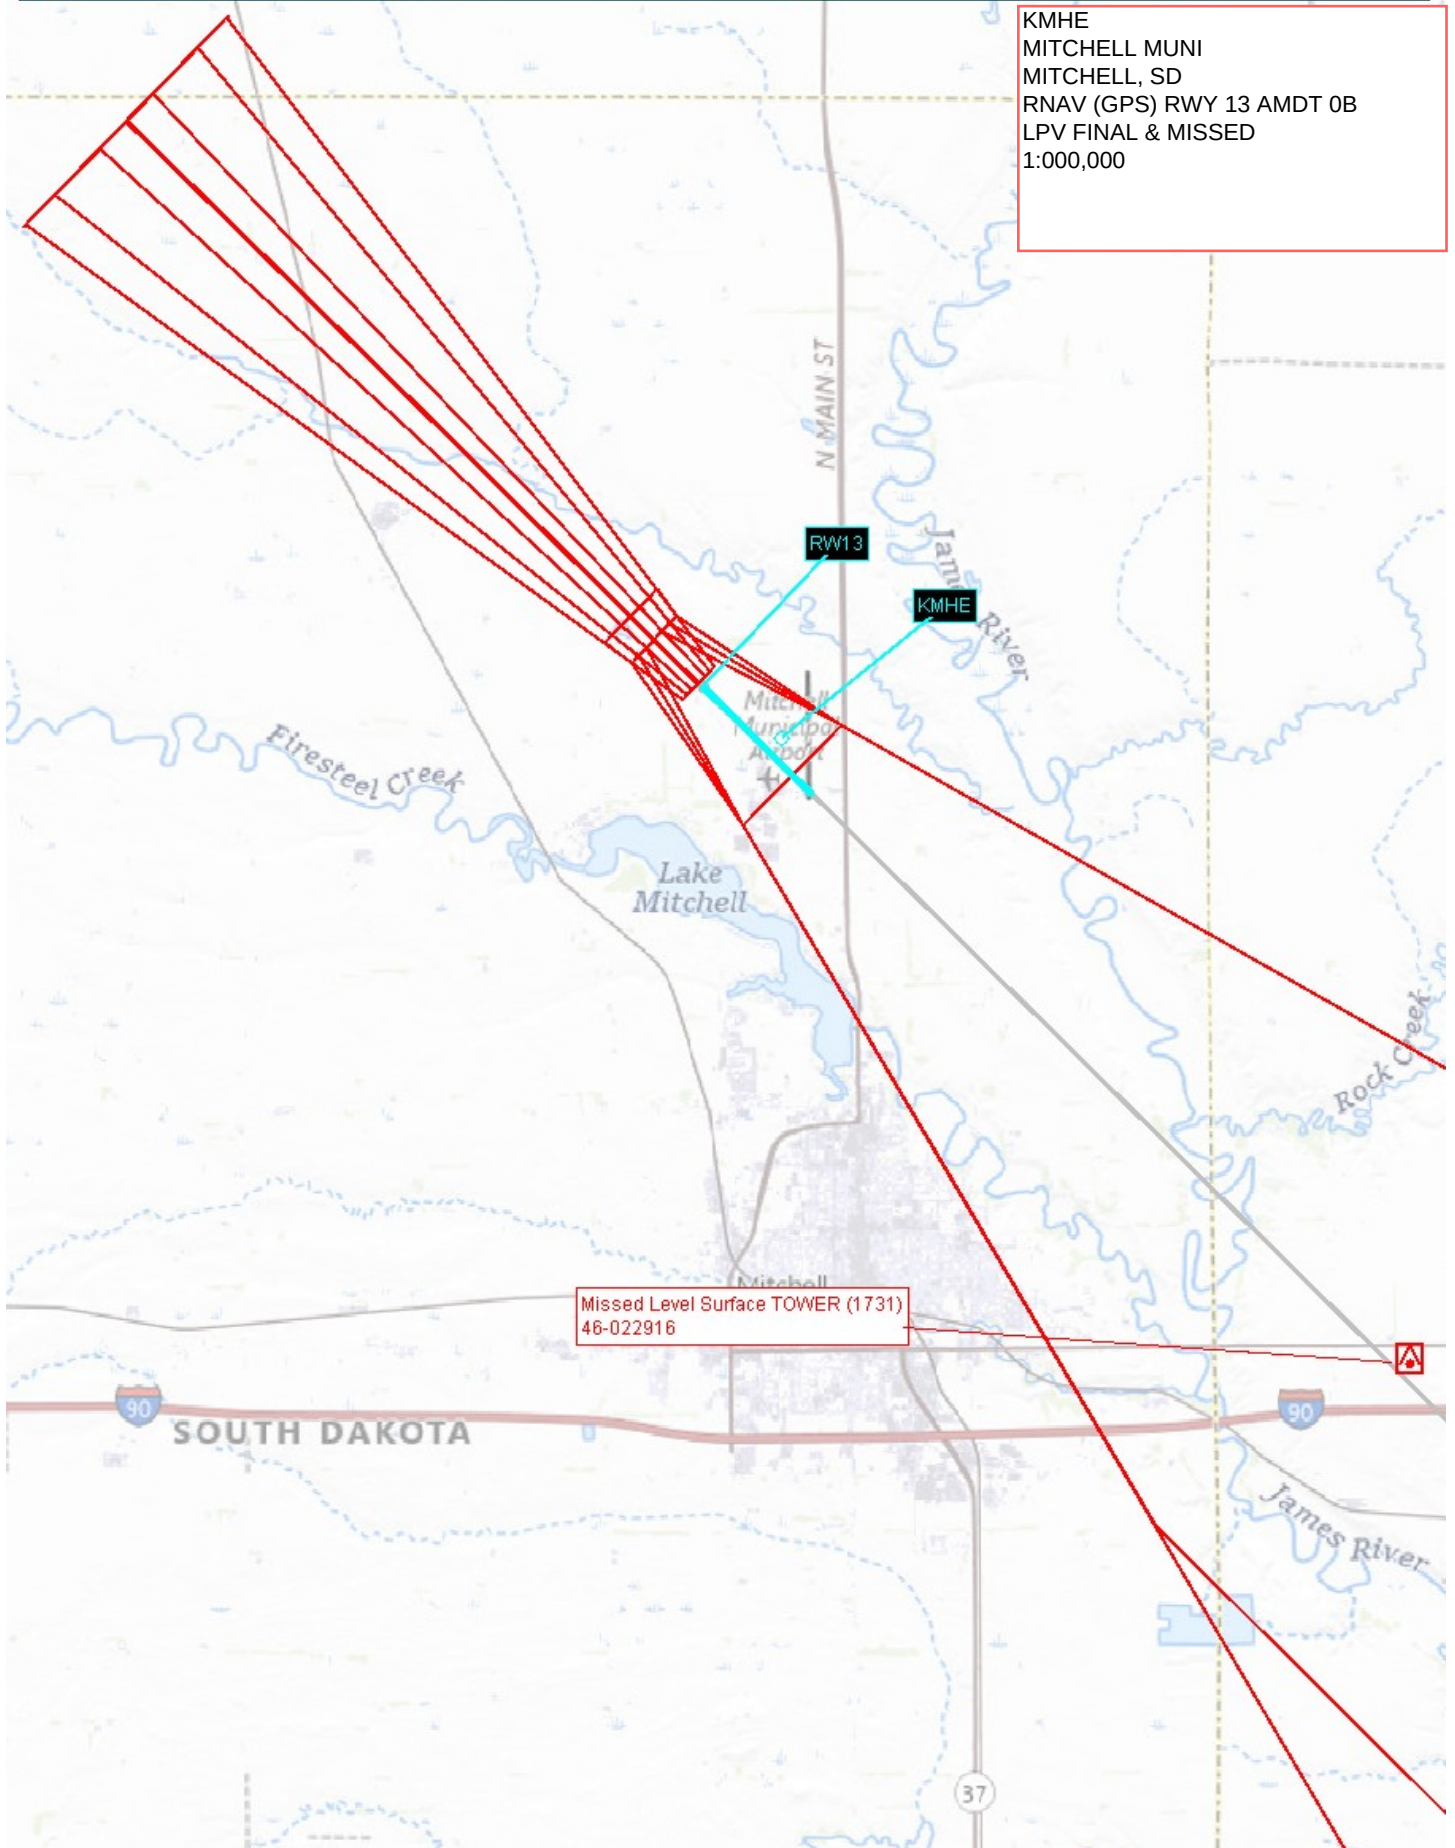



KMHE
MITCHELL MUNI
MITCHELL, SD
RNAV (GPS) RWY 13 AMDT 0B
LNAV/VNAV FINAL & MISSED
1:110,000

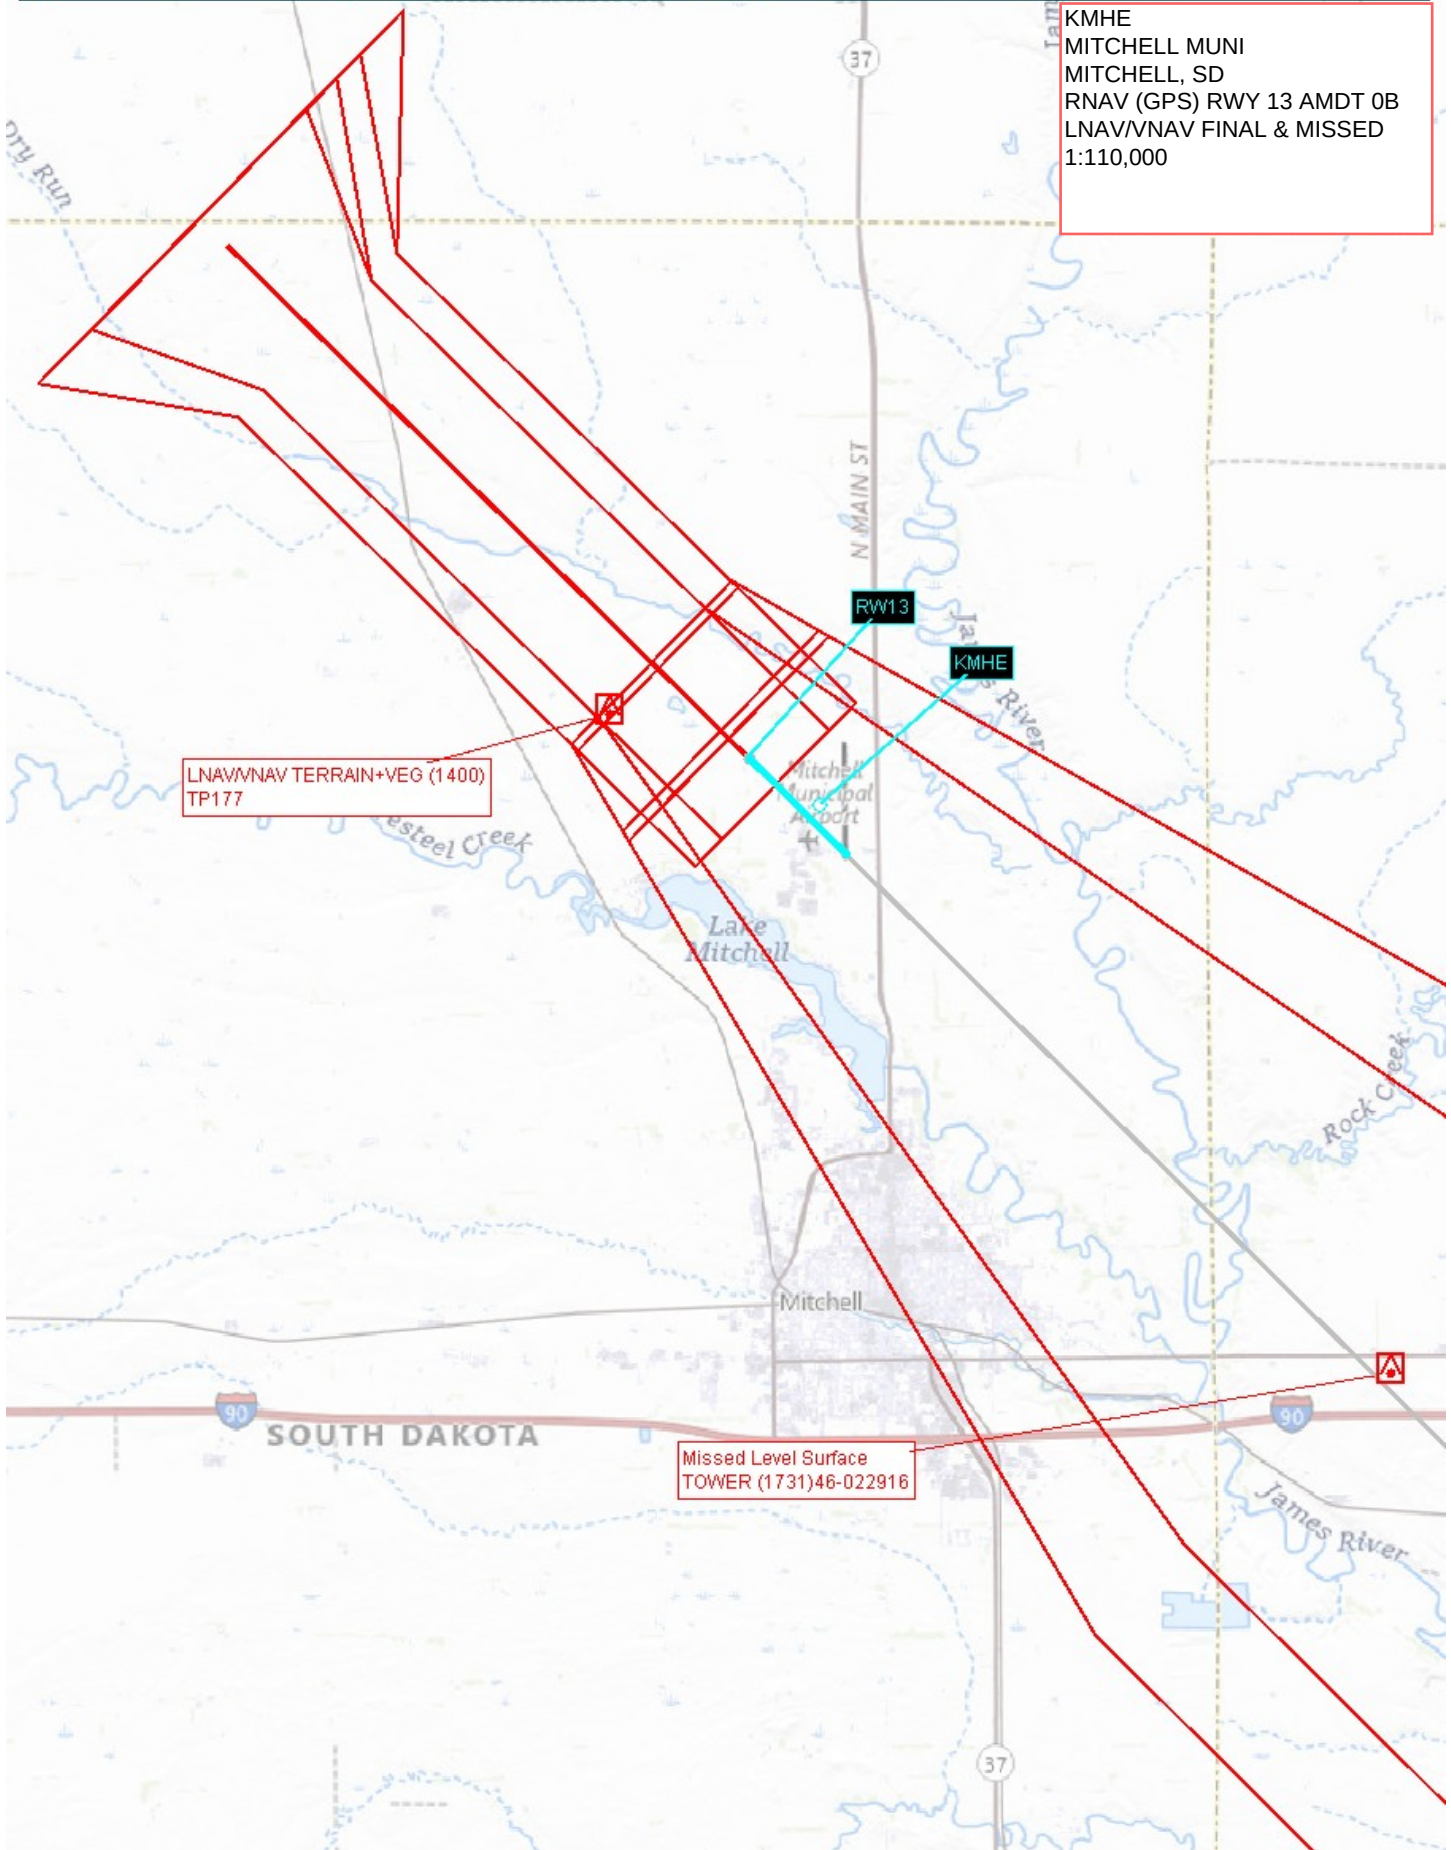



KMHE
MITCHELL MUNI
MITCHELL, SD
RNAV (GPS) RWY 13 AMDT 0B
LNAV FINAL & MISSED
1:110,000

LNAV CUDGA to KMHE:RWY13:AER
TERRAIN+AAO (1513)

LNAV KMHE:RWY13:AER 7:1 Excluded Obs
TERRAIN+AAO (1519)

