

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 02/20/2025	APWS Task ID: 8415D9A429194A8CBBE46C50C4964089	APWS Project ID: 25DEB0295E7F46C4B98B92FD0D838752
Procedure: RNAV (GPS) RWY 2 AMDT 2		Enroute: NO	Specialist: Prassada, Parnell		Agreement Number:
Airport ID: KSUZ			Airport City: BENTON		State: AR
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: ACTIVE AIRPORT DATA USED. LIT VORTAC RELOCATED 8.05 NM NNE FROM ORIGINAL LOCATION. MISSED APPROACH PROCEDURE RESTRUCTURED DUE TO LIT VORTAC RELOCATION; MISSED APPROACH FIX PARON REPLACED BY ROLAN. FEEDER FIX HERID REMOVED DUE TO LIT VORTAC RELOCATION. CONTACT ERIC SUSKI: AJV-A431, 405-954-7331 10/03/25: THIS IS A CORRECTED COPY OF THE FORM APPROVED ON 11/29/24. 1. REMOVED "CHART CIRCLING ICON" FROM ADDITIONAL FLIGHT DATA. QUALITY 34 CHECKED QUALITY 9 CHECKED BEGUE QUALITY 19 CHECKED					

FIPC BASIC FORM								
PROCEDURE: RNAV (GPS) RWY 2 AMDT 2			AIRPORT NAME: SALINE COUNTY RGNL		AIRPORT ID: KSUZ	SPECIAL CONTROL NO: OG-09-007-24		
FAC ID: KSUZ02.02		CITY: BENTON			ST: AR	ORIG CHART DATE: 02/20/2025		
DFL TYPE: PROC/S	THIRD PARTY: ☐ YES	EST. TIME ON SITE: 0.4	REIMB. NUMBER:		PTS TASK ID: 8415D9A429194A8CBBE46C50C4964089			
PREFLIGHT NOTES								
REVIEWER:					DATE:			
COMMENTS:					CHECK ONE: ☐ FLT CK REQ ☐ NFCR ☐ REJECT			
							YES	NO
					CPV COMPLETE?		X	
PROCEDURE RESULTS								
INSPECTION DATE: 10/02/2024		CREW #: VN583	N #: N67	INSTRUMENT PROCEDURE STATUS: ☒ SAT ☐ SAT W/CHANGES ☐ UNSAT		ARINC CODING: ☒ SAT ☐ SAT/GOLD ☐ UNSAT		
FLIGHT INSPECTOR SIGNATURE: hannah wiesneski @ 10/02/2024 17:59			PRINTED NAME: WIESNESKI, HANNAH MARION				NOTAM INITIATED? ☐ YES ☒ NO	
FLIGHT INSPECTOR REMARKS:								
IN-FLIGHT OBSTACLE REPORT								
OBSTRUCTION ID #:	COORDINATES OR LOCATION:		GNSS ALTITUDE (MSL):	BAROMETRIC ALTITUDE (MSL):		HEIGHT ABOVE GROUND LEVEL:		

BENTON, ARKANSAS

AL-10336 (FAA)


FIG

WAAS CH 58209 W02A	APP CRS 019°	Rwy Idg TDZE Apt Elev	5002 389 389
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 2
SALINE COUNTY RGNL (SUZ)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3500 direct NIKIC and track 360° to ROLAN and hold.
▼ Rwy 2 helicopter visibility reduction below ¾ SM NA.	
▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.	

AWOS-3 132.125	LITTLE ROCK APP CON 119.5 306.2	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

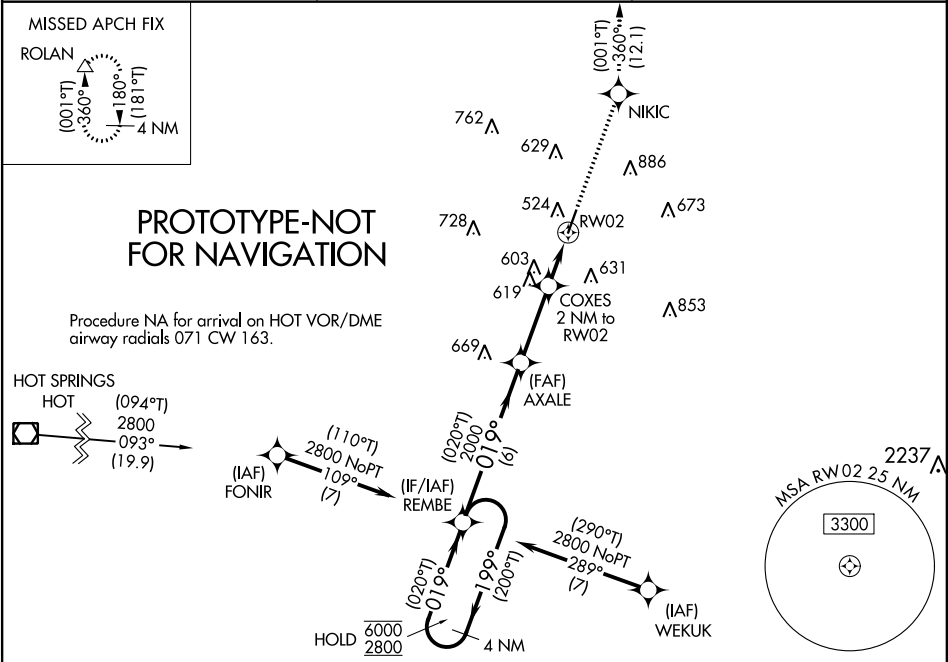

4 NM VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 56).				ELEV 389	TDZE 389
Holding Pattern (200°T) REMBE				3500 ↑	NIKIC ✦
6000 ← 199° 2800 ← 019° (020°T)				tr 360°	ROLAN △
GP 3.00° TCH 45				AXALE 2000	COXES 2 NM to RW02
				2000	1.2 NM to RW02
				1080	RW02
				6 NM	2.9 NM
				0.9	1.2 NM
CATEGORY	A	B	C	D	
LPV DA	639-¾ 250 (300-¾)				
LNAV/ VNAV DA	680-⅞ 291 (300-⅞)				
LNAV MDA	820-1	431 (500-1)	820-1¼	431 (500-1¼)	
CIRCLING	980-1 591 (600-1)	1080-1 691 (700-1)	1200-2½ 811 (900-2½)	1200-2¾ 811 (900-2¾)	

Diagram of RWY 2 showing 5002 x 100 ft. The diagram includes a 199° heading, a 019° heading, and a 020°T heading. It also shows a 3500 ft elevation, a 360° turn, and a 3.00° glide path. The diagram is labeled with 'AXALE 2000', 'COXES 2 NM to RW02', '1.2 NM to RW02', and 'RW02'. The diagram also shows a 6 NM distance, a 2.9 NM distance, a 0.9 NM distance, and a 1.2 NM distance. The diagram is labeled with 'MIRL Rwy 2-20' and 'REIL Rwy 2 and 20'.

BENTON, ARKANSAS

Amnd 2 FIG

34°35'N-092°29'W

RNAV (GPS) RWY 2
SALINE COUNTY RGNL (SUZ)

BENTON, ARKANSAS

AL-10336 (FAA)



22195

WAAS CH 58209 W02A	APP CRS 019°	Rwy Idg TDZE 389 Apt Elev 389
--	------------------------	---

RNAV (GPS) RWY 2
SALINE COUNTY RGNL (SUZ)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2600 direct NIKIC and track 290° to PARON and hold.
▼ Rwy 2 helicopter visibility reduction below ¾ SM NA. ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.	

AWOS-3 132.125	LITTLE ROCK APP CON 119.5 306.2	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

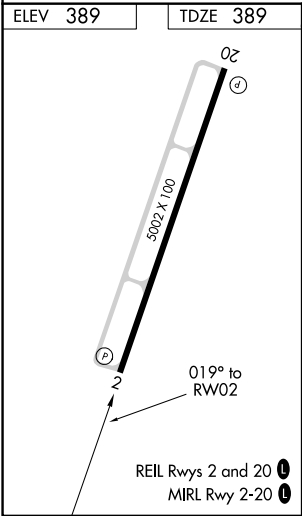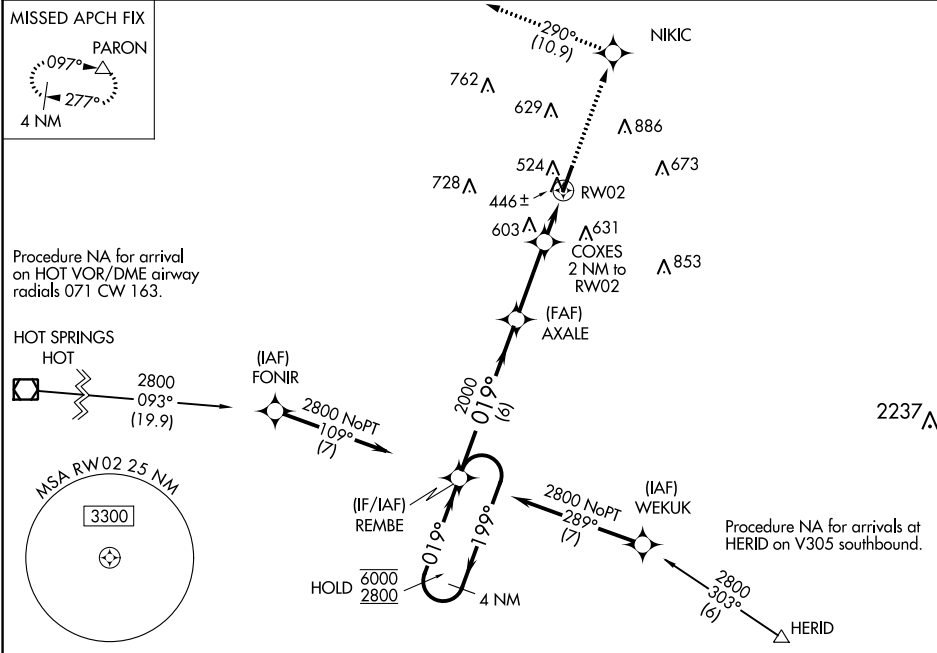

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 56).				2600	NIKIC	PARON
4 NM Holding Pattern REMBE				↑	290° tr	△
6000 ← 199° 2800 019° → 019° 2000 1060				COXES 2 NM to RW02 1.2 NM to RW02		
GP 3.00° TCH 45				RW02		
6 NM 3 NM 0.8 1.2 NM						
CATEGORY	A	B	C	D		
LPV DA	639-¾			250 (300-¾)		
LNAV/VNAV DA	670-⅞			281 (300-⅞)		
LNAV MDA	820-1 431 (500-1)		820-1¼ 431 (500-1¼)			
Ⓢ CIRCLING	940-1 551 (600-1)	1080-1 691 (700-1)	1200-2½ 811 (900-2½)	1200-2¾ 811 (900-2¾)		

BENTON, ARKANSAS

Amdt 1 14JUL22

34°35'N-092°29'W


SALINE COUNTY RGNL (SUZ)

RNAV (GPS) RWY 2

SC-1, 18 APR 2024 to 16 MAY 2024

SC-1, 18 APR 2024 to 16 MAY 2024

SALINE COUNTY RGRL (KSUZ), BENTON AR
RNAV (GPS) RWY 2, AMDT 2
FEEDER, INTERMEDIATE, LPV, MISSED
1:500,000

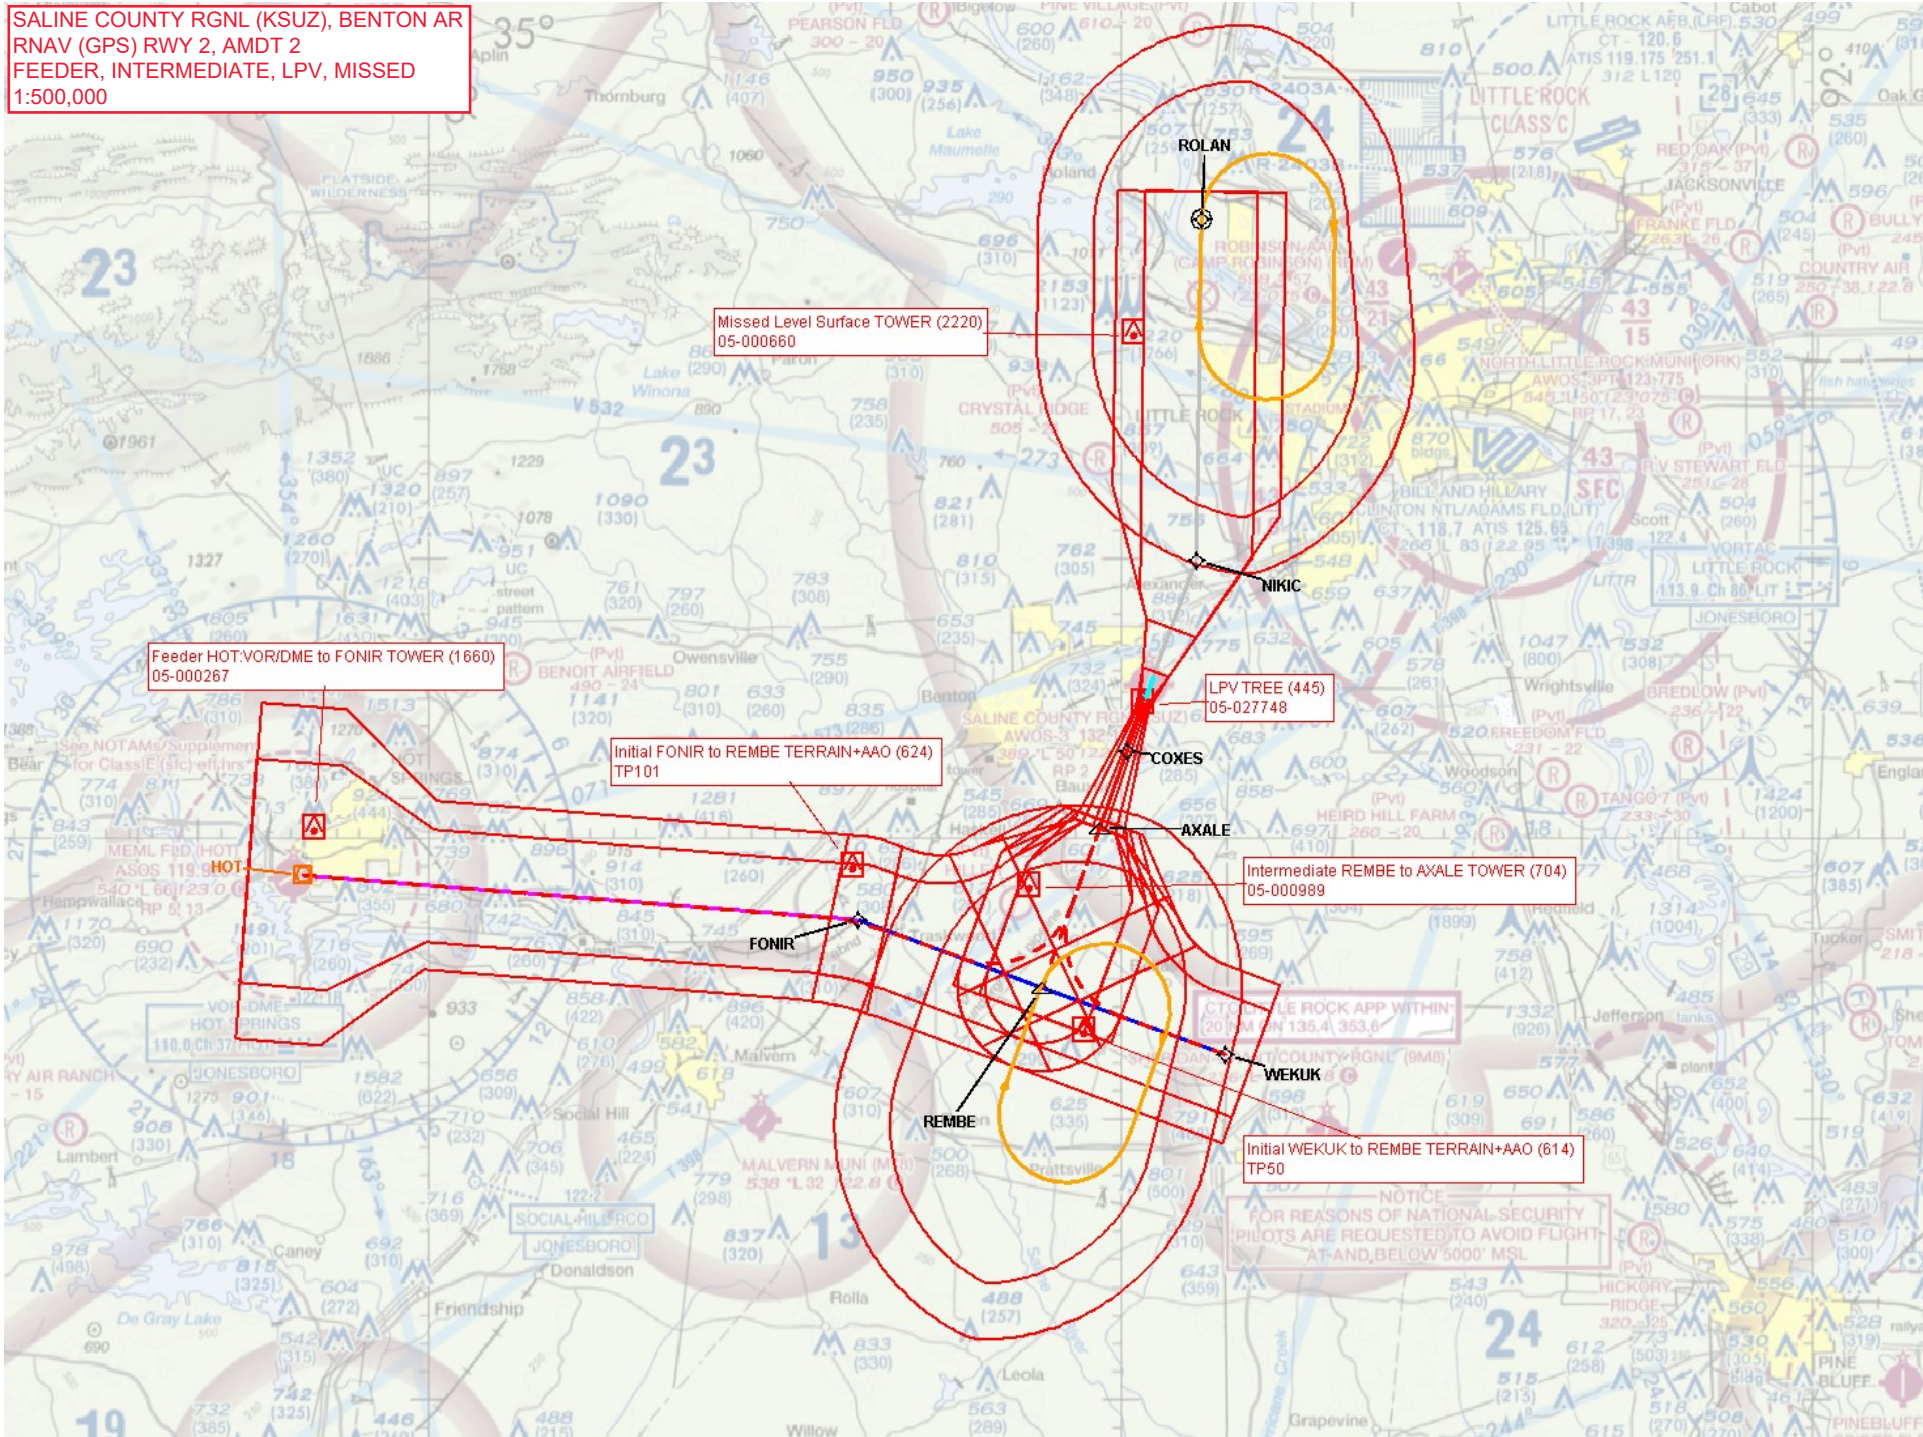


SALINE COUNTY RGNL (KSUZ), BENTON AR
RNAV (GPS) RWY 2, AMDT 2
INTERMEDIATE
1:100,000


Intermediate REMBE to AXALE TOWER (704)
05-000989

AXALE


WEKUK

SALINE COUNTY RGNL (KSUZ), BENTON AR
RNAV (GPS) RWY 2, AMDT 2
LPV, LEVEL MISSED, MISSED HOLD (200 KTS)
1:500,000

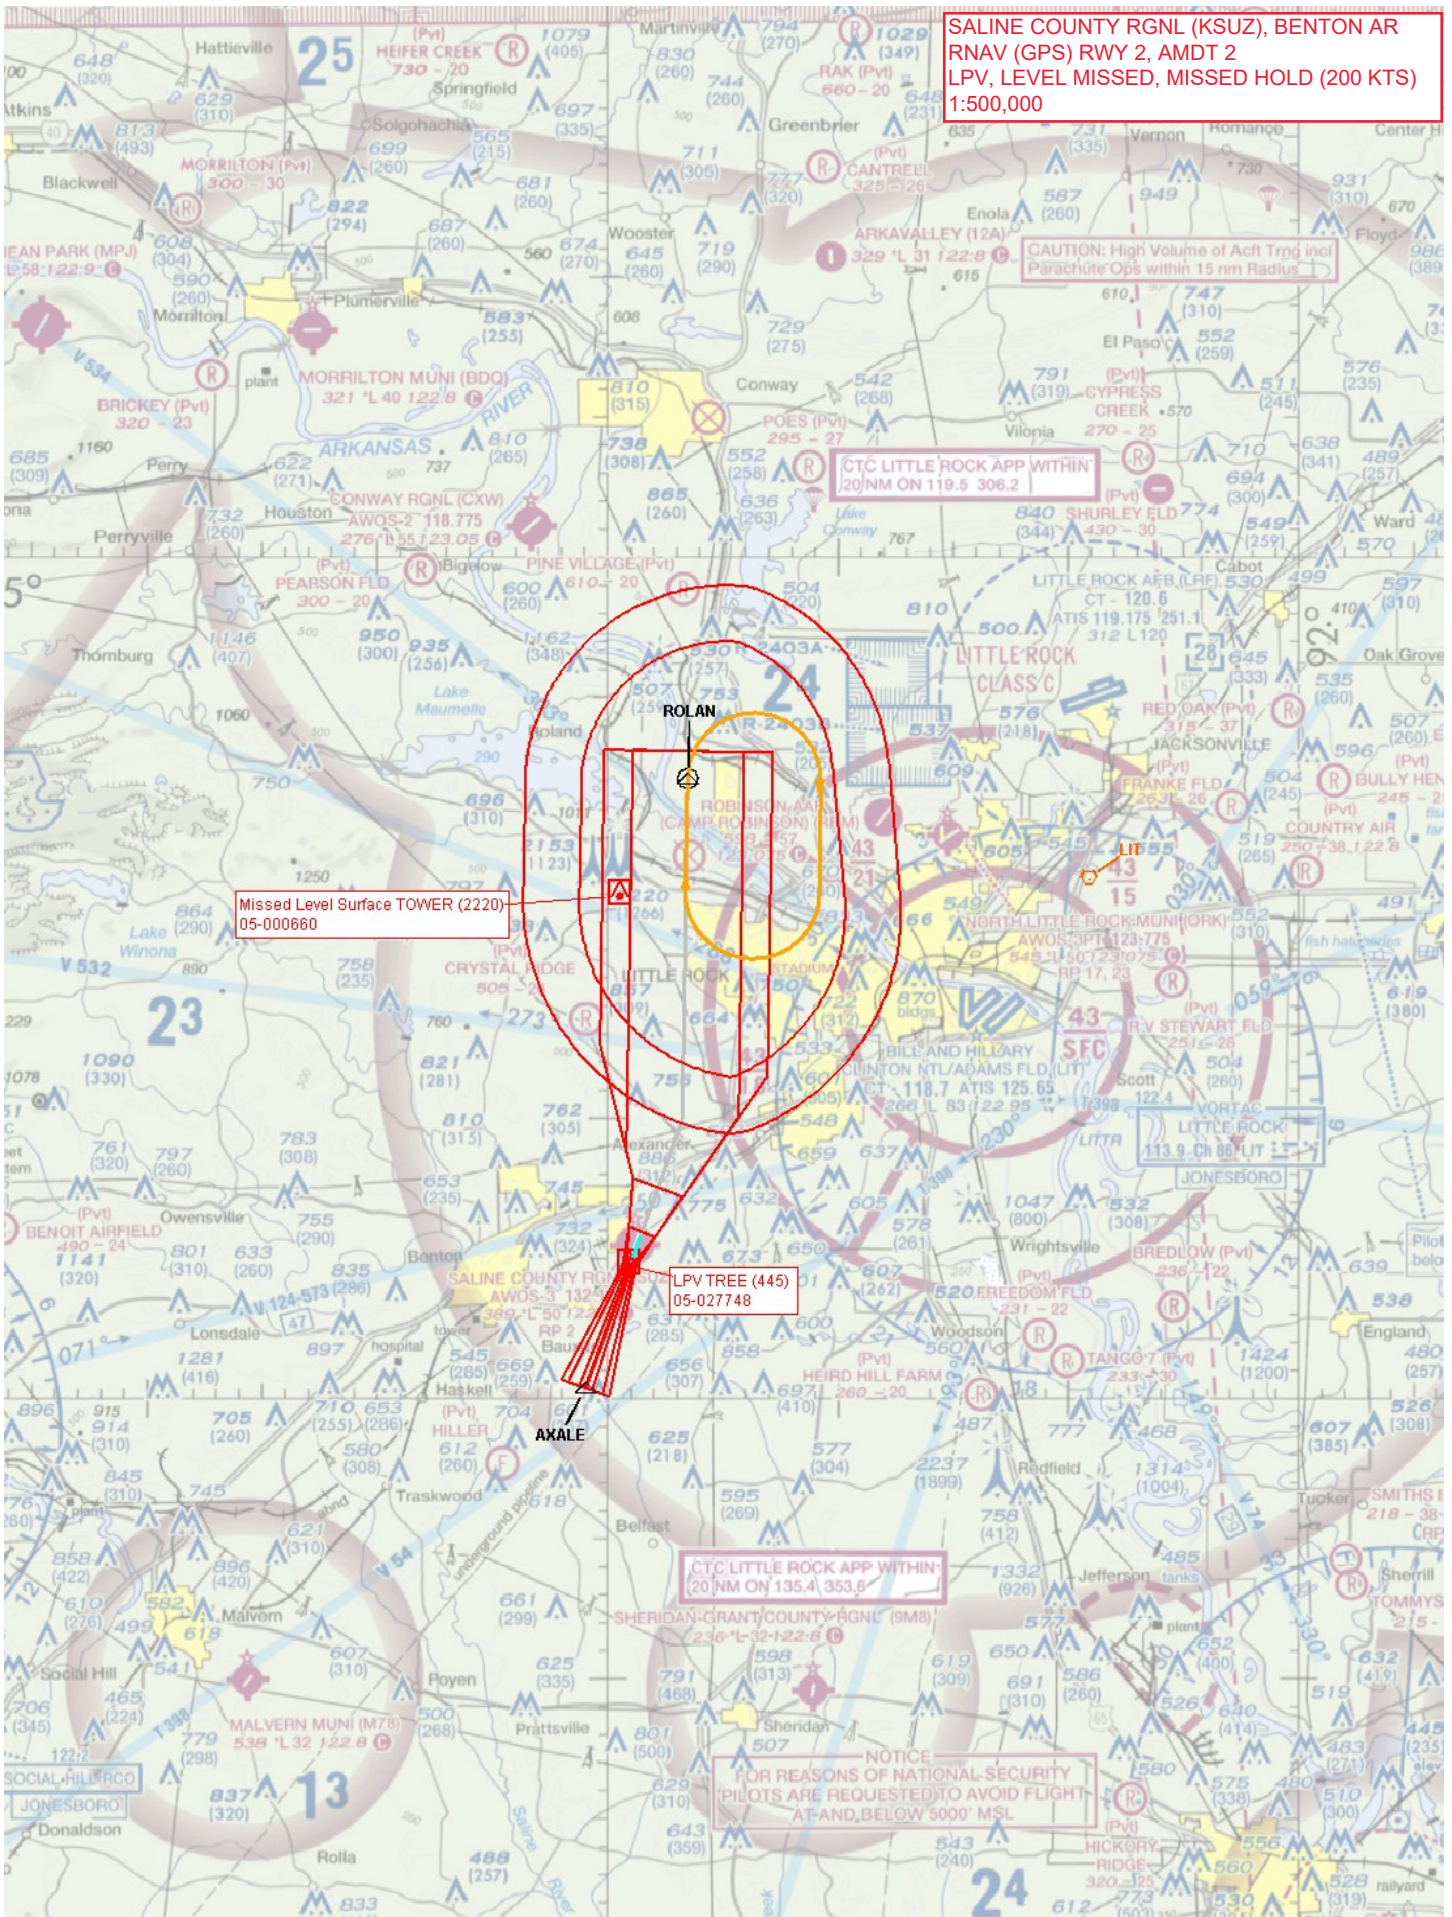

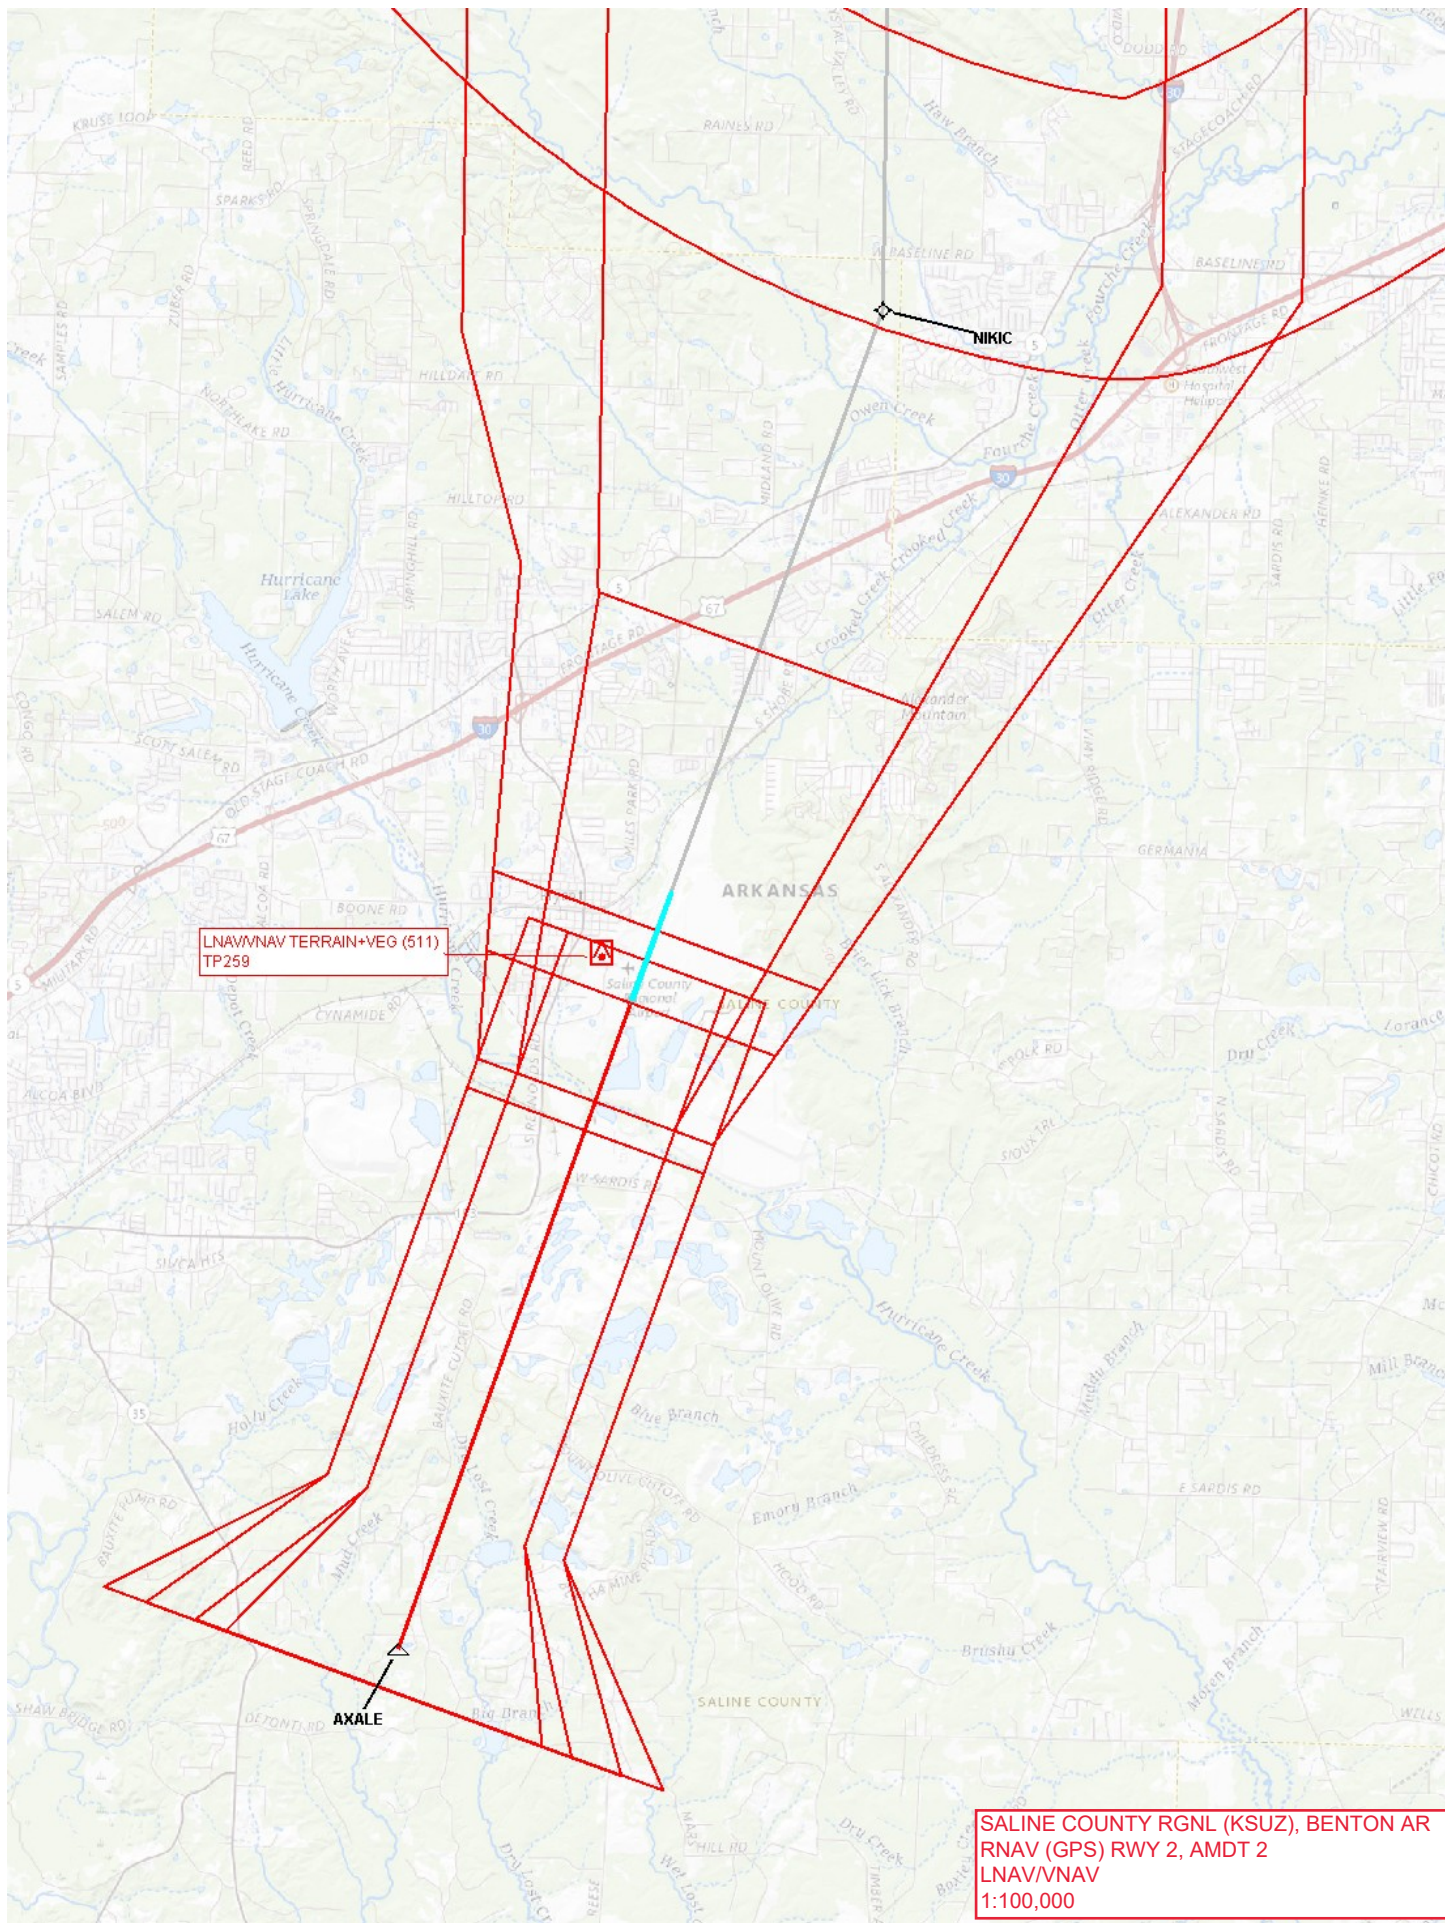

SALINE COUNTY RGRL (KSUZ), BENTON AR
RNAV (GPS) RWY 2, AMDT 2
LNAV/VNAV
1:100,000

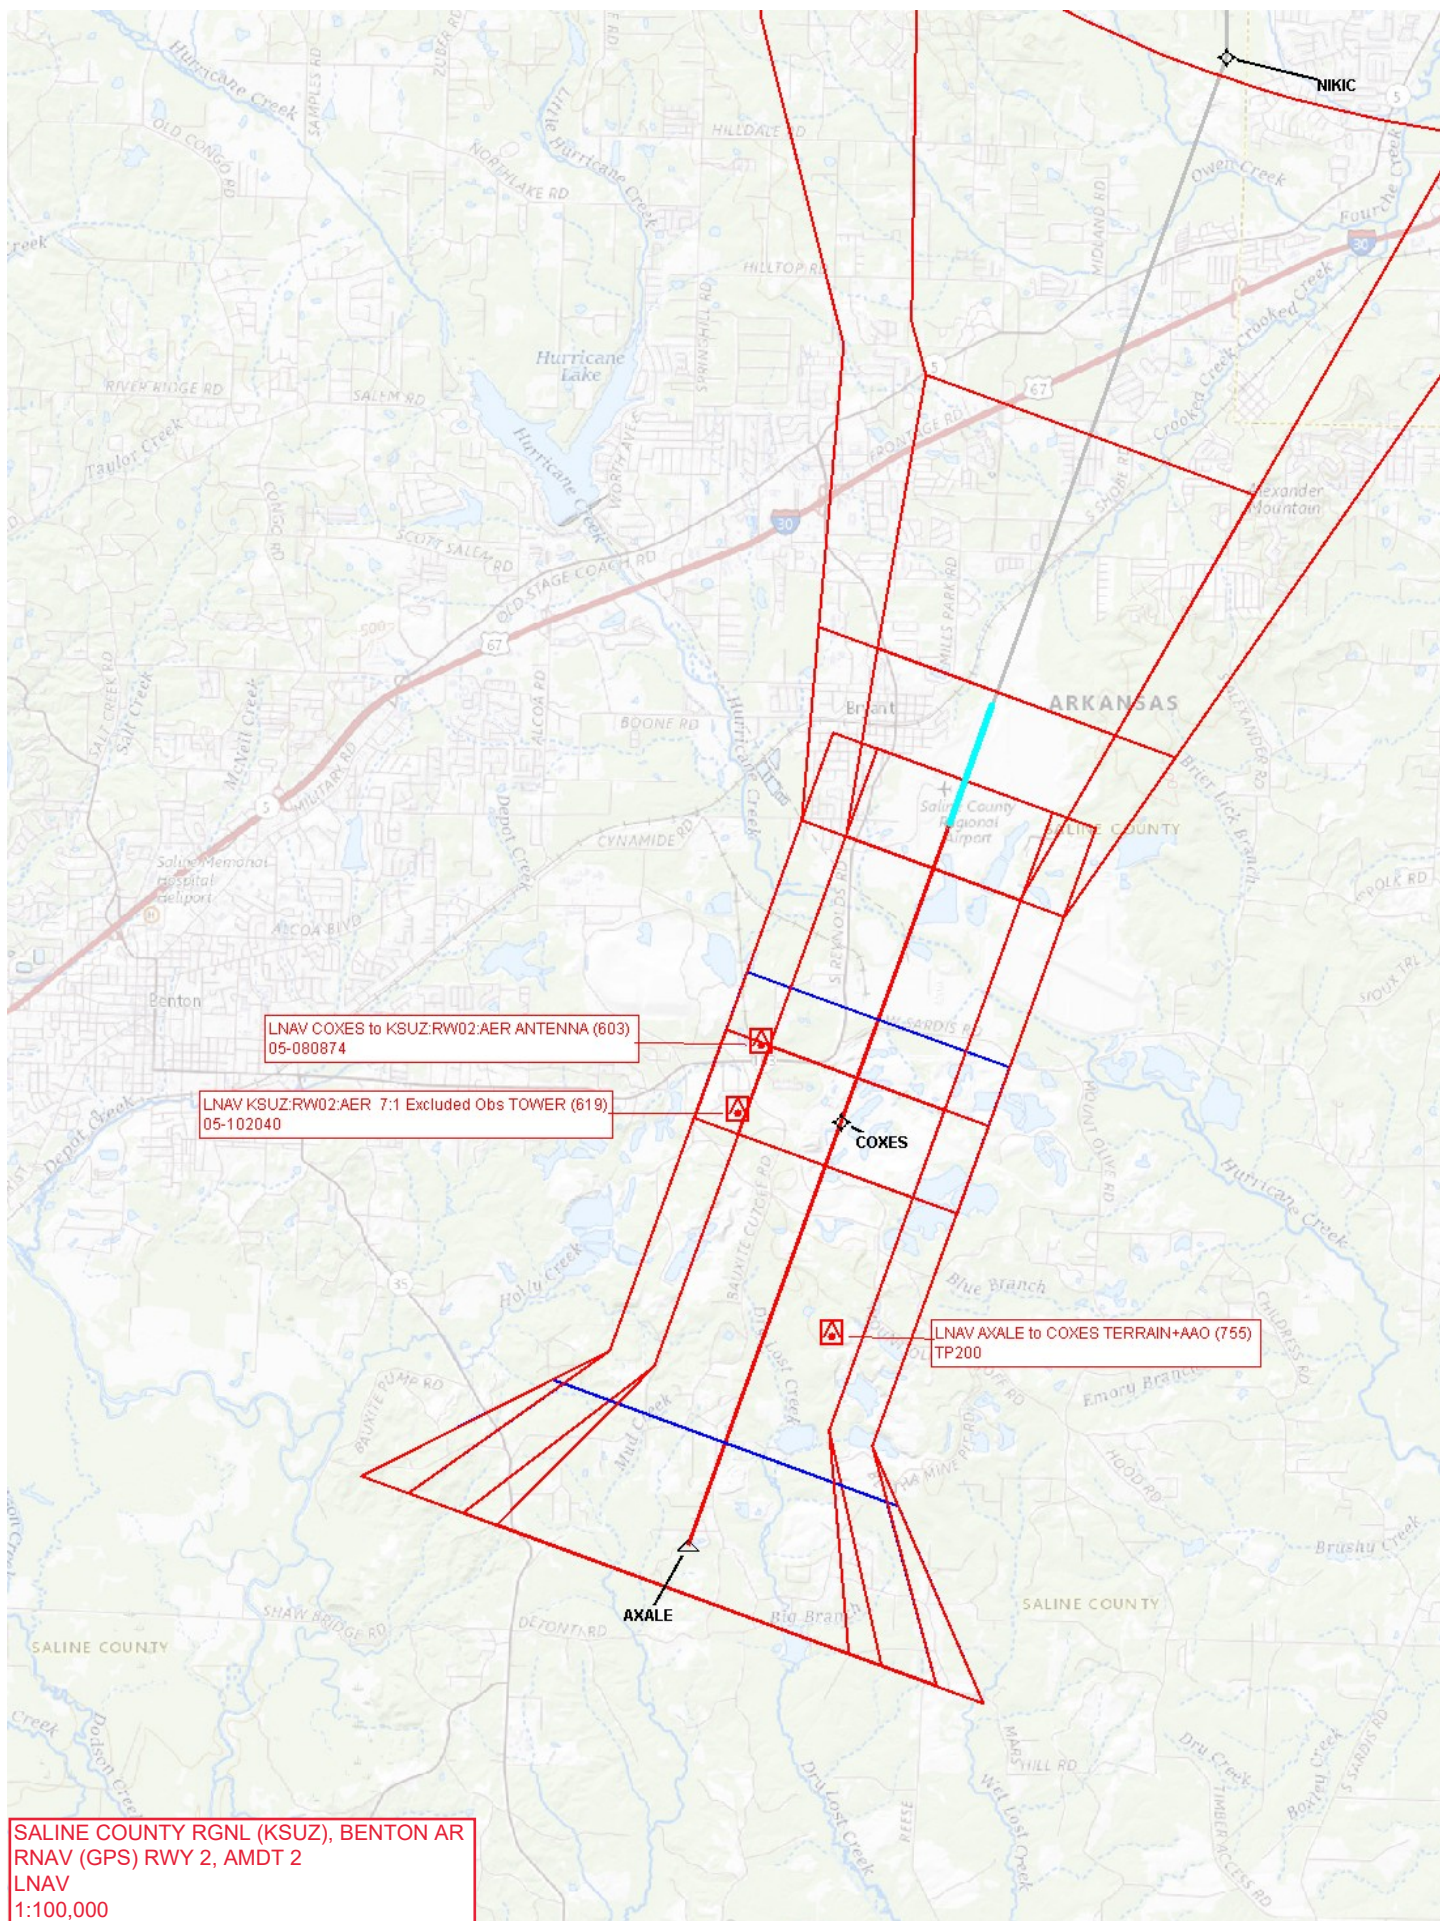

SALINE COUNTY RGRL (KSUZ), BENTON AR
RNAV (GPS) RWY 2, AMDT 2
CIRCLING
1:100,000

