

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 08/07/2025	APWS Task ID: 85AB965E04CE41F7859CA5F4B500E00F	APWS Project ID: CAEBFB4CA8794B5A8495B39BC7231127
Procedure: RNAV (GPS) RWY 21 AMDT 1C		Enroute: NO	Specialist: Slane, Cory		Agreement Number:
Airport ID: KDVL			Airport City: DEVILS LAKE		State: ND
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: ACTIVE AIRNAV DATA USED. UPDATED MINIMUMS. AMENDED NOTES. CANCEL NOTAM FDC 3/4554. POC: KYLE THOMPSON, AJV-A330, (405) 954-2135 QUALITY 38 CHECKED QUALITY 39 CHECKED					

WAAS CH 78417 W21A	APP CRS 218°	Rwy Idg TDZE Apt Elev	4314 1449 1470
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21


DEVILS LAKE RGNL (DVL)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using Cando altimeter setting. VDP NA with Cando altimeter setting. When local altimeter setting not received, use Cando altimeter setting and increase all DA 63 feet, and all MDA 80 feet, increase LNAV and Circling Cats C and D visibility ¼ mile.

MISSED APPROACH: Climb to 3400 direct ZIKID and hold.

AWOS-3PT 125.875	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

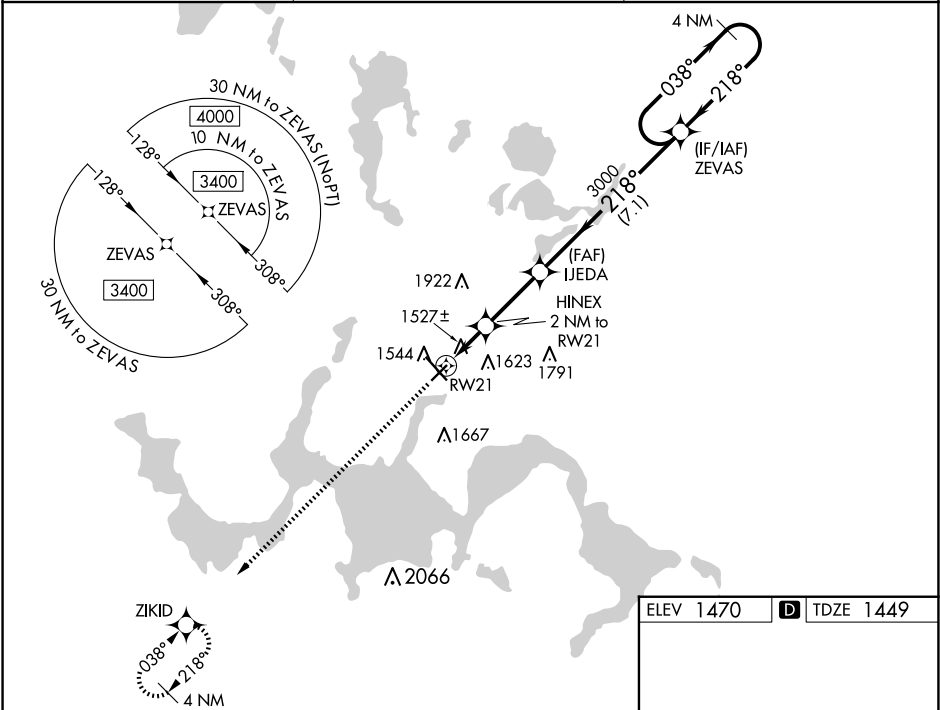

3400	ZIKID	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).	ZEVAS	4 NM Holding Pattern
*LNAV only.	HINEX 2 NM to RW21	IJEDA 3000	038° → 218° ← 3400	GP 3.00° TCH 50
	1.1 NM to RW21		2120	
			218°	
			3000	
			2.7 NM	7.1 NM
CATEGORY	A	B	C	D
LPV DA		1699-1	250 (300-1)	
LNAV/VNAV DA		1699-1	250 (300-1)	
LNAV MDA		1800-1	351 (400-1)	
CIRCLING	2000-1	530 (600-1)	2240-2¼ 770 (800-2¼)	2240-2½ 770 (800-2½)

