RNAV (GPS) RWY 20

CAPE GIRARDEAU RGNL (CGI)

WAAS	APP CRS		
CH 42832	203°	Rwy Idg	3996
W20A		TDZE	339
		Apt Elev	342

V A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Cairo Rgnl altimeter setting and increase all DA 48 feet and all MDA 60 feet; increase LNAV Cat C/D visibility and Circling Cat C/D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Cairo Rgnl altimeter setting.

MISSED APPROACH: Climb to 3000 direct ZUGUB and hold.

ASOS	MEMPHIS CENTER	CAPE GIRARDEAU TOWER ★	GND CON	UNICOM
120.55	133.65 292.15	125.525 (CTAF) L	121.6	122.95

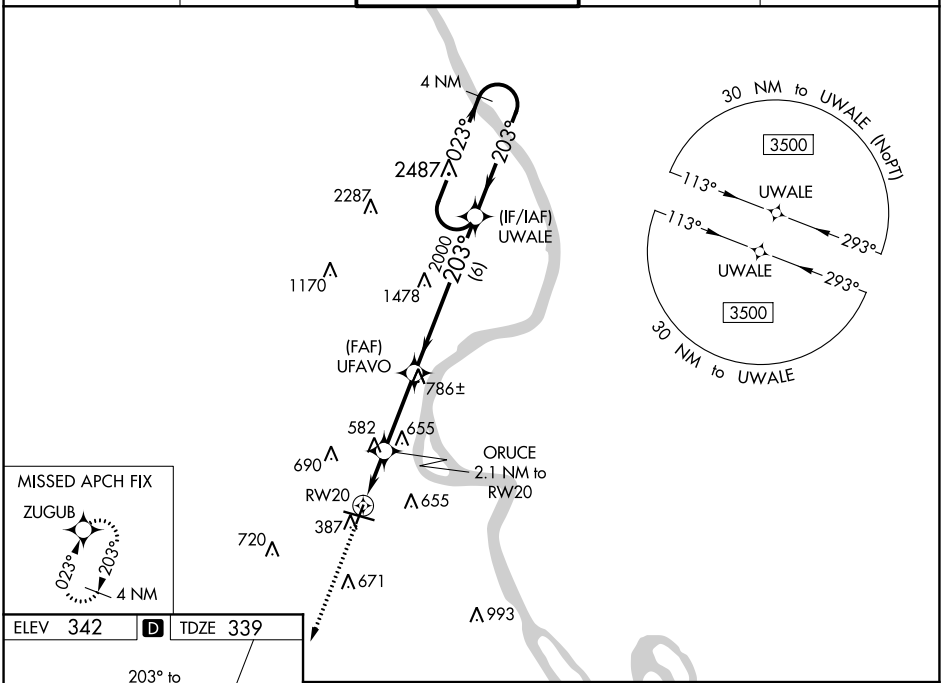

ELEV 342 D TDZE 339



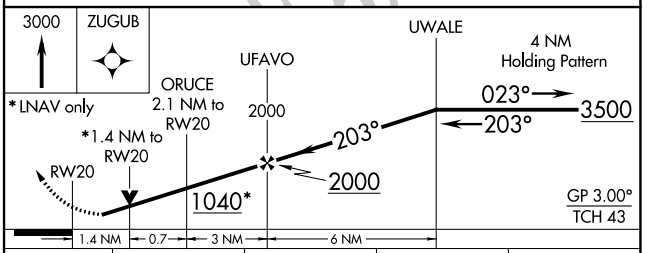

CATEGORY	A	B	C	D
LPV DA	589-1 250 (300-1)			
LNAV/VNAV DA	603-1 264 (300-1)			
LNAV MDA	840-1 501 (500-1)		840-1⅜ 501 (500-1⅜)	
C CIRCLING	860-1 518 (600-1)	960-1 618 (700-1)	1000-1¾ 658 (700-1¾)	1080-2¼ 738 (800-2¼)

MIRL Rwy 2-20 L
HIRL Rwy 10-28 L

NC-3, 16 JUL 2020 to 13 AUG 2020
NC-3, 16 JUL 2020 to 13 AUG 2020