WAAS CH 57933 W17A | APP CRS 174° | Rwy Idg 6502 | TDZE 867 | Apt Elev 874

RNAV (GPS) RWY 17

KALAMAZOO/BATTLE CREEK INTL (AZO)

T A ASR

Baro-VNAV NA when using Battle Creek altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM not authorized. When local altimeter setting not received, use Battle Creek altimeter setting and increase all DA 44 feet and all MDA 60 feet. Increase LPV all Cats and LNAV Cat C/D visibility ⅛ mile. Increase LNAV/VNAV visibility all Cats ¼ mile. Circling to Rwy 9/27 and 5/23 NA at night.

MISSED APPROACH: Climb to 2800 direct COVAV and hold.

ATIS	GREAT LAKES APP CON ★	KALAMAZOO TOWER ★	GND CON	CLNC DEL	UNICOM
127.25	121.2 239.25	118.3 (CTAF) L 257.875	121.9	121.75	122.95

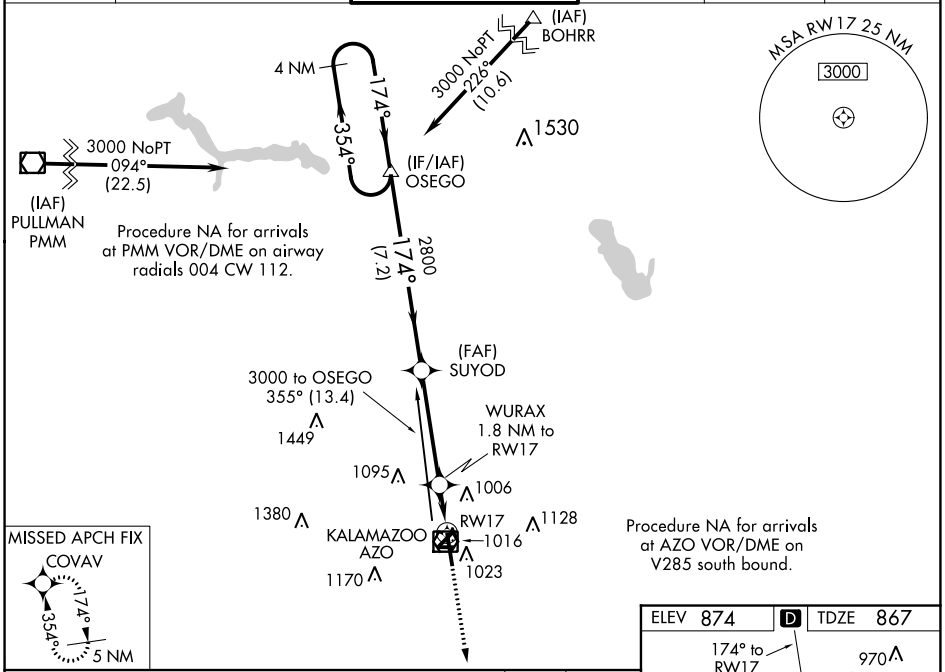

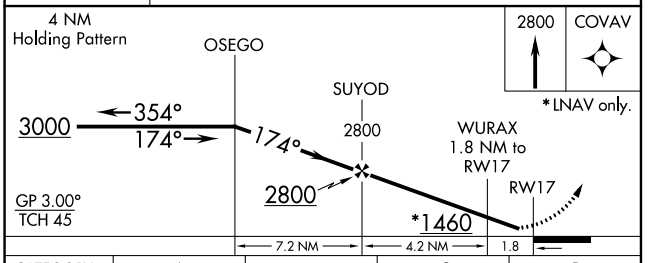

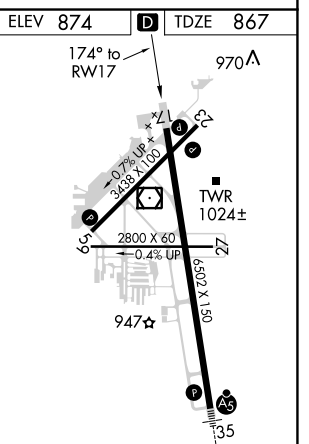

CATEGORY	A	B	C	D
LPV DA		1156-1	289 (300-1)	
LNAV/VNAV DA		1185-1	318 (400-1)	
LNAV MDA	1320-1 453 (500-1)		1320-1⅜ 453 (500-1⅜)	
C CIRCLING	1380-1 506 (600-1)		1480-1¾ 606 (700-1¾)	1480-2 606 (700-2)

HIRL Rwy 17-35 L
REIL Rwys 5, 17 and 23 L
MIRL Rwys 5-23 and 9-27 L

EC-1, 10 SEP 2020 to 08 OCT 2020
EC-1, 10 SEP 2020 to 08 OCT 2020