

SC-1, 10 SEP 2020 to 08 OCT 2020



TAKEOFF MINIMUMS

Rwys 3, 18, 21, 36: Standard with minimum climb of 500' per NM to 1700.

**TOP ALTITUDE:
Assigned by ATC**

AWOS-3
119.55
GND CON
121.6
WESTHEIMER TOWER *
118.0
OKE CITY DEP CON
120.45 288.325

- NOTE: RADAR required.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: RNAV 1.

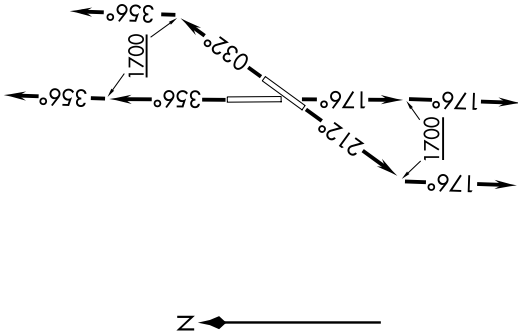

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 3: Climb heading 032° to 1700, then left turn heading 356° or as assigned by ATC, expect RADAR vectors to VOWED. Thence

TAKEOFF RWY 18: Climb heading 176° to 1700, then heading 176° or as assigned by ATC, expect RADAR vectors to VOWED. Thence

TAKEOFF RWY 21: Climb heading 212° to 1700, then left turn heading 176° or as assigned by ATC, expect RADAR vectors to VOWED. Thence

TAKEOFF RWY 36: Climb heading 356° to 1700, then heading 356° or as assigned by ATC, expect RADAR vectors to VOWED. Thence

. . . . on track 080° to FUNNL, then on (transition). Maintain 3000 or as assigned by ATC. Expect filed altitude 10 minutes after departure.

PHARA TRANSITION (FUNNL3.PHARA)

NOTE: Chart not to scale.

SC-1, 10 SEP 2020 to 08 OCT 2020