RNAV (GPS) RWY 23

MBS INTL (MBS)

WAAS	APP CRS		
CH 49010	233°	Rwy Idg	8002
W23A		TDZE	661
		Apt Elev	668

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2300 direct WERDO and hold.

ATIS	GREAT LAKES APP CON ★	SAGINAW TOWER ★	GND CON	CLNC DEL	UNICOM
125.925	126.45 235.625	120.1 (CTAF) L 257.7	121.7	121.85	122.95

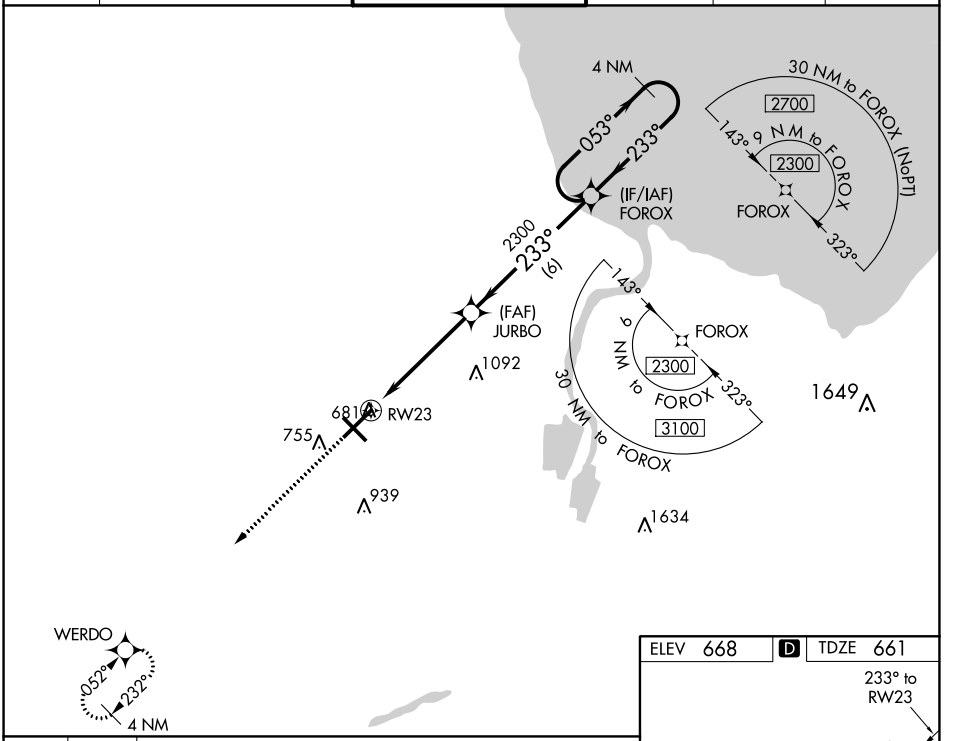

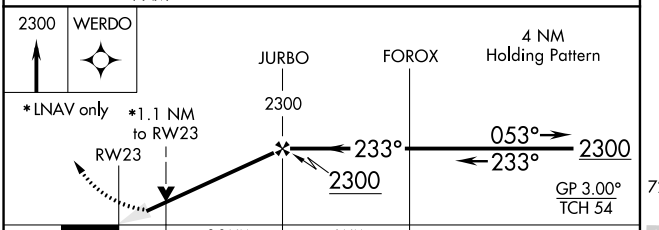

CATEGORY	A	B	C	D
LPV DA #	861/24 200 (200-½)			
LNAV/VNAV DA	940/24 279 (300-½)			
LNAV MDA	1060/24 399 (400-½)		1060/35 399 (400-⅝)	
C CIRCLING	1080-1 412 (500-1)	1120-1 452 (500-1)	1240-1½ 572 (600-1½)	1240-2 572 (600-2)

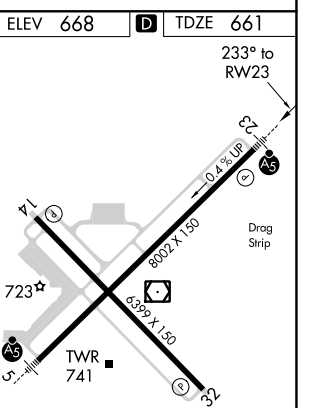

EC-1, 25 MAR 2021 to 22 APR 2021
EC-1, 25 MAR 2021 to 22 APR 2021