RNAV (GPS) Y RWY 10C

PITTSBURGH INTL (PIT)

WAAS	APP CRS		
CH **90126**	**101°**	Rwy Idg	**9708**
W10A		TDZE	**1141**
		Apt Elev	**1203**

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with ILS or LOC Rwy 10L, ILS Rwy 10L (Cat II), ILS Rwy 10L (Cat III). LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 4000 direct GUBLE and right turn on track 170° to AGC VOR/DME and hold.

D-ATIS	PITTSBURGH APP CON	PITTSBURGH TOWER	GND CON	CLNC DEL
ARR **127.25**	**123.95 360.8**	**128.3 291.7**	SOUTH **121.9 348.6**	**126.75 353.7**
DEP **135.9**			NORTH **127.8 348.6**	

CPDLC

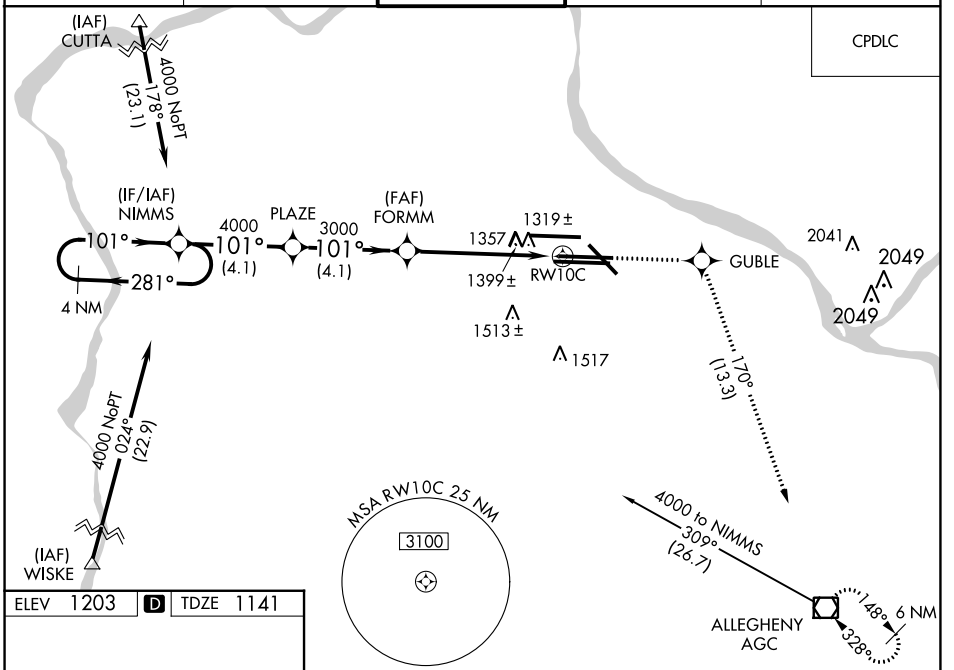

ELEV 1203 | D | TDZE 1141



REIL Rwy 10C
HIRL all Rwys
TDZ/CL Rwys 10L, 10R, 28L, 28R, 28C, and 32

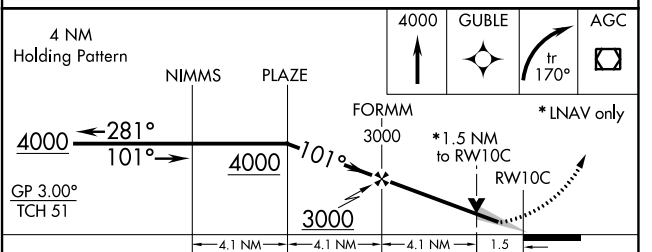

CATEGORY	A	B	C	D
LPV DA	1438/50 297 (300-1)			
LNAV/VNAV DA	1634-1¾ 493 (500-1¾)			
LNAV MDA	1660/55 519 (500-1)		1660-1½ 519 (500-1½)	1660-1¾ 519 (500-1¾)
C CIRCLING	1700-1 497 (500-1)		1880-2 677 (700-2)	1880-2¼ 677 (700-2¼)

NE-4, 13 JUN 2024 to 11 JUL 2024
NE-4, 13 JUN 2024 to 11 JUL 2024