VOR RWY 22L

JOHN F KENNEDY INTL (JFK)

VOR/DME JFK	APP CRS	Rwy Idg 8400
115.9	232°	TDZE 12
Chan 106		Apt Elev 13

DME required.

Rwy 22L helicopter visibility reduction below 1 SM NA. For inop ALS, increase S-22L Cat A/B visibility to RVR 5500.

ALSF-2

MISSED APPROACH: Climbing left turn to 3000 on JFK VOR/DME R-190 to CHANT INT/19 DME and hold.

D-ATIS (ARR/DEP)	(ARR-NE)	(ARR-SW)	NEW YORK APP CON	KENNEDY TOWER		GND CON	CLNC DEL	CPDLC
128.725	117.7	115.4	128.125 269.0	Rwys 4R/22L and 13L/31R	119.1 281.55	121.9	135.05	
				Rwys 4L/22R and 13R/31L	123.9 281.55	348.6	348.6	

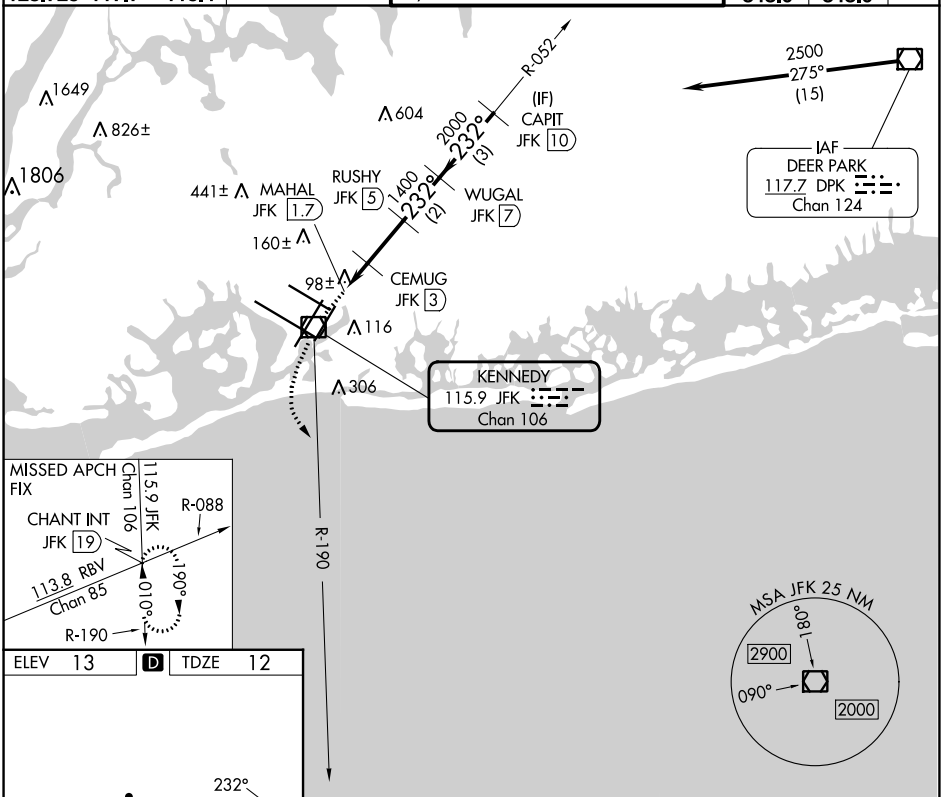

ELEV 13	D	TDZE 12



RLLS Rwys 13L and 13R
HIRL all Rwys
TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R

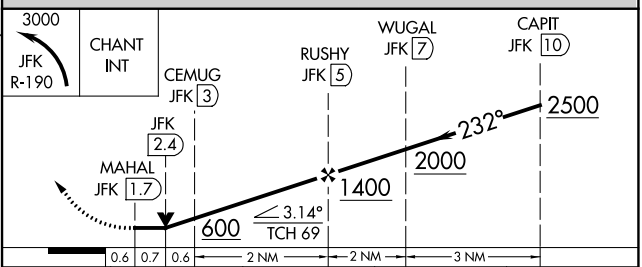

CATEGORY	A	B	C	D
S-22L	440/40 428 (500-¾)			440/50 428 (500-1)
C CIRCLING	640-1 627 (700-1)		680-1¾ 667 (700-1¾)	680-2 667 (700-2)

NE-2, 08 AUG 2024 to 05 SEP 2024
NE-2, 08 AUG 2024 to 05 SEP 2024