# RNAV (GPS) RWY 31

ALICE INTL (ALI)

| WAAS | APP CRS | Rwy Idg | 5997 |
|---|---|---|---|
| CH 81813 | 309° | TDZE | 174 |
| W31A | | Apt Elev | 178 |

RNP APCH - GPS.

T A Baro-VNAV and VDP NA when using Nueces County altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Nueces County altimeter setting: increase LPV DA to 494 feet, LNAV/VNAV DA to 524 feet; increase all MDA 60 feet and LNAV Cat C and D, and Circling Cat D visibility ¼ SM. For inop ALS, increase all LPV and LNAV/VNAV visibilities to ⅞ SM. For inop ALS with Nueces County altimeter setting, increase all LPV visibilities to ⅞ SM and LNAV Cat C and D visibility to 1⅛ SM.

MALS

MISSED APPROACH: Climb to 2100 direct UWAGO and hold.

| ASOS | KINGSVILLE APP CON ★ | UNICOM |
|---|---|---|
| 119.225 | 119.9 290.45 | 123.0 (CTAF) L |

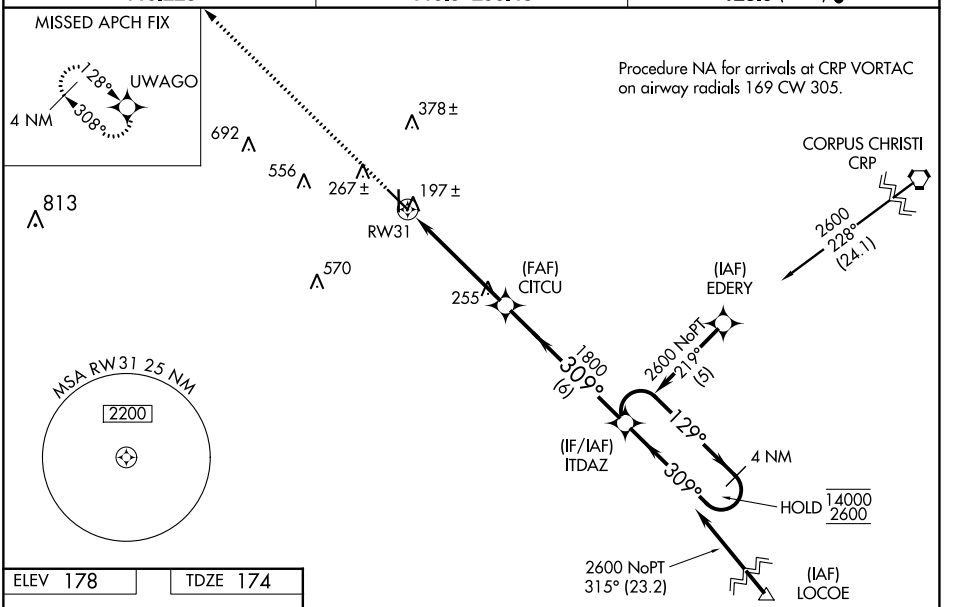


| ELEV 178 | TDZE 174 |
|---|---|




REIL Rwy 13 L
MIRL Rwys 13-31 and 17-35 L

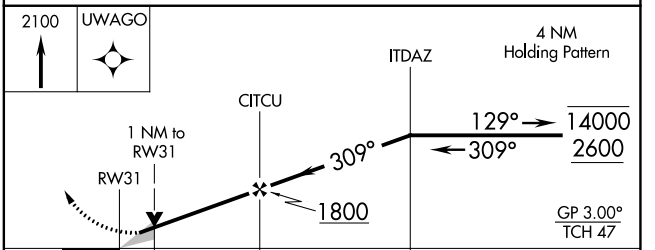


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 437-¾ 263 (300-¾) | | | |
| LNAV/VNAV DA | 467-¾ 293 (300-¾) | | | |
| LNAV MDA | 520-¾ 346 (400-¾) | | | |
| CIRCLING | 600-1 422 (500-1) | 640-1 462 (500-1) | 700-1½ 522 (600-1½) | 900-2¼ 722 (800-2¼) |



SC-3, 03 OCT 2024 to 31 OCT 2024
SC-3, 03 OCT 2024 to 31 OCT 2024