ILS or LOC RWY 1L

WICHITA DWIGHT D EISENHOWER NTL (ICT)

LOC I-TWI	APP CRS	Rwy Idg	10302
109.1	016°	TDZE	1314
		Apt Elev	1333

T A Simultaneous approach authorized with Rwy 1R.
For inoperative ALSF-2, increase S-ILS 1L Cat E visibility to RVR 4000 and S-LOC 1L Cat E visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 3000 then climbing left turn to 3600 direct ICT VORTAC and hold.

ATIS	WICHITA APP CON	WICHITA TOWER	GND CON	CLNC DEL
125.15	126.7 353.5	118.2 257.8	121.9 348.6	125.7

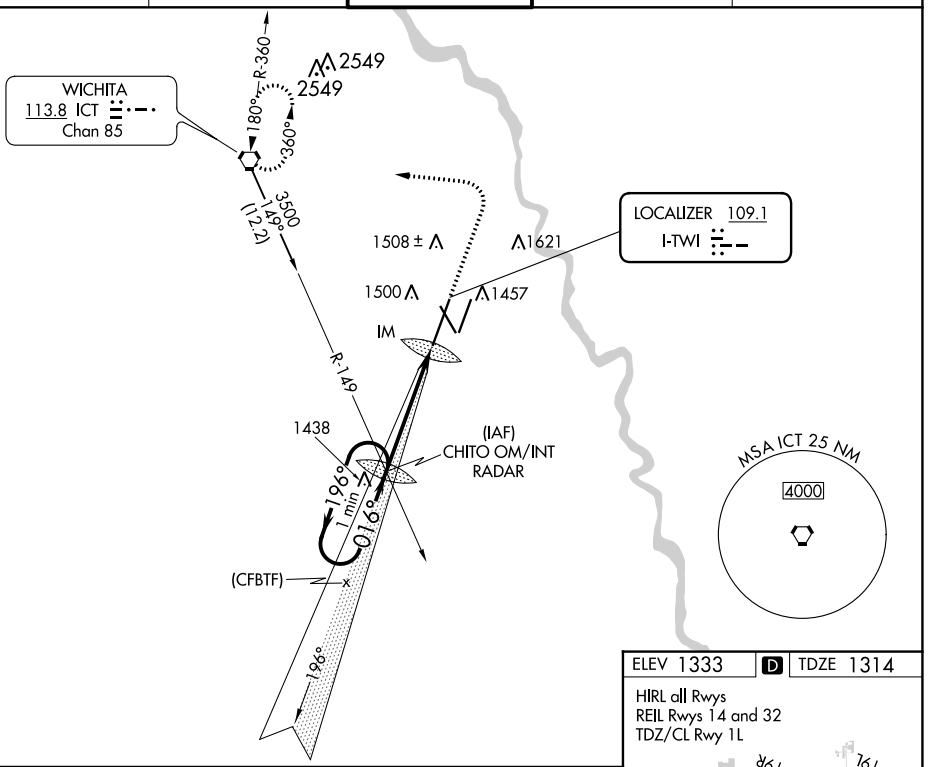

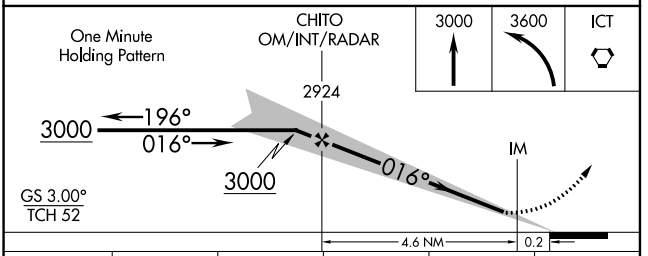

ELEV 1333 D TDZE 1314

HIRL all Rwys
REIL Rwys 14 and 32
TDZ/CL Rwy 1L

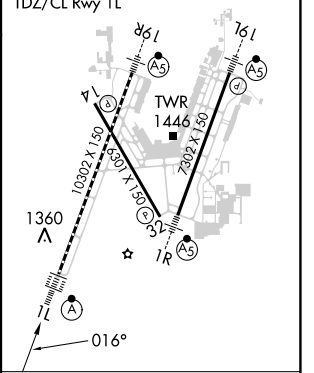

CATEGORY	A	B	C	D	E
S-ILS 1L	1514/18 200 (200-½)				
S-LOC 1L	1700/24 386 (400-½)			1700/40 386 (400-¾)	
CIRCLING	1800-1 467 (500-1)		1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)	2000-2¼ 667 (700-2¼)

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

NC-2, 28 NOV 2024 to 26 DEC 2024
NC-2, 28 NOV 2024 to 26 DEC 2024