


|   |                        |   |
|---|------------------------|---|
| LOC/DME I-SEM<br><b>110.5</b><br>Chan <b>42</b> | APP CRS<br><b>329°</b> | Rwy Idg <b>8014</b><br>TDZE <b>165</b><br>Apt Elev <b>166</b> |
|---|------------------------|---|

# ILS Z or LOC Z RWY 33



CRAIG FLD (SEM)

|   |      |  |
|---|------|--|
| ADF required.   | MALS | MISSED APPROACH: Climb to 1000 then climbing left turn to 3100 direct POLK LOM/6.2 DME/RADAR and hold, continue climb-in-hold to 3100. |
| <p>▼ Inop table does not apply to S-ILS Rwy 33.</p> <p>▲ NA For inop ALS, increase S-LOC 33 Cat E visibility to 1½ SM and ZEMUM fix minimums S-LOC 33 Cats C-E visibility to 1½ SM.</p> |      |  |

|                           |  |                               |                           |                                 |
|---------------------------|--|-------------------------------|---------------------------|---------------------------------|
| AWOS-3PT<br><b>119.15</b> | MONTGOMERY APP CON ★<br><b>124.0 363.025</b> | CRAIG TOWER★<br><b>120.85</b> | GND CON<br><b>121.675</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|---------------------------|--|-------------------------------|---------------------------|---------------------------------|

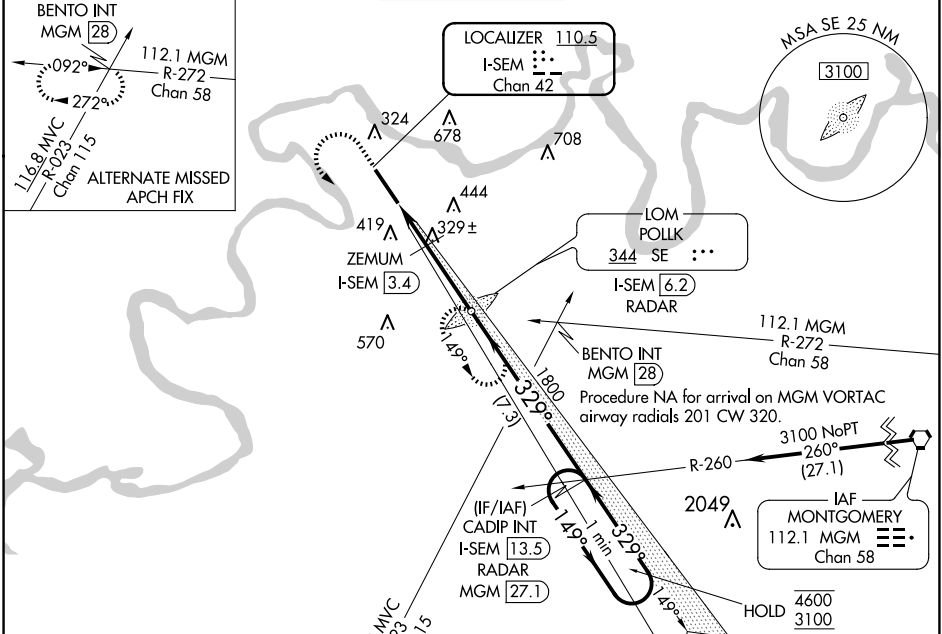

|          |          |
|----------|----------|
| ELEV 166 | TDZE 165 |
|----------|----------|

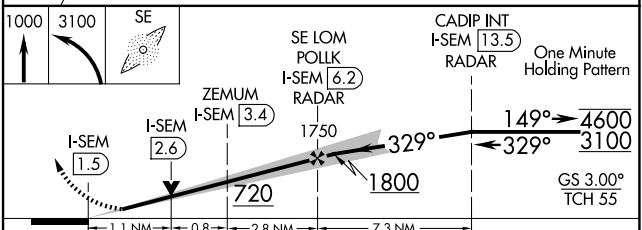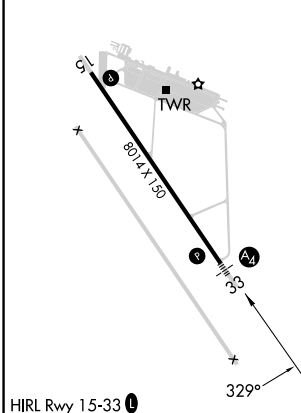

| CATEGORY           | A                 | B           | C                   | D            | E                    |
|--------------------|-------------------|-------------|---------------------|--------------|----------------------|
| S-ILS 33           | 365-¾ 200 (200-¾) |             |                     |              | 415-¾<br>250 (300-¾) |
| S-LOC 33           | 720-¾             | 555 (600-¾) | 720-1⅜ 555 (600-1½) |              |                      |
| CIRCLING           | 720-1             | 760-1       | 760-1½              | 1040-2¾      | 1040-3               |
|                    | 554 (600-1)       | 594 (600-1) | 594 (600-1½)        | 874 (900-2¾) | 874 (900-3)          |
| ZEMUM FIX MINIMUMS |                   |             |                     |              |                      |
| S-LOC 33           | 580-¾             | 415 (500-¾) | 580-1               |              | 415 (500-1)          |
| CIRCLING           | 660-1             | 760-1       | 760-1½              | 1040-2¾      | 1040-3               |
|                    | 494 (500-1)       | 594 (600-1) | 594 (600-1½)        | 874 (900-2¾) | 874 (900-3)          |

SE-4, 20 MAR 2025 to 17 APR 2025

SE-4, 20 MAR 2025 to 17 APR 2025