

WAAS CH 90430 W18B	APP CRS 178°	Rwy Idg 5949 TDZE 34 Apt Elev 36
--	------------------------	---


RNAV (GPS) RWY 18L
VALLEY INTL (HRL)

RNP APCH - GPS.


T Baro-VNAV and VDP NA when using Port Isabel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. When local altimeter setting not received, use Port Isabel altimeter setting: increase LPV DA to 276 feet; increase LNAV/VNAV DA to 326 feet and all visibilities $\frac{1}{8}$ SM; increase all MDAs 60 feet and LNAV visibility Cats C and D $\frac{1}{8}$ SM, and Circling visibility Cat C and D $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 500 then
climbing left turn to
2000 direct RELAX
and hold.

ATIS 124.85	VALLEY APP CON 120.7 279.5	HARLINGEN TOWER ★ 119.3(CTAF) 0 317.6	GND CON 121.7	UNICOM 122.95
-----------------------	--------------------------------------	---	-------------------------	-------------------------

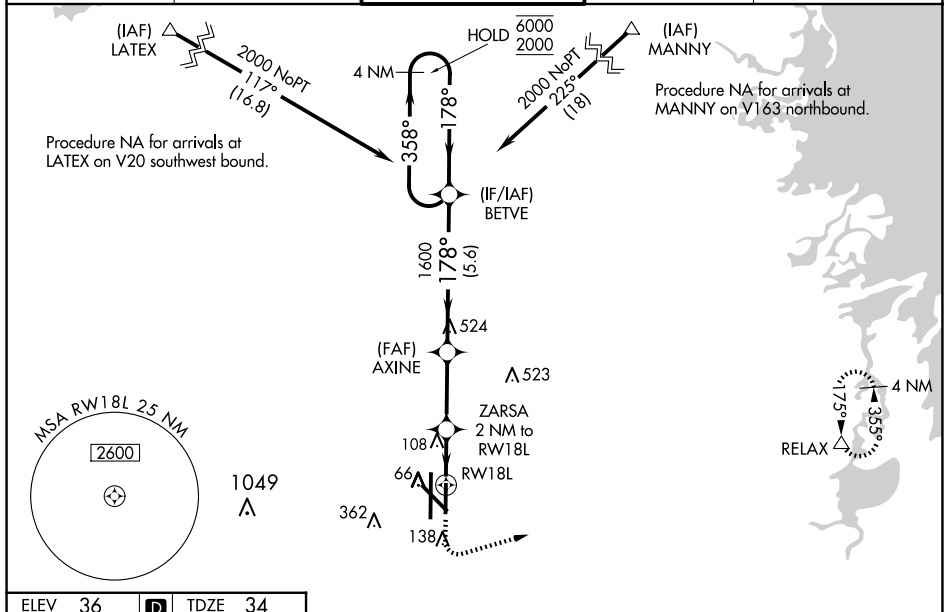

ELEV 36	D	TDZE 34
---------	----------	---------

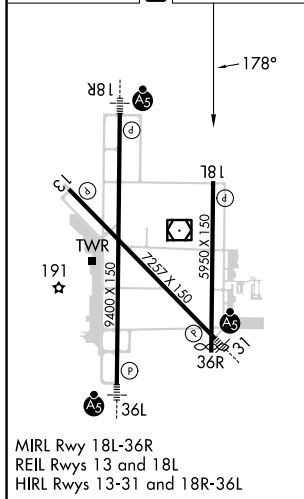

RNAV (GPS) RWY 18L