

WAAS CH 78023 W16A	APP CRS 157°	Rwy Idg TDZE 16 Apt Elev 16
--	------------------------	---

RNAV (GPS) RWY 16

ABBEVILLE CHRIS CRUSTA MEML (IYA)

RNP APCH.


▼

▲

Baro-VNAV NA when using New Iberia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use New Iberia altimeter setting and increase all DA 27 feet and all MDA 40 feet.

MISSED APPROACH:
Climb to 2000 direct
GASVE and hold.

AWOS-3PT 118.875	LAFAYETTE APP CON ★ 121.1 268.7	GCO 135.075	UNICOM 122.8 (CTAF) 0
----------------------------	---	-----------------------	---------------------------------

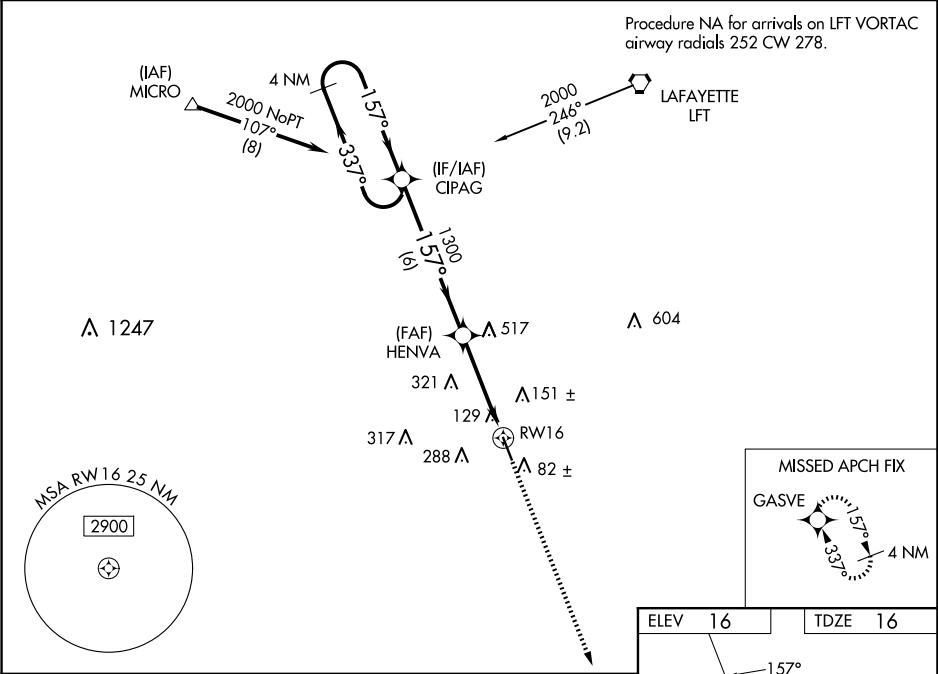

4 NM Holding Pattern		CIPAG		2000	GASVE
2000 ← 337° 157° →		HENVA 1300		RW16	
GP 3.00° TCH 50		1300			
6 NM		3.9 NM			
CATEGORY	A	B	C	D	
LPV DA	266-1	250 (300-1)		NA	
LNAV/VNAV DA	279-1	263 (300-1)		NA	
LNAV MDA	380-1	364 (400-1)		NA	
CIRCLING	520-1 504 (600-1)	600-1 584 (600-1)	700-2 684 (700-2)	NA	

ELEV 16

TDZE 16

9.1

5000 x 75

16

34

MIRL Rwy 15-33 0

REIL Rwy 15 and 33 0