


WAAS CH 56417 W14A	APP CRS 141°	Rwy Idg 9352 TDZE 85 Apt Elev 88
--	------------------------	---


RNAV (GPS) RWY 14
ALEXANDRIA INTL (AEX)

RNP APCH - GPS. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. For inop ALS increase LNAV Cat D visibility to RVR 6000. RADAR required when R-3801 A-B in use.	MALSR ⚠	MISSED APPROACH: Climb to 4000 direct EHHIR and on track 106° to MUSHE and hold.
---	------------	--

ASOS 123.975	POLK APP CON 125.4 254.8	ALEXANDRIA TOWER 127.35 (CTAF) 269.2	GND CON 121.9 372.0	CLNC DEL 121.9
------------------------	------------------------------------	---	-------------------------------	--------------------------

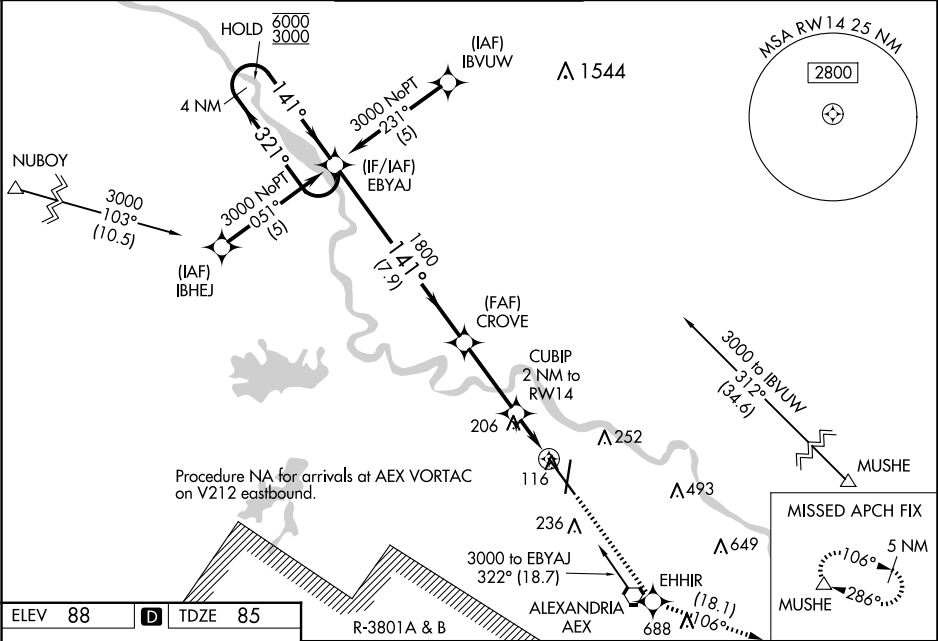

ELEV 88	D	TDZE 85
----------------	----------	----------------

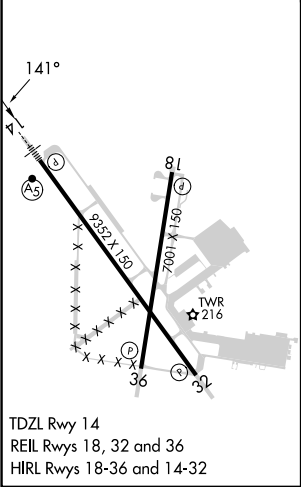

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71). 4 NM Holding Pattern EBYAJ				4000 EHHIR		tr 106° MUSHE	
GP 3.00° TCH 56				CROVE		CUBIP 2 NM to RW14	
7.9 NM				3.1 NM		1 NM	
CATEGORY A				B		C	
LPV DA				346/24		261 (300-1/2)	
LNAV/VNAV DA				488/50		403 (400-1)	
LNAV MDA				480/24		395 (400-1/2)	
CIRCLING				540-1 452 (500-1)		560-1 472 (500-1)	
				700-1 3/4 612 (700-1 3/4)		860-2 1/2 772 (800-2 1/2)	