



WAAS CH 49242 W12A	APP CRS 111°	Rwy Idg TDZE Apt Elev	3212 280 280
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12

FRESNO CHANDLER EXEC (FCH)

RNP APCH-GPS.	MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct FRAME and hold.
▼ Circling Rwy 30 NA at night. Rwy 12 helicopter visibility reduction below ¾ SM NA. ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1° C or above 54°C.	

AWOS-3 135.225	FRESNO APP CON 119.0 323.25	CLNC DEL 119.0	UNICOM 123.0 (CTAF) 0
--------------------------	---------------------------------------	--------------------------	---------------------------------

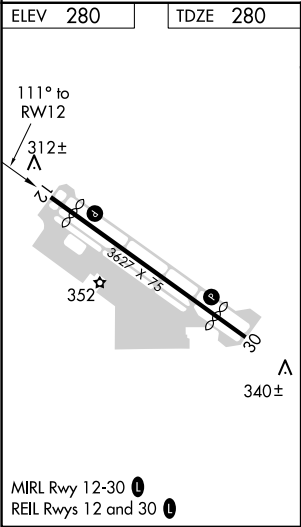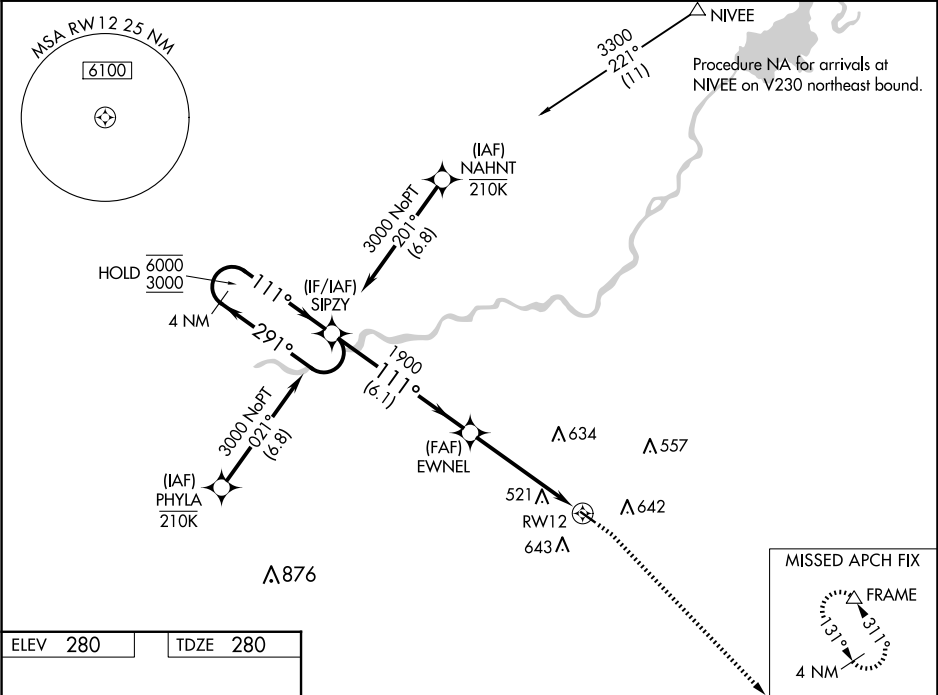

SIPZY				800	2000	FRAME
4 NM Holding Pattern				↑	↻	△
6000 ← 291° 3000 ← 111°				1.4 NM to RWY 12		
GP 3.00° TCH 40				RWY 12		
1900				1.4 NM		
6.1 NM				3.5 NM		
CATEGORY	A	B	C	D		
LPV DA	530-1 250 (300-1)			NA		
LNAV/VNAV DA	809-1½ 529 (600-1½)			NA		
LNAV MDA	780-1 500 (500-1)		780-1⅜ 500 (500-1⅜)		NA	
CIRCLING	960-1 680 (700-1)		960-2 680 (700-2)		NA	