

WAAS CH 50530 W29B	APP CRS 292°	Rwy Idg 8008 TDZE 331 Apt Elev 336
--	------------------------	---

RNAV (GPS) RWY 29L


FRESNO YOSEMITE INTL (FAT)

▼


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct WOSIM and hold.

ATIS 121.35 273.6	FRESNO APP CON 119.6 351.95	FRESNO TOWER 118.2 251.1	GND CON 121.7 348.6	CLNC DEL 124.35 348.6
-----------------------------	---------------------------------------	------------------------------------	-------------------------------	---------------------------------

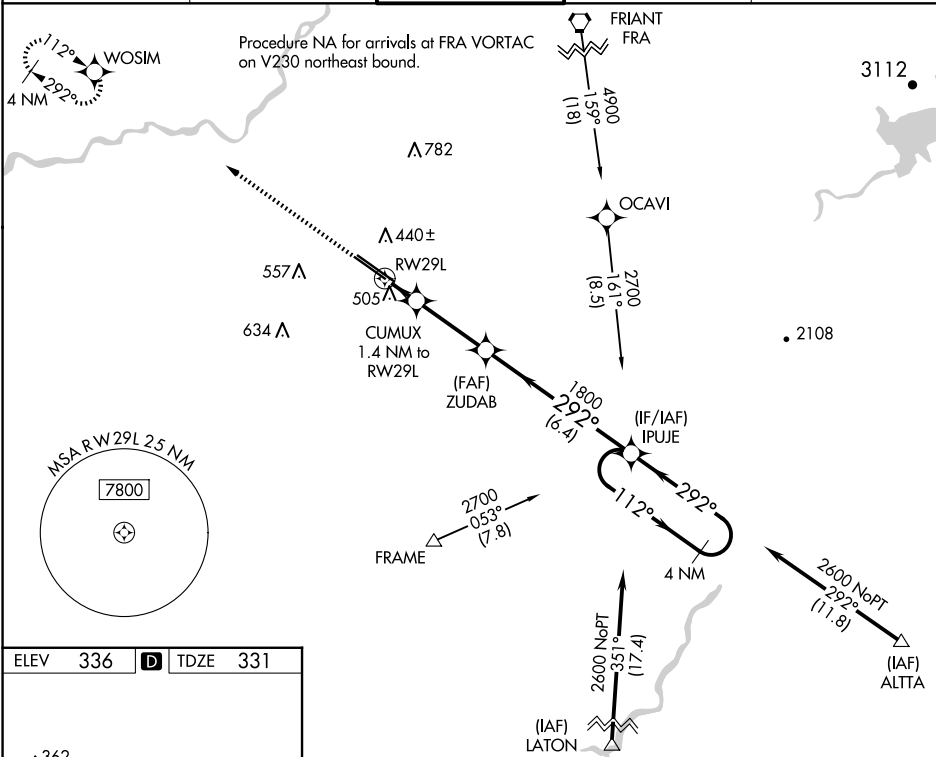

ELEV 336	D	TDZE 331
----------	---	----------

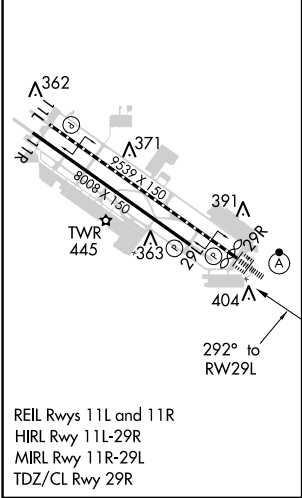

2000

WOSIM

4 NM Holding Pattern

IPUJE

112°

2600

292°

1800

292°

1800

1800

ZUDAB

1.4 NM

CUMUX

1.4 NM to RW29L

3.1 NM

820

6.4 NM

GP 3.00°

TCH 52

RW29L

*LNAV only.

CATEGORY	A	B	C	D
LPV DA	581-¾		250 (300-¾)	
LNAV/VNAV DA	667-1⅛		336 (400-1⅛)	
LNAV MDA	760-1	429 (500-1)	760-1¼	429 (500-1¼)
CIRCLING	820-1	484 (500-1)	920-1½	920-2
			584 (600-1½)	584 (600-2)

SW-2, 17 APR 2025 to 15 MAY 2025

SW-2, 17 APR 2025 to 15 MAY 2025