


LOC/DME I-SAJ 111.75 Chan 54 (Y)	APP CRS 093°	Rwy Idg 7500 TDZE 668 Apt Elev 680
--	------------------------	---

ILS or LOC RWY 9L

CHICAGO O'HARE INTL (ORD)

RNAV-1 GPS or RADAR required for procedure entry. RADAR or DME required.	ALSIF-2 	MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct OBK VOR/DME and hold, continue climb-in-hold to 4000.
Simultaneous approach authorized.		

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 128.15 348.0	124.125 GND CON 118.05 (TWR NORTH) 226.675 (TWR SOUTH) (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC
--	--	-------------------------------------	---	---	--------------------------	-------

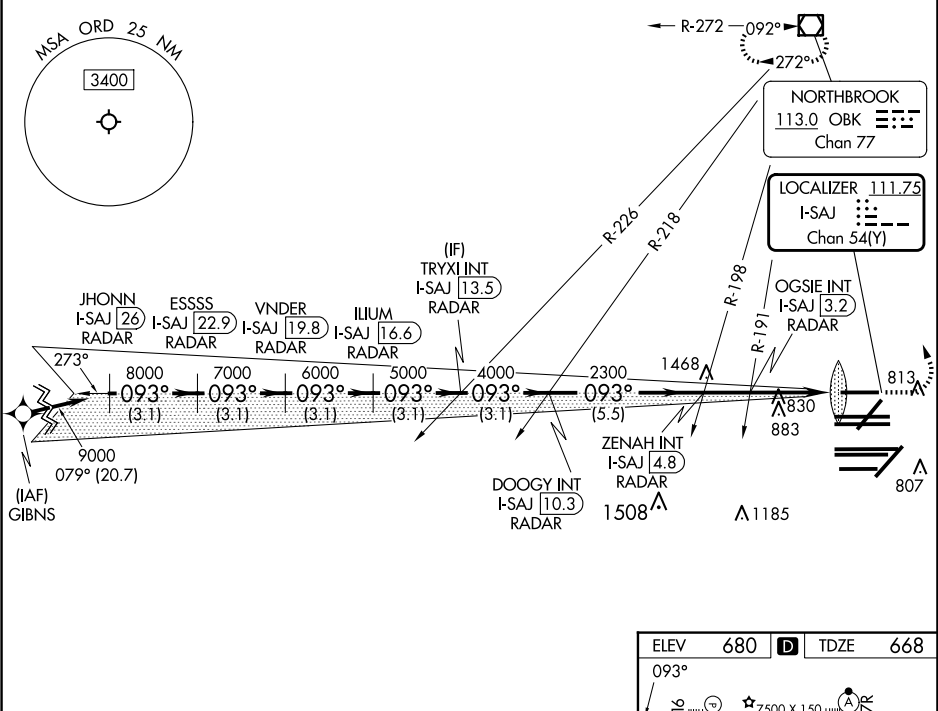

JHONN I-SAJ [26] RADAR	ESSSS I-SAJ [22.9] RADAR	VNDER I-SAJ [19.8] RADAR	TRYXI INT I-SAJ [13.5] RADAR	ZENAH INT I-SAJ [4.8] RADAR	OGSIE INT I-SAJ [3.2] RADAR	DOOGY INT I-SAJ [10.3] RADAR	ILIUM I-SAJ [16.6] RADAR	1100 4000 OBK
9000 093° 8000 7000 6000 5000 4000 2300 *1760								*LOC only
GS 3.00° TCH 55								
3.1 NM 3.1 NM 3.1 NM 3.1 NM 3.1 NM 5.5 NM 1.6 NM 2.2 1.1 0.1								
CATEGORY	A		B		C		D	
S-ILS 9L			868/18		200 (200-½)			
S-LOC 9L	1100/24		432 (500-½)		1100/40		432 (500-¾)	

