


APP CRS	Rwy Idg	7000
278°	TDZE	257
	Apt Elev	257

RNAV (RNP) Z RWY 28L
MONTEREY RGNL (MRY)

For uncompensated Baro-VNAV systems, procedure NA below 0°C (32°F) or above 48°C (120°F). RF required. GPS required.		MISSED APPROACH: Climb to 5500 on track 278° to URUYU, right turn to CUGVU, and on track 101° to SNS VORTAC and hold.			
ATIS	NORCAL APP CON	MONTEREY TOWER★	GND CON	CLNC DEL	UNICOM
119.25	133.0 251.15 (001°-135°) 127.15 307.125 (136°-360°)	118.4 (CTAF) 0 257.8	120.875 348.6	135.45	122.95

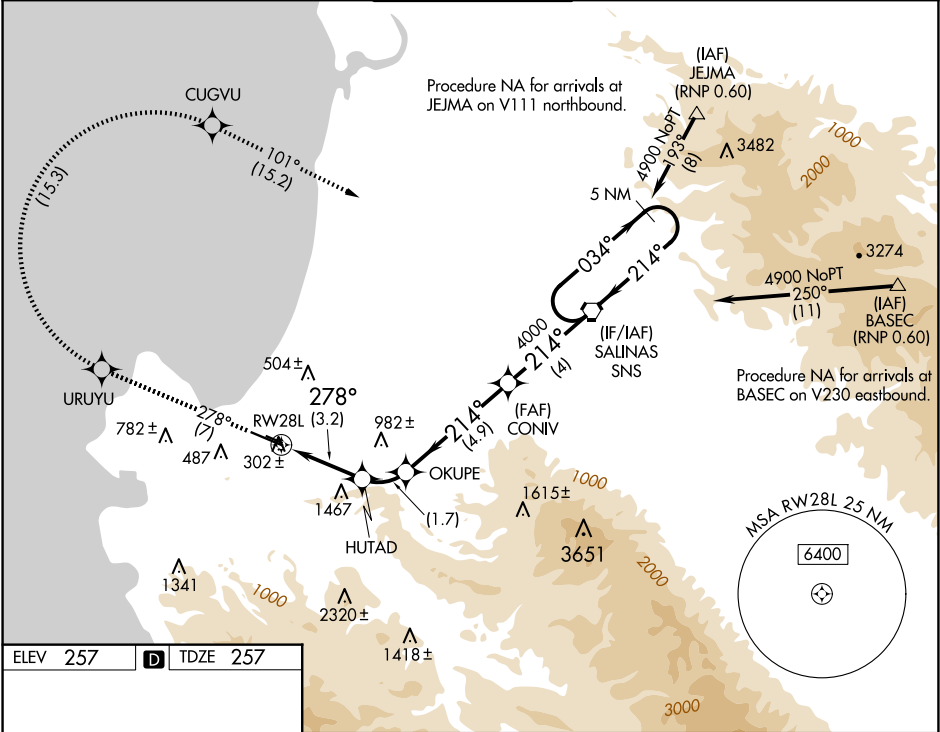

ELEV 257	TDZE 257	5500 URUYU CUGVU tr 101° SNS tr 278° 5 NM Holding Pattern SNS VORTAC CONIV HUTAD OKUPE RW28L 1505 2143 214° 4000 278° 3.2 NM 1.7 NM 4.9 NM 4 NM GP 3.60° TCH 45																							
MIRL Rwy 10L-28R HIRL Rwy 10R-28L REIL Rwy 28L REIL Rwy 10L and 28R		<table><tr><th>CATEGORY</th><th>A</th><th>B</th><th>C</th><th>D</th></tr><tr><td>RNP 0.10 DA</td><td>527/45</td><td>270 (300-7/8)</td><td></td><td>NA</td></tr><tr><td>RNP 0.15 DA</td><td>767- 1½</td><td>510 (600-1½)</td><td></td><td>NA</td></tr><tr><td>RNP 0.20 DA</td><td>1236-3</td><td>979 (1000-3)</td><td></td><td>NA</td></tr></table>				CATEGORY	A	B	C	D	RNP 0.10 DA	527/45	270 (300-7/8)		NA	RNP 0.15 DA	767- 1½	510 (600-1½)		NA	RNP 0.20 DA	1236-3	979 (1000-3)		NA
CATEGORY	A	B	C	D																					
RNP 0.10 DA	527/45	270 (300-7/8)		NA																					
RNP 0.15 DA	767- 1½	510 (600-1½)		NA																					
RNP 0.20 DA	1236-3	979 (1000-3)		NA																					

AUTHORIZATION REQUIRED

SW-2, 17 APR 2025 to 15 MAY 2025

SW-2, 17 APR 2025 to 15 MAY 2025