



WAAS	APP CRS	Rwy Idg	7499
CH 50117	147°	TDZE	417
W15A		Apt Elev	421

RNAV (GPS) RWY 15

SYRACUSE HANCOCK INTL (SYR)

RNP APCH.	MALS	MISSED APPROACH: Climb to 1600 then climbing left turn to 3200 direct STODA and hold, continue climb-in-hold to 3200.
▼ Rwy 15 helicopter visibility reduction below ¾ SM NA. ▲ Inop table does not apply to LPV DA all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.	Ⓜ Ⓜ	

ATIS 124.225	SYRACUSE APP CON 126.125 269.125	SYRACUSE TOWER 120.3 239.0	GND CON 121.7 348.6	CLNC DEL 125.05 257.775
-----------------	-------------------------------------	-------------------------------	------------------------	----------------------------

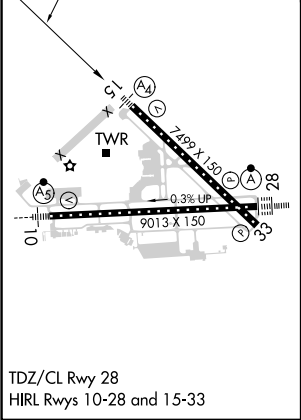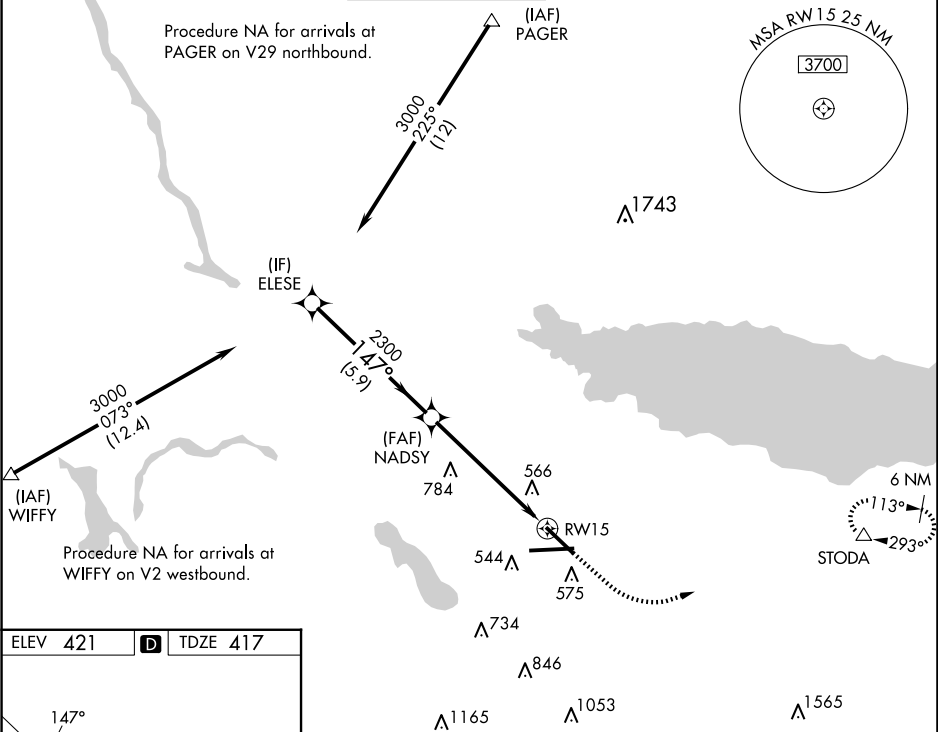

ELESE		NADSY		1600 ↑ 3200 ↖ STODA △	
3000		2300		*LNAV only.	
147°		2300		*1.3 NM to RW15	
GP 3.00° TCH 49		5.9 NM		4.5 NM	
				1.3 NM	
				RW15	
CATEGORY	A	B	C	D	
LPV DA	667-¾		250 (300-¾)		
LNAV/ VNAV	DA	894-1½	477 (500-1½)		
LNAV MDA	880-¾ 463 (500-¾)		880-1½ 463 (500-1½)		
CIRCLING	900-1 479 (500-1)	920-1 499 (500-1)	1020-1½ 599 (600-1½)	1180-2½ 759 (800-2½)	