



WAAS CH 82400 W19A	APP CRS 190°	Rwy Idg 5036 TDZE 19 Apt Elev 22
--	------------------------	---

RNAV (GPS) RWY 19

CAPE MAY COUNTY (WWD)

RNP APCH.	MISSED APPROACH: Climb to 2500 direct SEWEL and hold, continue climb-in-hold to 2500.
▼ ▲	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Circling NA for Cats C and D NE of Rwy 19 and 28. Rwy 19 helicopter visibility reduction below 1 SM NA. Circling Rwy 1 NA at night.

AWOS-3PT 118.275	ATLANTIC CITY APP CON 124.6 327.125	CLNC DEL 121.7	UNICOM 122.7 (CTAF) 0
----------------------------	---	--------------------------	---------------------------------

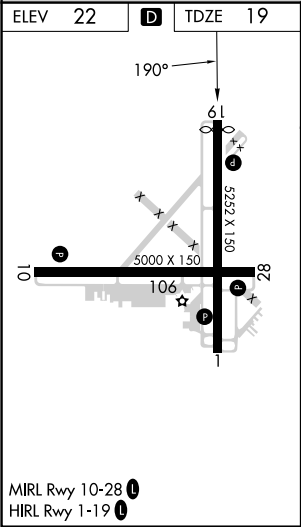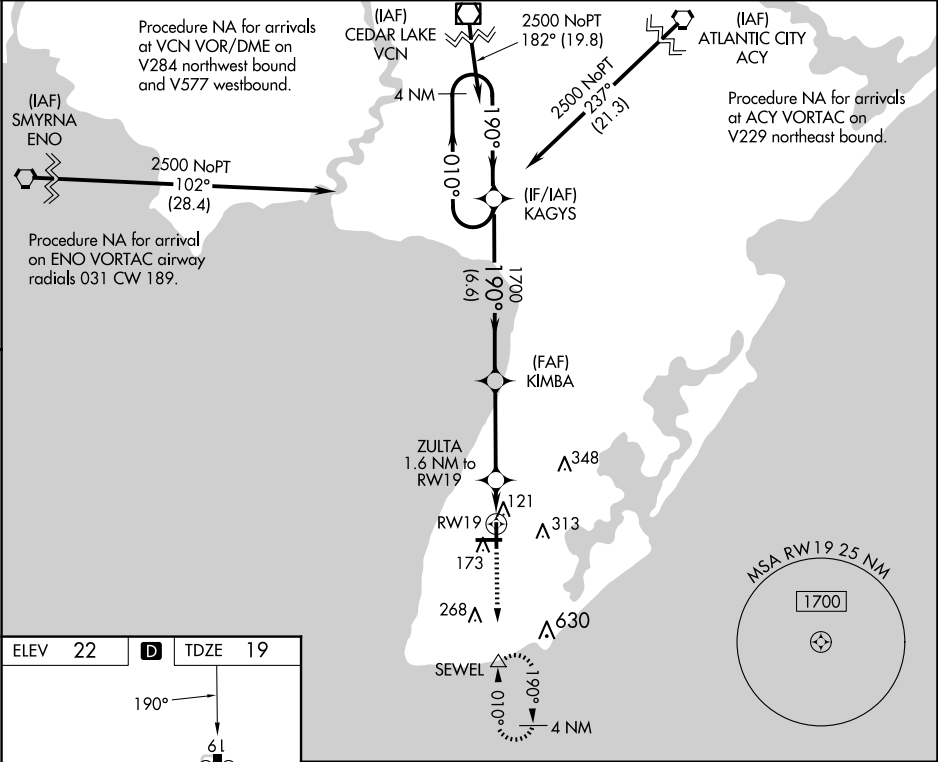

2500 ↑ SEWEL △		4 NM Holding Pattern			
*LNAV only.		KAGYS 010°→ ←190° 2500			
RW19 ZULTA 1.6 NM to RW19		KIMBA 1700 190° 1700 GP 3.00° TCH 40			
*560		1.6			
		3.6 NM		6.6 NM	
CATEGORY		A	B	C	D
LPV DA		269-1 250 (300-1)			
LNAV/VNAV DA		392-1¼ 373 (400-1¼)			
LNAV MDA		380-1 361 (400-1)			
CIRCLING		480-1 458 (500-1)	620-1 598 (600-1)	620-1½ 598 (600-1½)	980-3 958 (1000-3)