LOC I-LBL	APP CRS	Rwy Idg	7105
111.3	354°	TDZE	2875
		Apt Elev	2886

ILS or LOC RWY 35

LIBERAL MID-AMERICA RGNL (LBL)

ADF or RADAR required.

Circling NA east of Rwy 17-35. For inop ALS, increase S-LOC 35 Cats C/D visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 4000 then climbing left turn to 4600 direct PANCK LOM and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
118.375	134.0 257.625	122.8 (CTAF) L

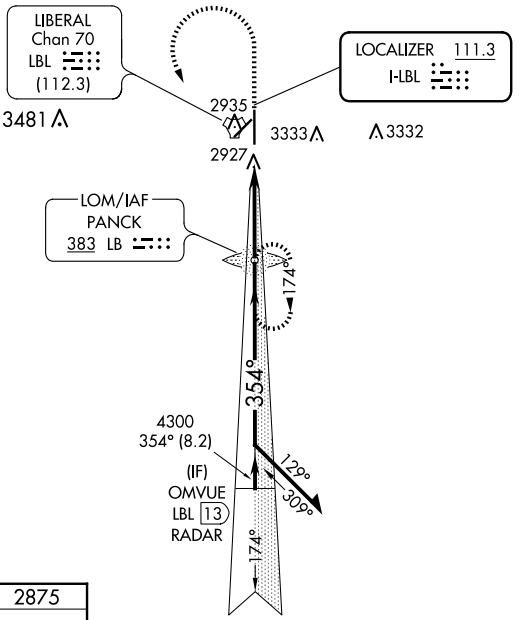

ELEV 2886 D TDZE 2875

REIL Rwys 4, 17 and 22 L

MIRL Rwy 4-22 L

HIRL Rwy 17-35 L

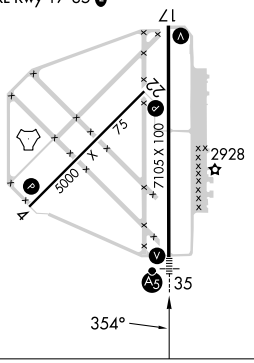

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

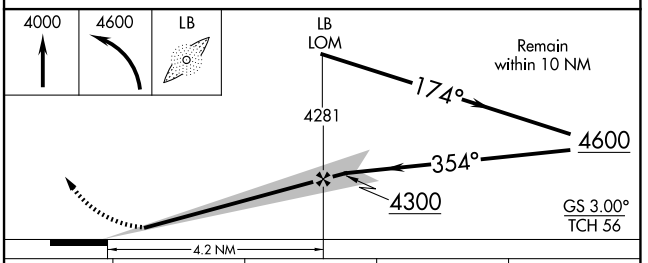

CATEGORY	A	B	C	D
S-ILS 35	3075-½ 200 (200-½)			
S-LOC 35	3180-½ 305 (300-½)			
C CIRCLING	3280-1 394 (400-1)	3400-1 514 (600-1)	3400-1½ 514 (600-1½)	3460-2 574 (600-2)

NC-2, 17 APR 2025 to 15 MAY 2025
NC-2, 17 APR 2025 to 15 MAY 2025