

LOC/DME I-DSO	APP CRS	Rwy Idg	8021
109.9	041°	TDZE	389
Chan 36		Apt Elev	422

ILS or LOC RWY 4
EVANSVILLE RGNL (EVV)




ASR


Circling Rwy 9 NA at night.

MISSED APPROACH: Climb to 1500 then climbing left turn to 2500 direct PXV VORTAC and hold.

ATIS	EVANSVILLE APP CON *	EVANSVILLE TOWER *	GND CON	CLNC DEL	UNICOM
120.2	124.025 290.9	118.7 (CTAF) 257.8	121.9	126.6	122.95

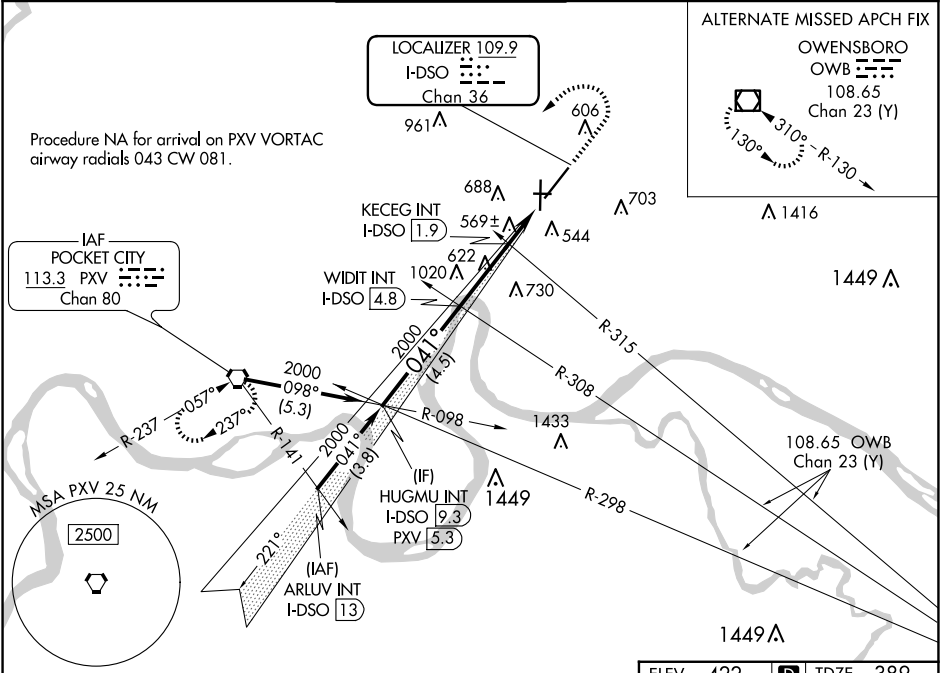

				*LOC only		1500	2500	PXV
HUGMU INT I-DSO 9.3				WIDIT INT I-DSO 4.8				
2000				2000	KECEG INT I-DSO 1.9	I-DSO DME ANTENNA		
041°				*1180		*I-DSO 1.1		I-DSO 0.2
GS 3.00° TCH 49				4.5 NM		2.8 NM		0.9 NM 1.2 NM
CATEGORY	A		B		C		D	
S-ILS 4	589-¾				200 (200-¾)			
S-LOC 4	1180-1 791 (800-1)		1180-1¼ 791 (800-1¼)		1180-2½		791 (800-2½)	
CIRCLING	1180-1 758 (800-1)		1180-1¼ 758 (800-1¼)		1180-2½		758 (800-2½)	
KECEG FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)								
S-LOC 4	820-1		431 (400-1)		820-1¼		431 (400-1¼)	
CIRCLING	920-1 498 (500-1)		1040-1 618 (700-1)		1040-1¾ 618 (700-1¾)		1040-2 618 (700-2)	

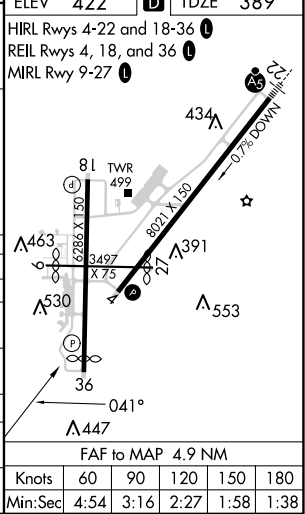

EC-2, 17 APR 2025 to 15 MAY 2025

EC-2, 17 APR 2025 to 15 MAY 2025