

VORTAC PIA	APP CRS	Rwy Idg	10104
115.2	281°	TDZE	650
Chan 99		Apt Elev	661

VOR Z or TACAN Z RWY 31

GENERAL DOWNING - PEORIA INTL(PIA)

DME required.

▼

Rwy 31 helicopter visibility reduction below RVR 5000 NA.

▲

Inop table does not apply. Straight-in and Circling Rwy 31 NA at night. Circling Rwy 13 NA at night. When local altimeter setting not received, use AAA altimeter setting; increase all MDAs 100 feet and Circling visibility Cat C/D ½ SM.



MALS R


AS

↓

MISSED APPROACH: Climb to 2800 direct PIA VORTAC and hold, continue climb-in-hold to 2800. (TACAN aircraft continue on PIA VORTAC R-269 to LOGOS/PIA 17.4 DME and hold west, right turn, 089° inbound).

ATIS 126.1 282.2	SAINT LOUIS APP CON 125.8 269.2	PEORIA TOWER 124.0 353.85	GND CON 121.85 348.6	CLNC DEL 124.675 317.55
---------------------	------------------------------------	------------------------------	-------------------------	----------------------------

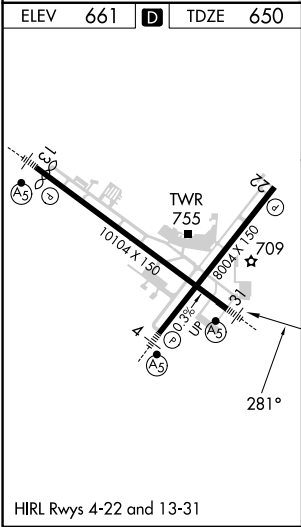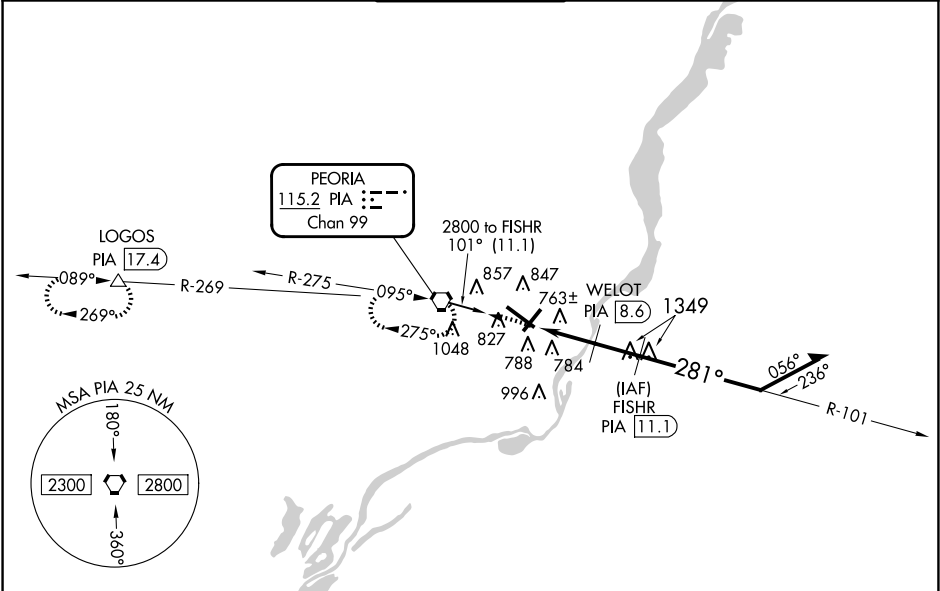

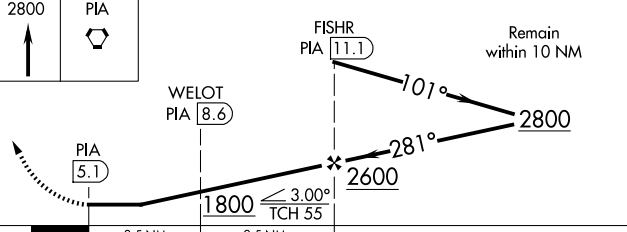2800 ↑	PIA 				
CATEGORY		A	B	C	D
S-31		1040/55	390 (400-1)	1040/60	390 (400-1½)
 CIRCLING		1160-1	499 (500-1)	1180-1½ 519 (600-1½)	1400-2¼ 739 (800-2¼)

EC-3, 17 APR 2025 to 15 MAY 2025

EC-3, 17 APR 2025 to 15 MAY 2025