

|                           |                        |                         |
|---------------------------|------------------------|-------------------------|
| LOC I-HLG<br><b>109.7</b> | APP CRS<br><b>033°</b> | Rwy Idg<br><b>5002</b>  |
|                           |                        | TDZE<br><b>1172</b>     |
|                           |                        | Apt Elev<br><b>1194</b> |

# ILS or LOC RWY 3



WHEELING OHIO COUNTY (HLG)

DME or RADAR required.

**⚠** Autopilot coupled approach NA below 1401. Inop table does not apply to S-ILS all Cats and S-LOC Cats A/B.

**MALSF** MISSED APPROACH: Climb to 1700 then climbing right turn to 3100 direct HLG VOR/DME and hold. Continue climb-in-hold to 3100.

|                        |  |   |                          |   |                         |
|------------------------|--|---|--------------------------|---|-------------------------|
| ASOS<br><b>127.375</b> | PITTSBURGH APP CON<br><b>125.275 285.575</b> | WHEELING TOWER *<br><b>118.1(CTAF) 0257.8</b> | GND CON<br><b>121.75</b> | CNLC DEL<br><b>125.275</b><br>(when twr closed) | UNICOM<br><b>122.95</b> |
|------------------------|--|---|--------------------------|---|-------------------------|

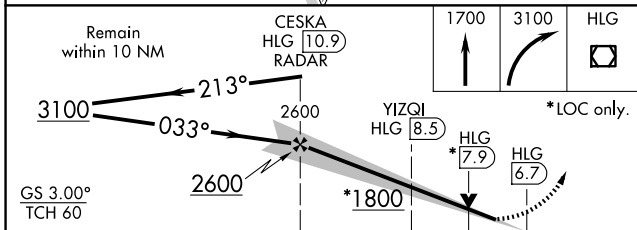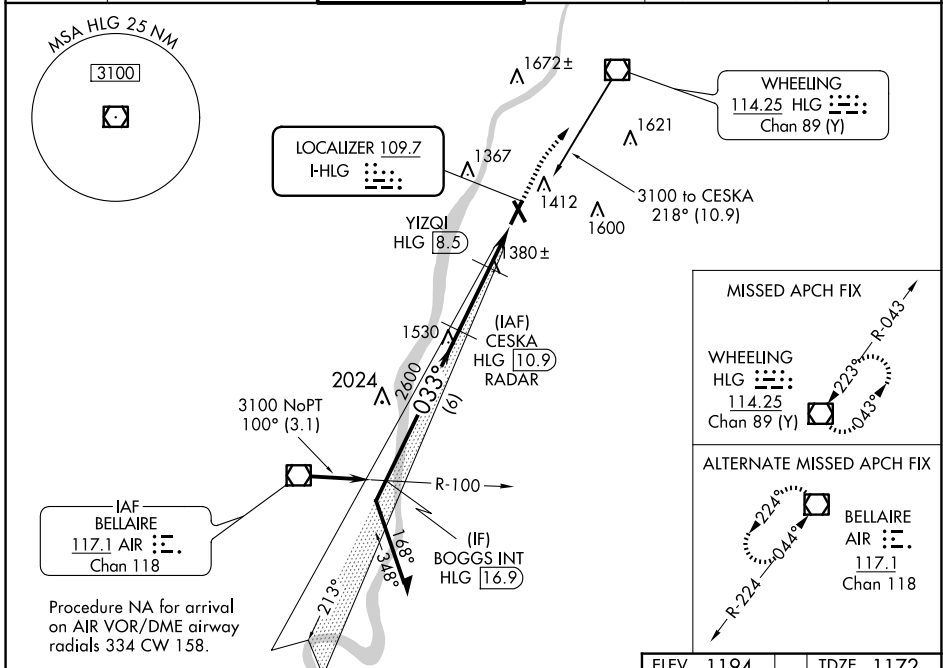

|  |                          |
|--|--------------------------|
| ELEV 1194  | TDZE 1172                |
|  |                          |
| HIRL Rwy 3-21<br>MIRL Rwy 16-34<br>REIL Rwys 21 and 34 |                          |
| FAF to MAP 4.3 NM                                      |                          |
| Knots  | 60 90 120 150 180        |
| Min:Sec  | 4:18 2:52 2:09 1:43 1:26 |

| CATEGORY           | A                     | B                     | C                     | D                       |
|--------------------|-----------------------|-----------------------|-----------------------|-------------------------|
| S-ILS 3            |                       | 1372/50               | 200 (200-1)           |                         |
| S-LOC 3            | 1800/50               | 628 (700-1)           | 1800-1½               | 628 (700-1½)            |
| <b>C</b> CIRCLING  | 1800-1                | 606 (700-1)           | 1920-2<br>726 (800-2) | 1920-2¼<br>726 (800-2¼) |
| YIZQI FIX MINIMUMS |                       |                       |                       |                         |
| S-LOC 3            | 1640/50               | 468 (500-1)           | 1640/60               | 468 (500-1¼)            |
| <b>C</b> CIRCLING  | 1720-1<br>526 (600-1) | 1740-1<br>546 (600-1) | 1920-2<br>726 (800-2) | 1920-2¼<br>726 (800-2¼) |

NE-4, 17 APR 2025 to 15 MAY 2025

NE-4, 17 APR 2025 to 15 MAY 2025