

APP CRS
006°

Rwy Idg **10000**
TDZE **896**
Apt Elev **896**

RNAV (RNP) Z RWY 36R

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)



RNP AR APCH - GPS.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C.

ALSF-2

MISSED APPROACH: Climb to 3000 on track 006° to BAIRE and on track 083° to MOAKS and hold.

D-ATIS	CINCINNATI APP CON	CINCINNATI TOWER	GND CON	CLNC DEL	CPDLC
ARR 134.375	DEP 135.3	119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	118.975 360.85 (RWY 18L/36R) 118.3 (RWYS 18C/36C, 09/27) 133.325 (RWY 18R/36L)	121.7	127.175

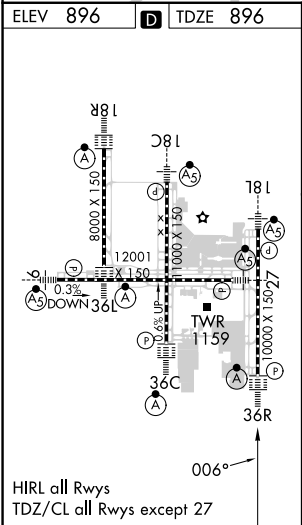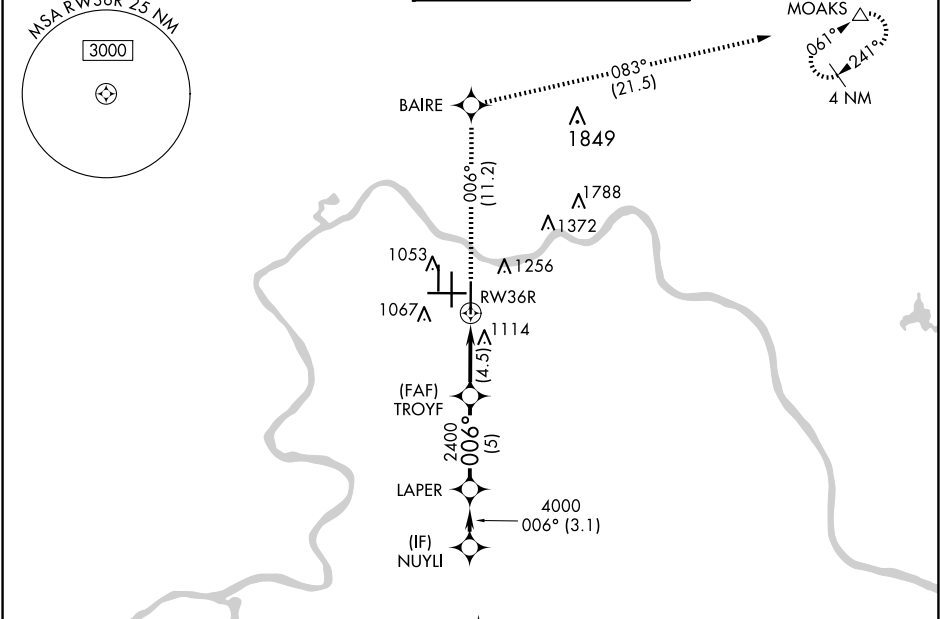

ELEV 896	D	TDZE 896
Procedure NA for arrivals at FLM VOR/DME on V517 southeast bound and V57 northbound.		
3000	tr 006°	BAIRE
	tr 083°	MOAKS
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70). NUYLI		
LAPER		
TROYF		
RW36R		
GP 3.00° TCH 55		
CATEGORY A B C D		
RNP 0.30 DA 1329/40 433 (500-3/4)		
AUTHORIZATION REQUIRED		

SE-1, 17 APR 2025 to 15 MAY 2025

SE-1, 17 APR 2025 to 15 MAY 2025