REDSTONE ARSENAL, ALABAMA

RNAV (GPS) RWY 17

WAAS CH 45638 W17A	APCH CRS 173°	Rwy ldg 7300 TDZE 685 Arpt Elev 685	AL-703 (USA)	REDSTONE AAF (KHUA)

RNP APCH - GPS

T * When ALS inop, increase CAT ABCD vis to 1 1/4 miles; increase CAT E vis to 1 1/2 miles.
** When ALS inop, increase CAT CDE vis to 1 3/8 miles.

MALSR A5

MISSED APPROACH: Climb to 3000 direct FASOV and hold.

ATIS	HUNTSVILLE APP CON/DEP CON	TOWER★	PAR
120.65	125.6 354.1	126.95 (CTAF) 290.275	

*** Circling not authorized E of Rwy 17-35.

Visibility reduction by helicopters below 1 mile not authorized.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C (16°F) or above 54°C (130°F).

Inoperative table does not apply to LPV all CAT and LNAV CAT AB.

Procedure not authorized for arrivals at TANNE westbound on T398.

Procedure not authorized for arrivals at RQZ VORTAC eastbound on T398.

Procedure not authorized when R2104A or R2104C are active.

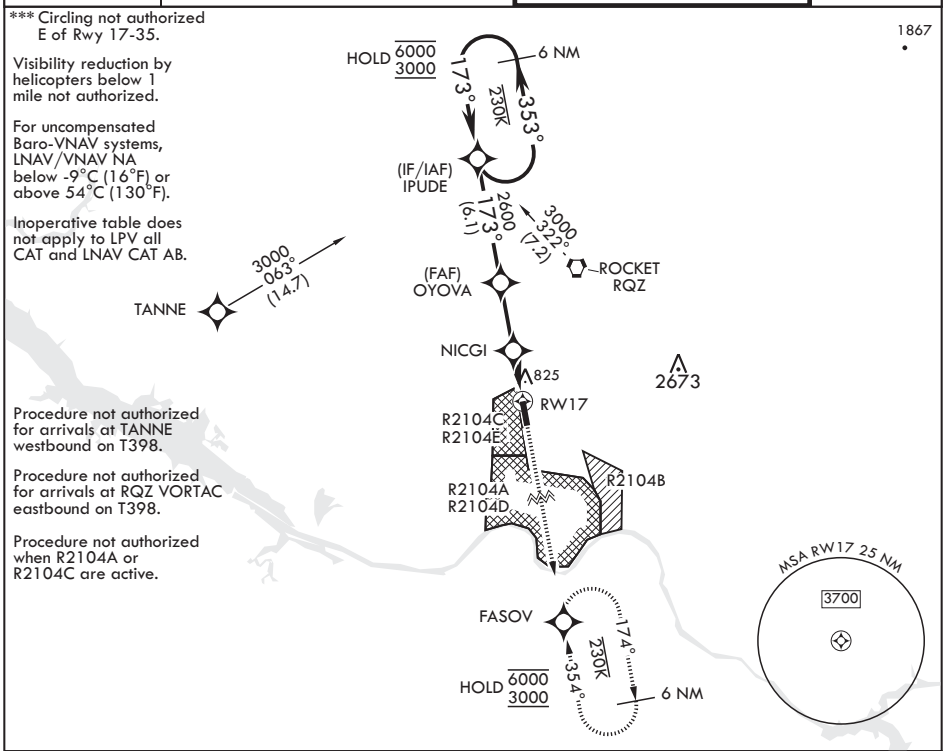

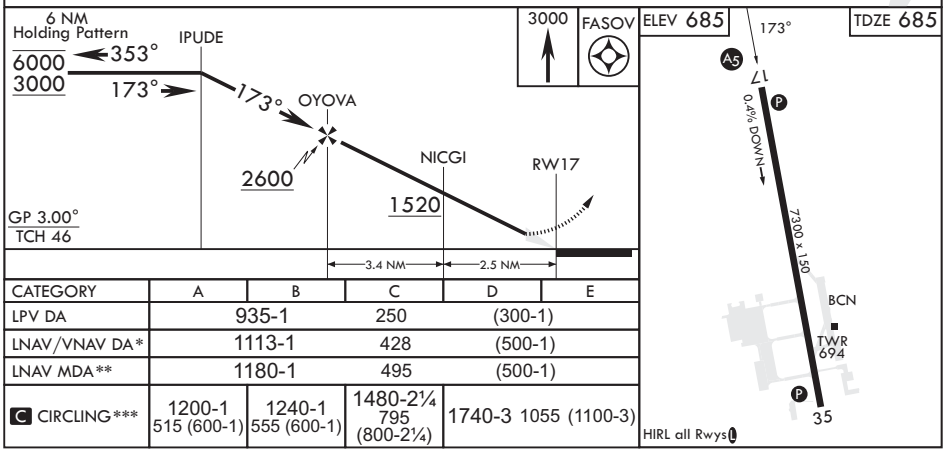

CATEGORY	A	B	C	D	E
LPV DA	935-1		250	(300-1)	
LNAV/VNAV DA*	1113-1		428	(500-1)	
LNAV MDA**	1180-1		495	(500-1)	
C CIRCLING***	1200-1 515 (600-1)	1240-1 555 (600-1)	1480-2¼ 795 (800-2¼)	1740-3 1055 (1100-3)	

SE-4, 17 APR 2025 to 15 MAY 2025