

FAYETTEVILLE, ARKANSAS

AL-728 (FAA)

24025

WAAS CH 50330 W34A	APP CRS 347°	Rwy Idg 6005 TDZE 1241 Apt Elev 1252
--	------------------------	---

RNAV (GPS) RWY 34

DRAKE FLD (FYV)


T Inop table does not apply to LP Cat A and LP/LNAV Cat C and D. For inop ODALS when using Springdale altimeter setting, increase LNAV Cat C and D visibility to 3 miles. Circling NA east of Rwy 16-34. DME/DME RNP-03 NA. Helicopter visibility reduction below $\frac{3}{4}$ SM NA. VDP NA with Springdale altimeter setting. When local altimeter setting not received, use Springdale altimeter setting and increase all MDA 40 feet. Increase LNAV Cat B and Circling Cat B and C visibility $\frac{1}{4}$ mile.

ODALS




MISSED APPROACH:
Climb to 3000 direct
ELMIE and hold.


ATIS 119.575	RAZORBACK APP CON★ 121.0 244.575	DRAKE TOWER ★ 128.0(CTAF) 0 371.9	GND CON 121.8	UNICOM 122.95
-----------------	-------------------------------------	--------------------------------------	------------------	------------------

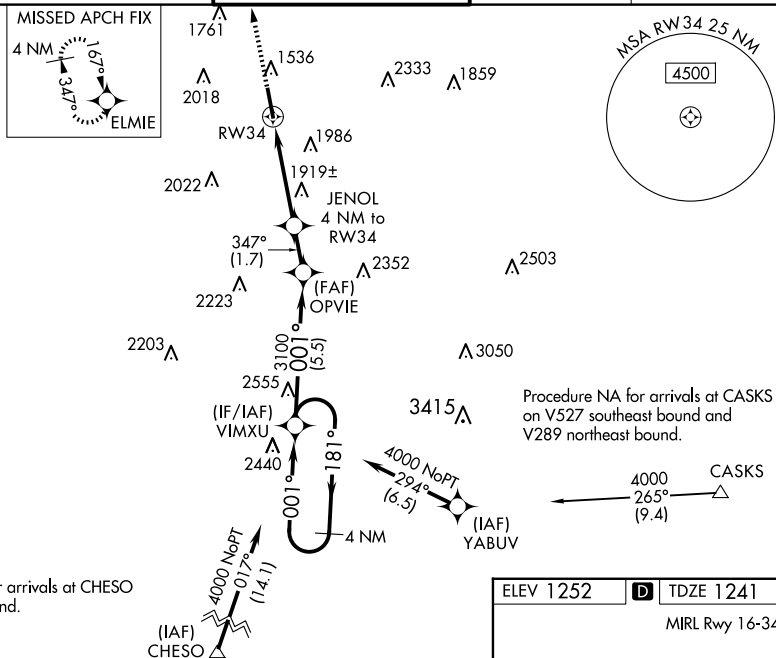

Procedure NA for arrivals at CHESO on V13 southbound.

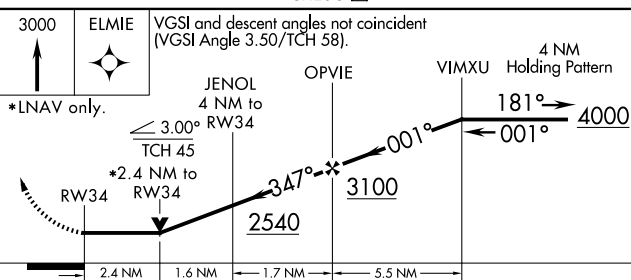

CATEGORY	A	B	C	D
LP MDA	2120-1	879 (900-1)	2120-2½	879 (900-2½)
LNAV MDA	2180-1	939 (1000-1)	2180-2½	939 (1000-2½)
C CIRCLING	2180-1¼	928 (1000-1¼)	2320-3 1068 (1100-3)	2340-3 1088 (1100-3)

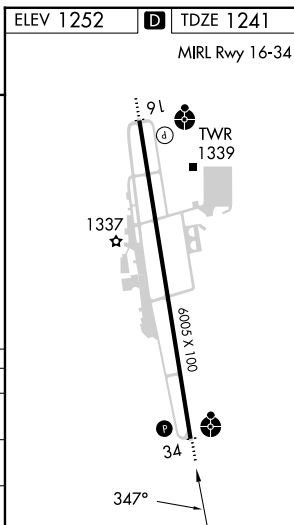

FAYETTEVILLE, ARKANSAS

Amdt 1D 05OCT23

36°00'N-94°10'W

DRAKE FLD (FYV)

RNAV (GPS) RWY 34

SC-1, 17 APR 2025 to 15 MAY 2025

SC-1, 17 APR 2025 to 15 MAY 2025