

WAAS
CH **40108**
W15A

APP CRS
155°

Rwy Idg
TDZE
Apt Elev

5000
142
143



BALTIMORE/ **RNAV (GPS) RWY 15L**

WASHINGTON INTL THURGOOD MARSHALL (BWI)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C (9°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below RVR 4000 NA. Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.

MISSED APPROACH:
Climb to 2500 direct
DUDDS and hold.

D-ATIS	POTOMAC APP CON		BALTIMORE TOWER	GND CON	CLNC DEL
115.1 127.8	119.0 282.275	(020°-100°) 119.7 290.475 (131°-180°)	119.4 257.8	121.9	118.05
	124.55 317.425	(101°-130°) 128.7 307.9 (181°-019°)			

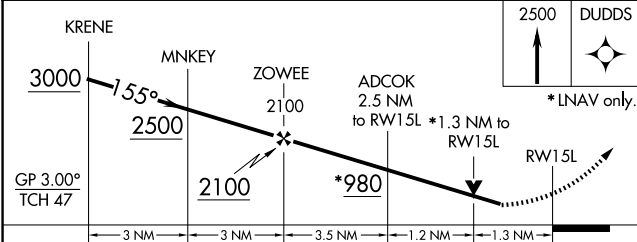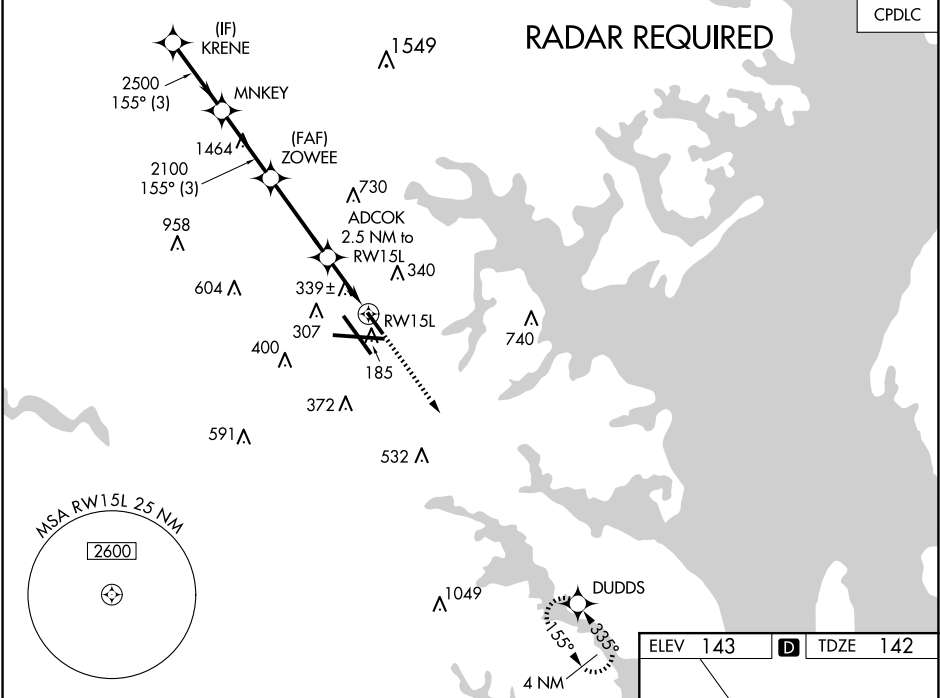

CATEGORY	A	B	C	D
LPV DA	544-1 $\frac{3}{8}$	402 (500-1 $\frac{3}{8}$)	NA	
LNAV/ VNAV DA	656-1 $\frac{3}{4}$	514 (600-1 $\frac{3}{4}$)	NA	
LNAV MDA	600/55	458 (500-1)	NA	
CIRCLING	640-1 497 (500-1)	660-1 517 (600-1)	NA	

