

LOC/DME I-HCV	APP CRS	Rwy Idg	6215
110.3	052°	TDZE	947
Chan 40		Apt Elev	947


ILS or LOC RWY 5

WEST VIRGINIA INTL YEAGER (CRW)

Autopilot coupled approach NA below 1300.

MISSED APPROACH: Climb to 1800 then climbing left turn to 3500 direct HVQ VOR/DME and hold.

ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON	CLNC DEL
127.6	124.1 269.125	125.7 257.8	121.8 348.6	118.55

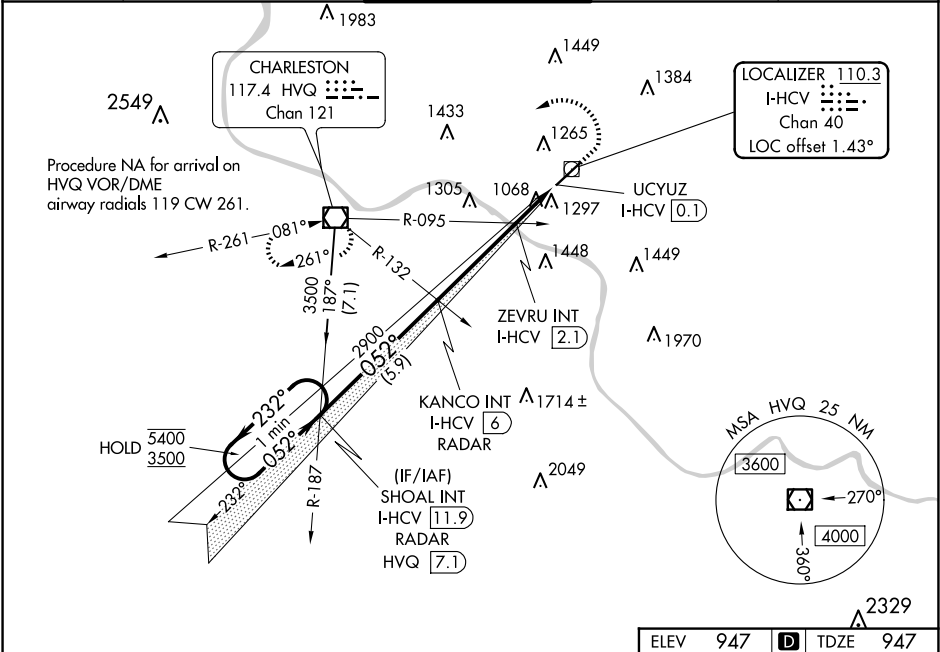

One Minute Holding Pattern		SHOAL INT I-HCV 11.9 RADAR		KANCO INT I-HCV 6 RADAR		ZEVRU INT I-HCV 2.1		I-HCV DME ANTENNA		UCUYUZ I-HCV 0.1	
5400 ← 232° 3500 → 052°		2900		2900		1640		1800 ↑		3500 ↘	
GS 3.00° TCH 56		5.9 NM		3.9 NM		1 NM		1 NM		0.1	
CATEGORY	A		B		C		D				
S-ILS 5			1197/40		250 (300-¾)						
S-LOC 5	1640/55		693 (700-1)		1640-2		693 (700-2)				
CIRCLING	1640-1		693 (700-1)		1760-2½ 813 (900-2½)		1880-3 933 (1000-3)				
ZEVRU FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)											
S-LOC 5			1320/55		373 (400-1)						
CIRCLING	1600-1		653 (700-1)		1760-2½ 813 (900-2½)		1880-3 933 (1000-3)				

