


WAAS CH 97638 W24A	APP CRS 239°	Rwy Idg 7003 TDZE 237 Apt Elev 258
--	------------------------	---

RNAV (GPS) RWY 24

SHREVEPORT RGNL (SHV)

RNP APCH.		MISSED APPROACH: Climb to 3000 direct DOCKK and hold, continue to climb-in-hold to 3000.		
Rwy 24 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C.				
ATIS 128.45	SHREVEPORT APP CON 119.9 335.55	SHREVEPORT TOWER 121.4 236.775	GND CON 121.175 236.775	CLNC DEL 124.65

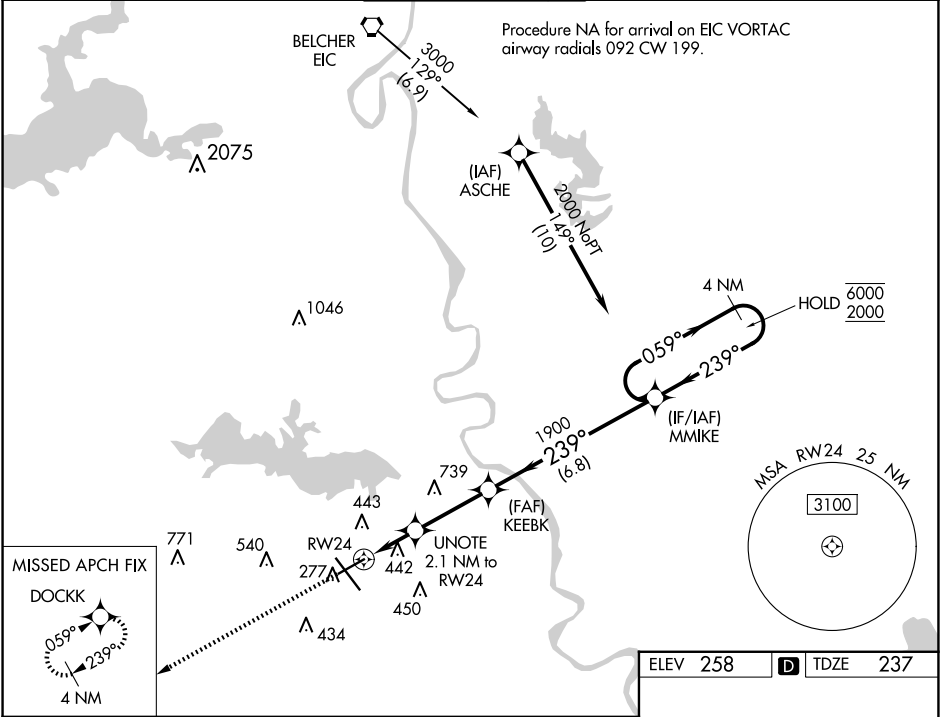

3000 DOCKK				
*LNAV only.				
RW24	*1.3 NM to RW24	UNOTE 2.1 NM to RW24	KEEBK 1900	MMIKE 4 NM Holding Pattern
1900	239°	059°	6000 2000	GP 3.00° TCH 50
1.3 NM	0.8 NM	3 NM	6.8 NM	
CATEGORY	A	B	C	D
LPV DA	487-7⁄8		250 (300-7⁄8)	
LNAV/VNAV DA	749-1¾		512 (500-1¾)	
LNAV MDA	700-1	463 (500-1)	700-1¾	463 (500-1¾)
CIRCLING	760-1	502 (600-1)	980-2 722 (800-2)	1100-2¾ 842 (900-2¾)

