

RNAV (GPS) RWY 11

APCH CRS	Rwy Idg
105°	8000
TDZE	318
Arpt Elev	322


[USN]

GOLIAD NOLF (KNGT)

RNP APCH

MISSED APPROACH: Climb to 4000 direct SWEEN and hold, continue climb-in-hold to 4000.

ASOS 353.675	CTAF 132.875 307.075
-----------------	-------------------------

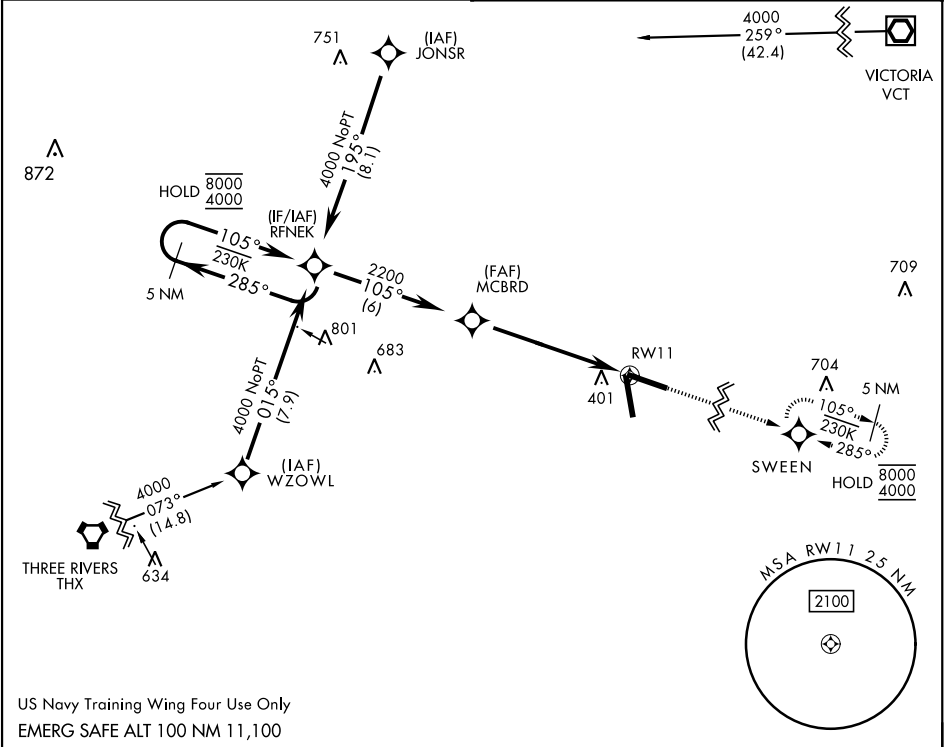

US Navy Training Wing Four Use Only
EMERG SAFE ALT 100 NM 11,100

5 NM Holding Pattern

RFNEK

8000
4000

285°

105°

MCBRD

2200

3.00°

TCH 54

5.7 NM

1.1 NM to RW11

RW11

VDP NA with Beeville Muni altimeter setting.

4000

SWEEN

ELEV 322

TDZE 318

CATEGORY	A	B	C	D
RNAV MDA	720-1 402 (400-1)	720-1½ 402 (400-1½)		
CIRCLING	800-1 478 (500-1)	820-1 498 (500-1)	820-1½ 498 (500-1½)	880-2 558 (600-2)
BEEVILLE MUNI ALTIMETER SETTING MINIMA				
RNAV MDA	760-1 442 (500-1)	760-1¾ 442 (500-1¾)		
CIRCLING	800-1 478 (500-1)	820-1 498 (500-1)	820-1½ 498 (500-1½)	880-2 558 (600-2)

HIRL Rwy 11-29, 17-35

TDZL Rwy 11-29, 17-35

RNAV (GPS) RWY 11

SC-3, 17 APR 2025 to 15 MAY 2025

SC-3, 17 APR 2025 to 15 MAY 2025