

WAAS CH 78032 W18A	APP CRS 181°	Rwy Idg 4098 TDZE 573 Apt Elev 573
--	------------------------	---

RNAV (GPS) RWY 18


SALEM-LECKRONE (SLO)

⚠

Baro-VNAV NA when using Centralia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). When local altimeter setting not received, use Centralia altimeter setting: increase LPV DA to 801 feet; increase LNAV/VNAV DA to 890 feet and visibility 1⁄8 SM; increase all MDAs 40 feet and LNAV Cats C/D visibility 1⁄8 SM and Circling Cats C/D visibility 1⁄4 SM. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2600 direct EMLJ and hold.

AWOS-3PT 118.525	KANSAS CITY CENTER 127.7 351.825	UNICOM 122.725 (CTAF) 0
----------------------------	--	--

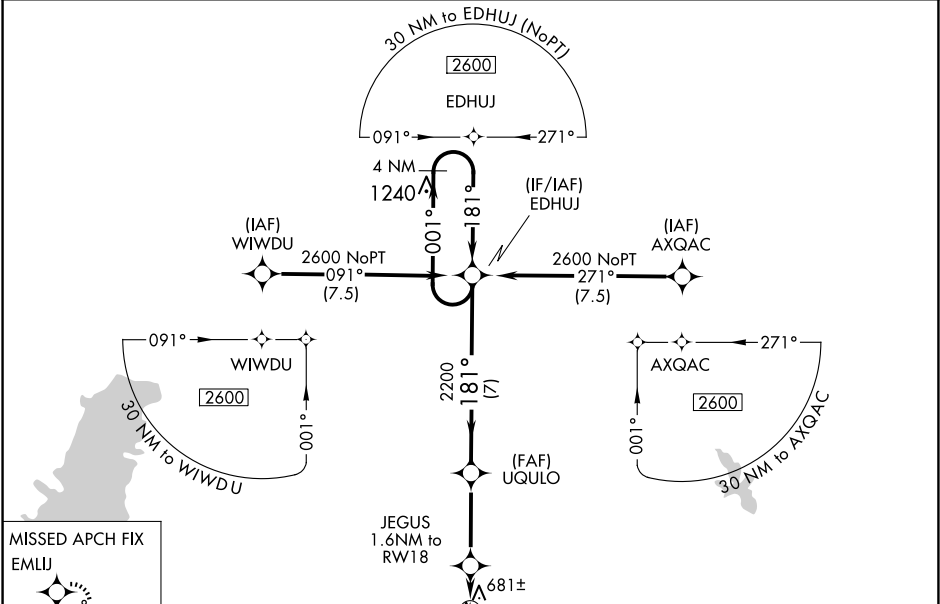

ELEV 573		TDZE 573	
2600		181°	
EMLJ		81	
*LNAV Only		4098 x 75	
RW18 to RW18		36	
1.5 NM		0.1 NM	
3.4 NM		7 NM	
JEGUS 2200		EDHUJ 2200	
1.5 NM		1.6 NM	
0.1 NM		3.4 NM	
3.4 NM		7 NM	
1120		1180	
1100		1000	
900		800	
700		600	
500		400	
300		200	
100		0	
CATEGORY		A	
LPV DA		773-1	
LNAV/VNAV DA		862-1	
LNAV MDA		940-1	
CIRCLING		1040-1	
467 (500-1)		1380-2 1/4	
807 (900-2 1/4)		1380-2 1/2	
807 (900-2 1/2)		REIL Rwy 18-36 0	
		MIRL Rwy 18-36 0	