

WAAS
CH **78331**
W36A

APP CRS
359°

Rwy Idg **3899**
TDZE **680**
Apt Elev **684**

RNAV (GPS) RWY 36

INGERSOLL (CTK)

▼

Baro VNAV NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA when using General Downing-Peoria Intl altimeter setting.



▲

NA

MISSED APPROACH:

Climb to 2500 direct LUYIL and hold.

PIA ASOS 126.1 282.2	SAINT LOUIS APP CON 125.8 269.2	UNICOM 122.8 (CTAF) 0
--------------------------------	---	---------------------------------

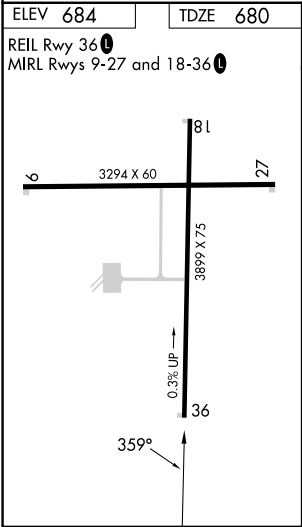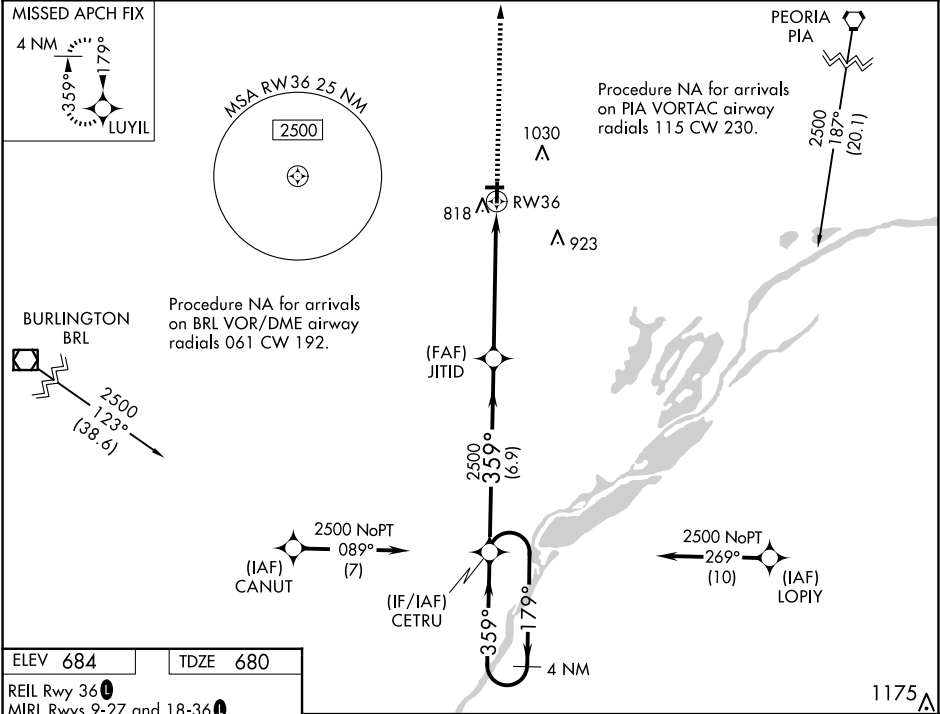

2500	LUYIL	JITID	CETRU	4 NM Holding Pattern
*LNAV only.				
*1.3 NM to RW36				
RW36				
1.3 NM 4.3 NM 6.9 NM				
2500				
359° 179° 359° 2500				
GP 3.00° TCH 40				
CATEGORY	A	B	C	D
LPV DA	976-1 296 (300-1)		NA	
LNAV/VNAV DA	1044-1 364 (400-1)		NA	
LNAV MDA	1180-1 500 (500-1)		1180-1 500 (500-1 3/8) NA	
CIRCLING	1200-1 516 (600-1)	1440-1 756 (800-1)	1440-2 756 (800-2 1/4)	NA

EC-3, 17 APR 2025 to 15 MAY 2025

EC-3, 17 APR 2025 to 15 MAY 2025