

APP CRS 179°	Rwy Idg TDZE Apt Elev	5000 1316 1321
------------------------	-----------------------------	---


RNAV (GPS) RWY 18
FLOYD W JONES LEBANON (LBO)

FLOYD W JONES LEBANON (LB0)


NA When local altimeter setting not received, use Springfield-Branson Ntl altimeter setting. increase LNAV/VNAV DA to 2043 feet; increase all MDAs 120 feet and Circling visibility Cat C/D ½ SM. Baro-VNAV NA when using Springfield-Branson Ntl altimeter setting. Baro-VNAV NA below -17° C (1° F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3500 direct KUPIW and hold.

AWOS-3PT 118,975	SPRINGFIELD APP CON 121.1 290.5	CLNC DEL 123,725	UNICOM 122.8 (CTAF) 0
----------------------------	---	----------------------------	--

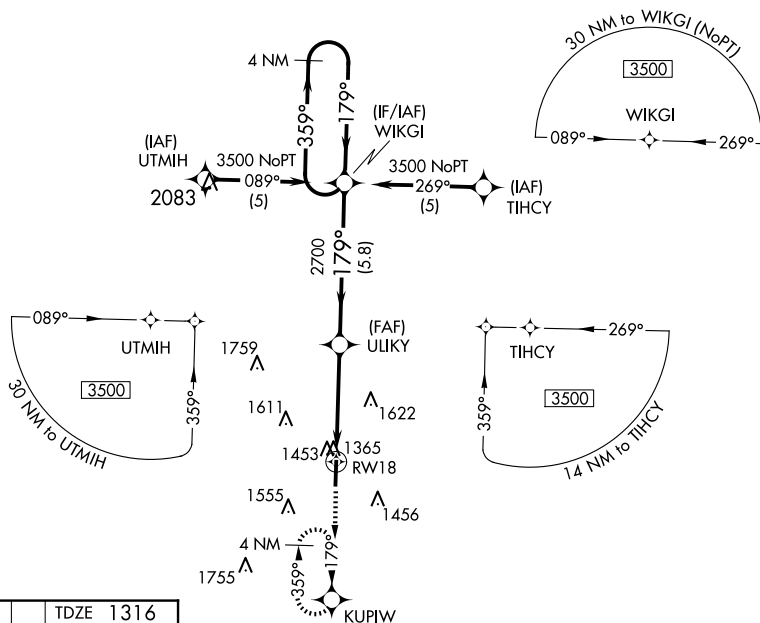

ELEV 1321		TDZE 1316
-----------	--	-----------

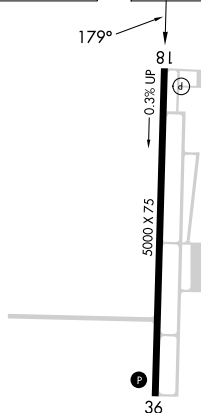
REIL Rwy 18 and 36 **L**MIRL Rwy 18-36 **L**

3500	KUPIW
	

VGSI and descent angles not coincident (VGSI Angle 3.00/ TCH 40).

*LNAV only, VDP NA when using Springfield-Branson Ntl altimeter setting.

4 NM
Holding Pattern

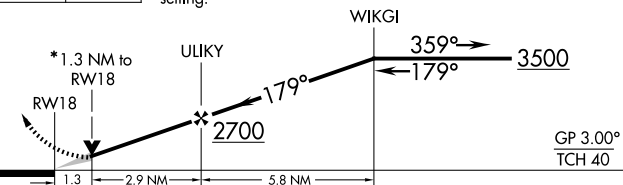

CATEGORY	A	B	C	D
GLS PA DA	NA			
LNAV/ VNAV DA	1937-2 ¼ 621 (700-2¼)			
LNAV MDA	1760-1 444 (500-1)		1760-1¼ 444 (500-1¼)	
CIRCLING	1820-1 499 (500-1)	1860-1 539 (600-1)	1980-1¾ 659 (700-1¾)	1980-2 659 (700-2)