

WAAS CH 73022 W32A	APP CRS 327°	Rwy Idg TDZE 1145 Apt Elev 1145
--	------------------------	---

RNAV (GPS) RWY 32

NORTHWEST MISSOURI RGNL (EVU)

RNP APCH - GPS.


NA

NA

Circling NA east of Rwy 14-32. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 32 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use St. Joseph altimeter setting: increase LPV DA to 1520 feet, LNAV/VNAV DA to 1653 feet and LNAV/VNAV visibility all Cats ¼ SM; increase all MDAs 140 feet and LNAV visibility Cat C ¾ SM. Baro-VNAV and VDP NA when using St. Joseph altimeter setting.

MISSED APPROACH: Climb to 5000 direct PWALK and hold, continue climb-in-hold to 5000.

AWOS-3PT 118.225	MINNEAPOLIS CENTER 119.6 290.4	UNICOM 122.8 (CTAF) 1
----------------------------	--	---------------------------------

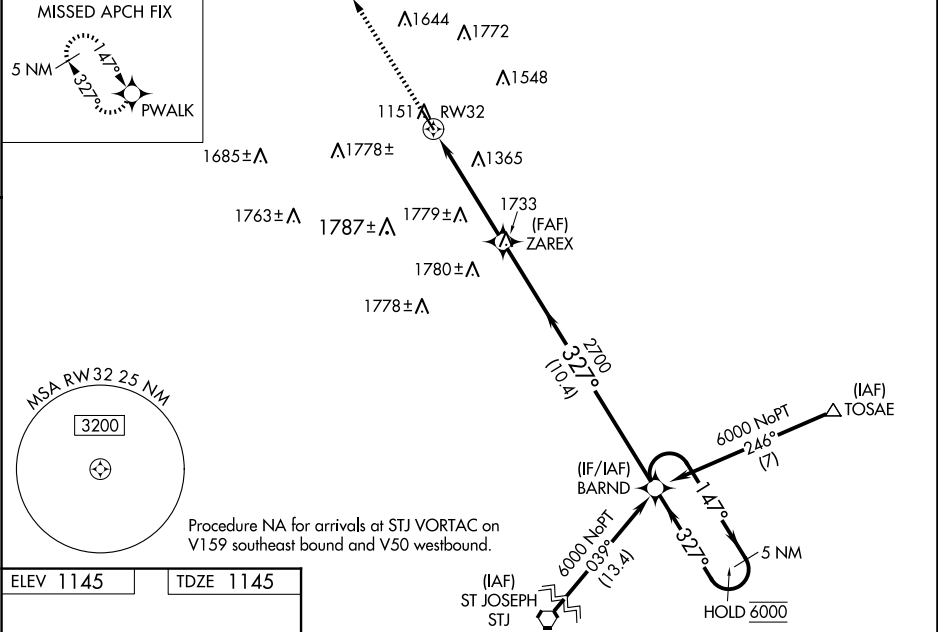

5000	PWALK	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 34).			
		5 NM Holding Pattern			
1.4 NM to RW32		GP 3.00° TCH 40			
CATEGORY	A	B	C	D	
LPV DA	1395-1		250 (300-1)	NA	
LNAV/VNAV DA	1528-1½		383 (400-1½)	NA	
LNAV MDA	1620-1	475 (500-1)	1620-1¾ 475 (500-1¾)	NA	
CIRCLING	1620-1	475 (500-1)	2120-3 975 (1000-3)	NA	