

WAAS CH 45912 W18A	APP CRS 180°	Rwy Idg 5905 TDZE 734 Apt Elev 734
--	------------------------	---

RNAV (GPS) RWY 18


MOUNT STERLING MUNI (I63)

RNP APCH.

T Baro-VNAV NA. Rwy 18 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local
A altimeter setting not received, use Quincy altimeter setting: increase Circling Cat C and
D MDA 60 feet and visibility Circling Cat C and D $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 2700 direct BEWOH and hold.

AWOS-3PT 118.325	UIN ASOS 121.425	KANSAS CITY CENTER 126.225 317.775	UNICOM 122.8 (CTAF) 0
----------------------------	----------------------------	--	---------------------------------

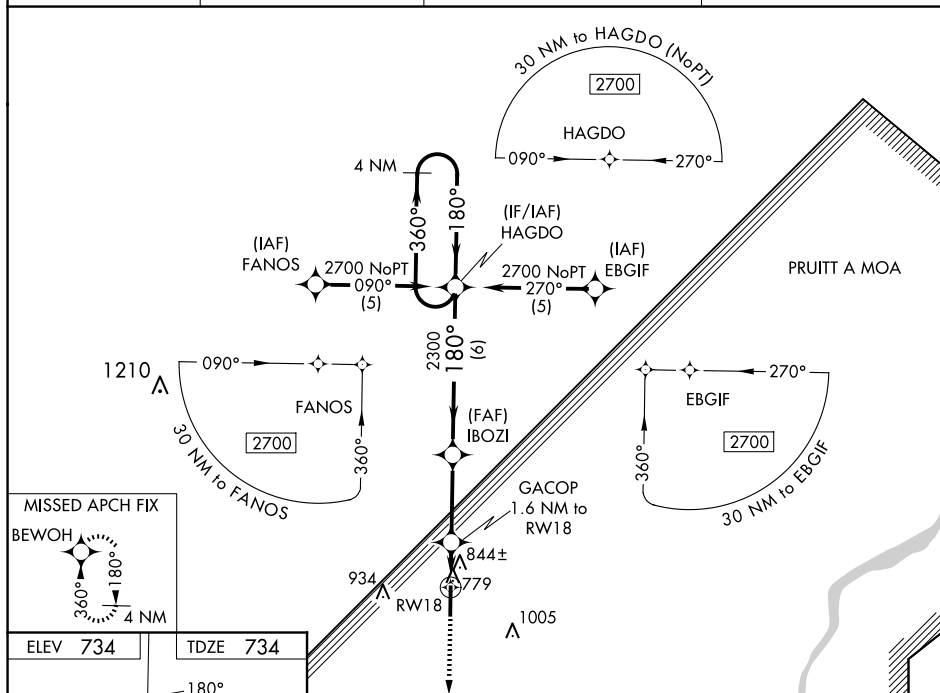

MIRL Rwy 18-36

5905 X 75

0.3% UP

81

36

2700

BEWOH

*LNAV only

RW18

GACOP 1.6 NM to RW18

IBOZI

HAGDO

4 NM Holding Pattern

360°

180°

180°

2700

GP 3.00°

TCH 40'

1.6 NM

3.1 NM

6 NM

1280'

2300'

CATEGORY	A	B	C	D
LPV DA	1066-1¼	332 (400-1¼)		
LNAV/VNAV DA	1191-1¾	457 (500-1¾)		
LNAV MDA	1160-1 426 (500-1)	1160-1¼ 426 (500-1¼)		
CIRCLING	1200-1 466 (500-1)	1360-1¾ 626 (700-1¾)	1360-2 626 (700-2)	

MOUNT STERLING, ILLINOIS

Orig-B 02DEC21

39°59'N-90°48'W

MOUNT STERLING MUNI (I63)

RNAV (GPS) RWY 18

EC-3, 17 APR 2025 to 15 MAY 2025

EC-3, 17 APR 2025 to 15 MAY 2025