

WAAS CH 93916 W32A	APP CRS 321°	Rwy Idg 4001 TDZE 33 Apt Elev 34
--	------------------------	---


RNAV (GPS) RWY 32

OKEECHOBEE COUNTY (OBE)


A Baro-VNAV NA when using Vero Beach altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). Helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA. Procedure NA at night. When local altimeter setting not received, use Vero Beach altimeter setting: increase LPV DA to 360 feet and increase visibility all Cats ¼ SM; increase LNAV/VNAV DA to 575 feet and increase visibility all Cats ¼ SM; increase all MDAs 80 feet and LNAV visibility Cat D and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 2000 direct KEVBE and right turn on track 051° to IDLUW and on track 087° to JABIT and hold.

AWOS-3 118.675	MIAMI CENTER 132.25 370.9	UNICOM 123.0 (CTAF) 0
--------------------------	-------------------------------------	--

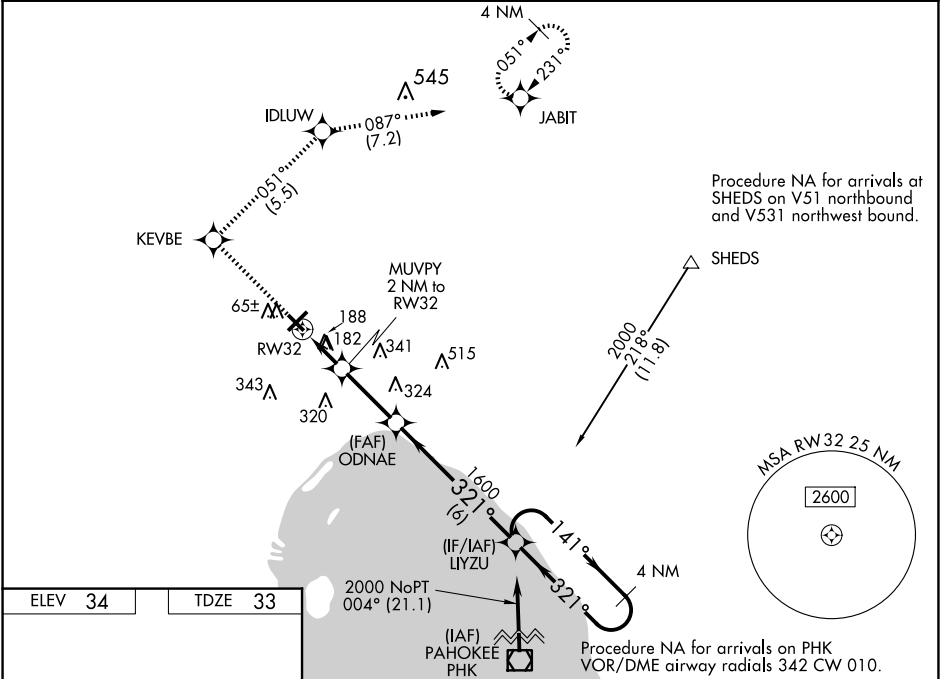

ELEV 34	TDZE 33
----------------	----------------

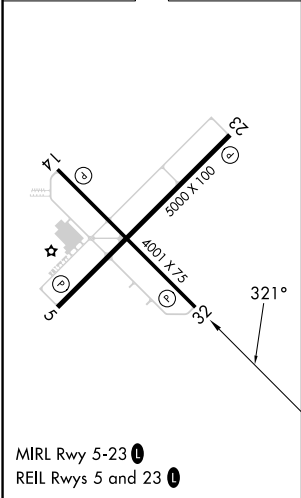

2000	↑ KEVBE	tr 051°	IDLUW	tr 087°	JABIT	4 NM	LIYUZU	Holding Pattern
*LNAV only.		RW32		MUVPY 2 NM to RW32	ODNAE	1600	141° → 2000	GP 3.00° TCH 40
		*700		2 NM		2.7 NM	6 NM	
CATEGORY	A		B		C		D	
LPV DA	283-1		250 (300-1)					
LNAV/VNAV DA	498-1¾		465 (500-1¾)					
LNAV MDA	440-1 407 (500-1)		440-1¼ 407 (500-1¼)					
CIRCLING	500-1 466 (500-1)		660-1¾ 626 (700-1¾)		660-2 626 (700-2)			

SE-3, 17 APR 2025 to 15 MAY 2025

SE-3, 17 APR 2025 to 15 MAY 2025