


WAAS CH 86426 W21A	APP CRS 214°	Rwy Idg TDZE 1348 Apt Elev 1348	5002
--	------------------------	---	-------------

RNAV (GPS) RWY 21

BRANSON WEST MUNI/EMERSON FLD (FWB)

▼ NA DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Branson altimeter setting; increase all DA 39 feet and all MDA 40 feet; increase LPV Cat A/B visibility to 1 mile and LNAV/VNAV Cat A/B visibility to 1¼. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). VDP and Baro-VNAV NA when using Branson altimeter setting.	MISSED APPROACH: Climb to 3400 direct EDJON and hold.
---	---

AWOS-3PT 119.725	SPRINGFIELD APP CON 126.35	UNICOM 123.0 (CTAF) 1
----------------------------	--------------------------------------	---------------------------------

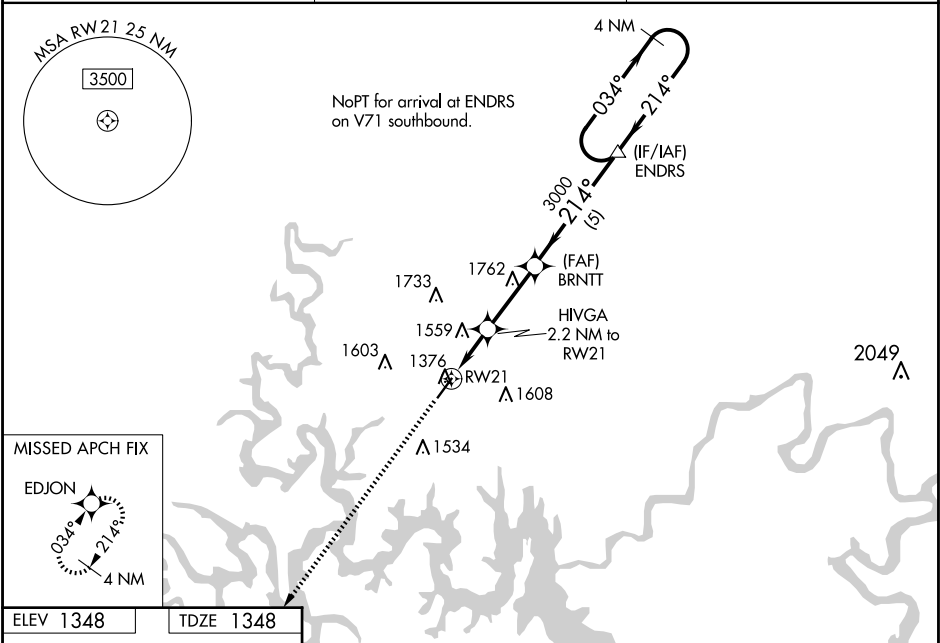

ELEV 1348

TDZE 1348

3400

EDJON

*LNAV only

HVGGA 2.2 NM to RW21

BRNTT 3000

ENDRS

4 NM Holding Pattern

3000

GP 3.00° TCH 40

214°

3000

2080*

214°

3000

214°

3000

1.2 NM

1 NM

2.9 NM

5 NM

CATEGORY	A	B	C	D
LPV DA	1598-1	250 (300-1)		NA
LNAV/VNAV DA	1832-1½	485 (500-1½)		NA
LNAV MDA	1800-1	452 (500-1)		NA
CIRCLING	1900-1	552 (600-1)		NA