

WAAS CH 50146 W15A	APP CRS 153°	Rwy Idg TDZE Apt Elev	6001 6878 6878
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 15
MEADOW LAKE (FLY)

RNP APCH - GPS.

T Rwy 15 helicopter visibility reduction below 1 SM NA. For uncompensated
A Baro-VNAV systems, LNAV/VNAV NA below -28°C or above 54°C.
 Circling NA southwest of Rwy 15-33. Circling NA to Rwy 16, 26, 8 and 34.
 Straight-in Rwy 15 NA at night, Circling Rwy 15 NA at night.

MISSED APPROACH: Climb to 7400, then climbing left turn to 9800 direct ADANE and hold. continue climb-in-hold to 9800.

AWOS-3PT 118.45	SPRINGS APP CON 124.0 257.875	UNICOM 122.7(CTAF) 0
---------------------------	---	--------------------------------

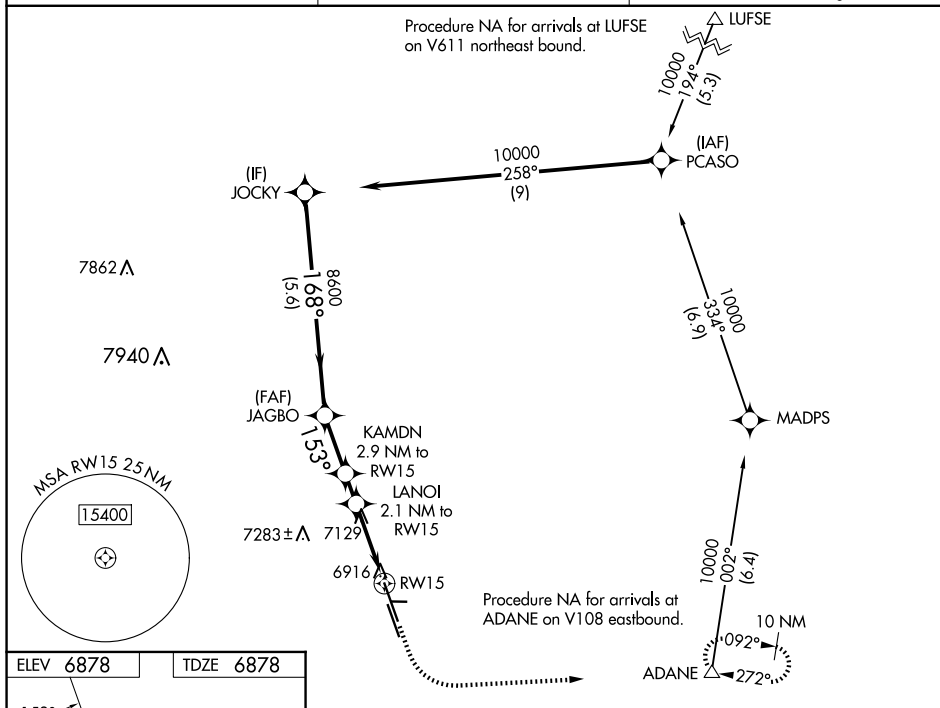

ELEV 6878		TDZE 6878
-----------	--	-----------

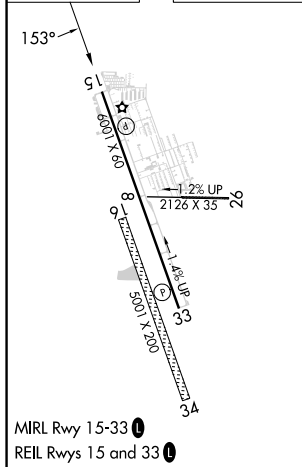


Diagram illustrating a non-coincident VGS and RNAV glidepath. The path is divided into four segments (A, B, C, D) with distances and bearings. The path is labeled with altitudes and a bearing of 168° for the first segment. The path is also labeled with 'GP 3.50° TCH 59' and 'RW15'.

CATEGORY	A	B	C	D
LPV DA	7176-1	298 (300-1)		NA
LNAV/VNAV DA	7343-1 ³ / ₈	465 (500-1 ³ / ₈)		NA
LNAV MDA	7400-1	522 (600-1)		NA
CIRCLING	7400-1 522 (600-1)	7440-1 562 (600-1)		NA