

VOR/DME or TACAN Y RWY 13R

[USN]

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

VORTAC CRP 115.5 Chan 102	APCH CRS 139°	Rwy Idg 8001 TDZE 13 Arpt Elev 18
---	-------------------------	--


T * When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1½ miles.
 ** When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1¾ miles.



MISSED APPROACH: Climb to 1600 on CRP VORTAC R-138 to VCCCC and hold.


ATIS ★ 127.9 290.9	APP CON 128.675 343.75	NAVY CORPUS TOWER ★ 134.850 340.2	GND CON 118.7 257.85	CLNC DEL 314.3	ASR/ PAR
-----------------------	---------------------------	--------------------------------------	-------------------------	-------------------	-------------

When local altimeter setting not received,
use Corpus Christi (CRP) Intl altimeter setting.

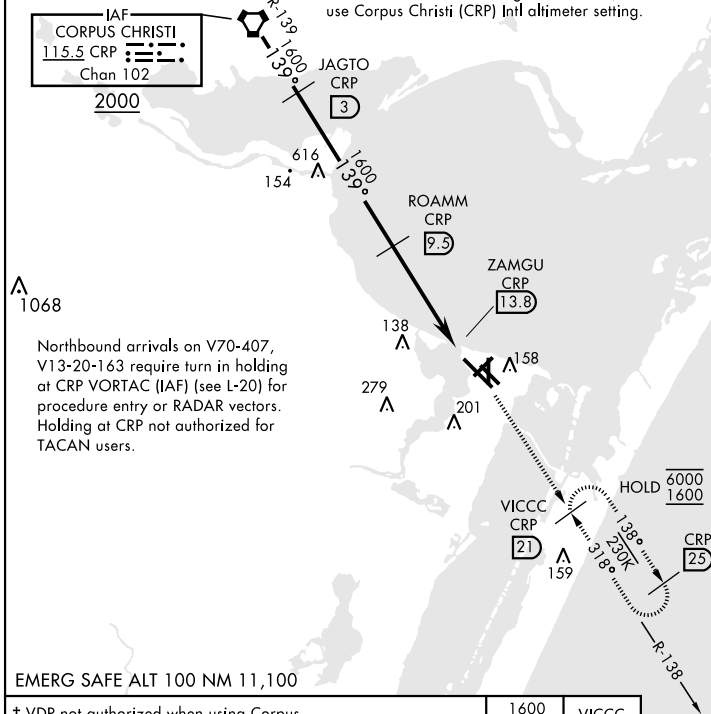


EMERG SAFE ALT 100 NM 11,100

† VDP not authorized when using Corpus Christi (CRP) Intl altimeter setting.

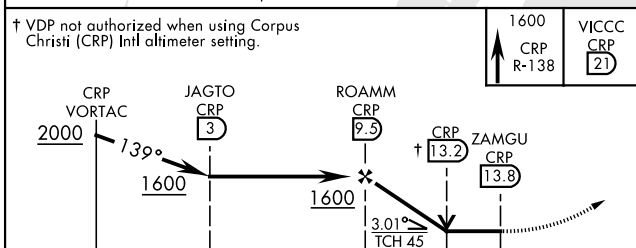

		← 4.3 NM → 0.5	
CATEGORY	A	B	D
S-13R *	420-¾ 407	(500-¾)	420-1 407 (500-1)
CIRCLING	460-1 442 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½) 580-2 562 (600-2)
CORPUS CHRISTI (CRP) INTL ALTIMETER SETTING			
S-13R **	460-¾ 447	(500-1¾)	460-1 447 (500-1)
CIRCLING	500-1 482 (500-1)		540-1½ 522 (600-1½) 620-2 602 (700-2)



HIRL Rwy 4-22, 13R-31L **L**
HIRL Rwy 13L-31R, 18-36
REIL Rwy 4-22, 13L-31R, 18-36, 31L