

VORTAC MLU	APP CRS	Rwy Idg
117.2	236°	7504
Chan 119		TDZE 78
		Apt Elev 79

VOR RWY 22
MONROE RGNL (MLU)

DME required.

⚠


Circling Rwy 14 NA at night. Rwy 22 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase S-22 Cat A/B ASR visibility to 1 SM, and Cat C/D to 1½ SM.

MALS R


⚠

MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold, continue climb-in-hold to 3000.

ATIS 125.05	MONROE APP CON ★ 118.15 290.475	MONROE TOWER ★ 118.9 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.65	UNICOM 122.95
-----------------------	---	---	-------------------------	---------------------------	-------------------------

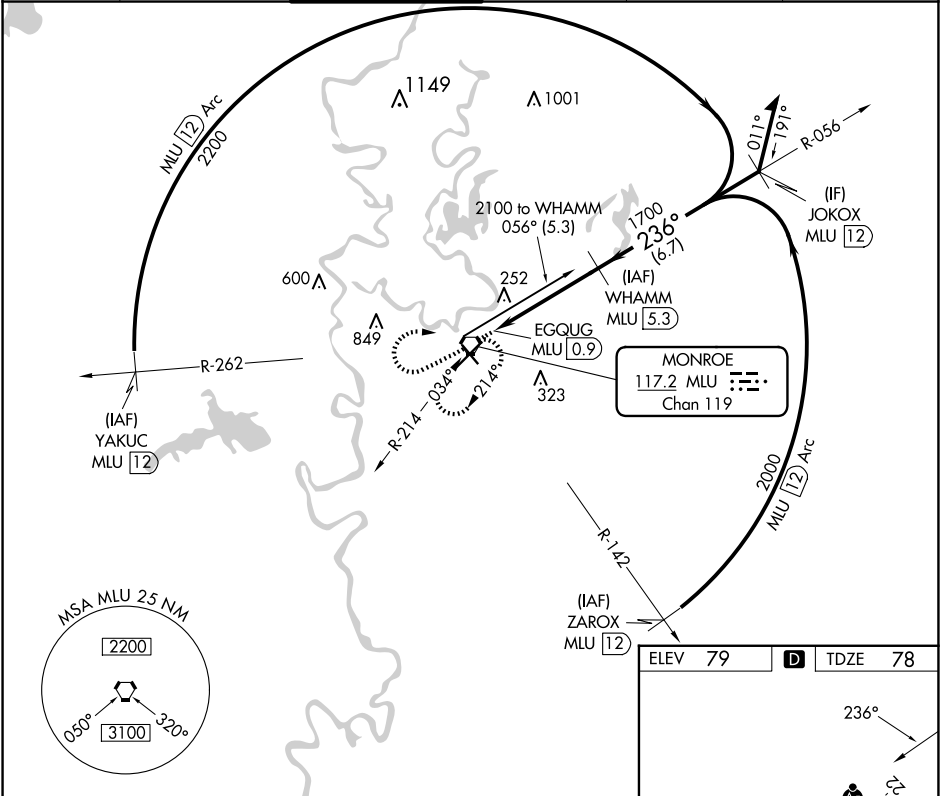

1800	3000	MLU				
↑	↷	⬡				
			WHAMM MLU 5.3		Remain within 10 NM	
			056°		2100	
MLU VORTAC			236°		1700	
EGGUG MLU 0.9			≤ 3.00° TCH 50			
0.5			0.9		3.6 NM	
CATEGORY	A		B		C	D
S-22	560-¾ 482 (500-¾)				560-1	482 (500-1)
CIRCLING	560-1 481 (500-1)		580-1 501 (600-1)		740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)

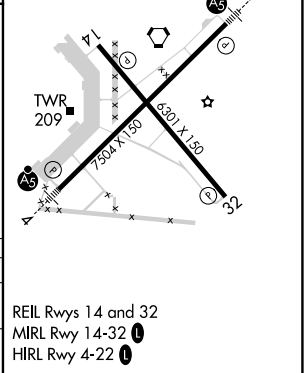

SC-4, 15 MAY 2025 to 12 JUN 2025

SC-4, 15 MAY 2025 to 12 JUN 2025